

Quick Charge Station

Overview

- Fast-charge any compatible vehicle
- 0 to 80% in less than 1 hour
- Multi-standard (DCA - CHAdeMO; DCC - CCS/Combo; AC)
- Simultaneous charging of DC and AC
- Color screen (for user interface and publicity)
- Network integration (OCPP or proprietary protocol)
- Built-in communications (3G; LAN; Wi-Fi)



Fast Charging



User-friendly



Communication & Management



Multi-standard

AC and DC plug-in charging systems



CCS



CHAdeMO

AC ~

Product description

The Efacec EV DC Quick Charger can be used to charge all EVs with CHAdeMO, CCS or AC Type-2 (fast) charging standard compliance. It has a maximum DC output power of 25 kW.

The DC Quick Charger is a user-friendly and safe process to fast charge your vehicle. After user identification (if authentication is required), by simply choosing the charging standard compatible to your vehicle and coupling the charger's output plug to the EV, you will have a fast secured and proven charging process. The battery charging status is displayed and the charging cycle finishes by itself or can be terminated by a user command. For AC mode, battery status is not displayed.

Different output options are available, like the basic single DC output, dual DC output or even triple DC+AC outputs, in a single cabinet or bundled with a wired charging interface kiosk.


The DC Quick Charger includes Efacec's power electronics unique design, resulting in top specifications for DC fast charging. Higher power output with best power factor and efficiency.

Main features

- Multiple standards
- Multiple outputs
- DC up to 25 kW
- AC up to 22 kW
- High efficiency: > 94%
- High power factor: 0.98
- Simple plug & play installation
- Standalone or network integrated charger
- Local and remote monitoring and control
- Customized personalization
- C4 corrosion protection (equivalent to stainless steel)

Technical data	CE
Nominal Input	
Phases / lines	3 phases + neutral + PE
Voltage & frequency	400 Vac ± 10 %; 50 Hz
Nominal input current & power	32A, 22 kVA
Efficiency	> 94 %
Power factor	0,98
AC Nominal Input (Optional)	
Phases / lines	1P or 3P + neutral + PE
Voltage & frequency	400 Vac ± 10 %; 50 Hz
Nominal input current & power	Up to 32A, 22 kVA
DC Output	
Voltage	50 Vdc to 500 Vdc
Current	0 to 50 A
Nominal Power (@ 400V)	Up to 20 kW
Maximum power	25 kW
AC Output (optional)	
Voltage	230 V or 400 V
Current	from 16 A up to 32 A
Nominal Power	from 3,7 kVA up to 22 kVA
General Specifications	
Equipment	Multi-standard DC outputs (Mode-4), with optional AC (Mode-3)
Communication with EV	JEVS G104 (CHAdeMO) IEC61851-23 PLC (CCS / Combo-2) IEC61851-1 (AC)
DC Plugs	JEVS G105 (CHAdeMO) Combo T2 (CCS / Combo-2)
AC Plug (or socket)	IEC62196 Type-2
Human Machine Interface	By default 6,4" TFT Color screen Mifare (Classic, DesFire EV1) or others on request Communication 3G (GSM or CDMA) LAN Wi-Fi
Communication Protocols	OCPP (1.2; 1.5) and others
Place of installation	Indoor/Outdoor
Altitude	Up to 1000 m
Protection degree	IP54 IK10
Operating Temperature	-25 °C to +50 °C
Optional Cold Option	-35 °C to +50 °C
Storage Temperature	-40 to +60 °C
Humidity Range	5 % to 95 %
Noise Level	<55 dB in all directions
Dimensions (W x D x H)	630 x 457 x 1922 mm
Weight	325 Kg

Configurations

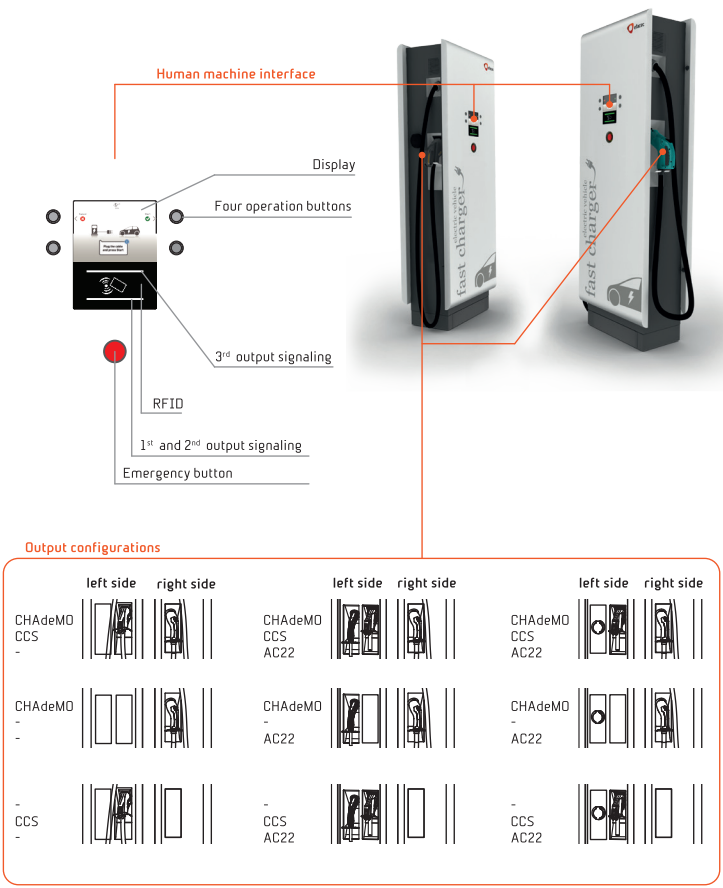

Applications

- Restaurants
- Shopping centers
- EV Infrastructure and operators
- EV fleet (private and public)
- EV dealers and service providers

