

## MODEL 62000L SERIES

### KEY FEATURES

- Voltage range: 0 ~ 60V  
Current range: 0 ~ 7A  
Power range: 0 ~ 150W
- Wide range of voltage & current combinations in constant power
- Clean and stable power with programmability at an affordable price
- Low noise: < 3mVp-p
- High transient response time: < 50us
- High-speed programming
- Precision V&I measurements
- Standard GPIB/USB interface
- Remote sense (Model 62010L-36-7 only)
- Master-slave parallel and serial control (Model 62010L-36-7 only)
- 8 steps for auto sequencing programming
- 16 storage locations for user-defined operating states
- OVP, Current limit, Thermal protection
- CE Certified

### APPLICATIONS

- Laboratory and system integration
- Automotive electronic components
- University and 3C products
- Mobile, IC driving power, wireless and communication power
- Low noise for aircraft applications



Autorange Output



Fast Transient < 50 us



Low Noise < 3 mVp-p



Auto Sequencing Mode

## PROGRAMMABLE DC POWER SUPPLY MODEL 62000L SERIES

The Chroma 62000L Series Programmable DC power supplies have low noise linear performance and fast transient response. The units have many unique functions that are targeted for overall automated test system integration, automotive power electronics MCU/ECU, power semiconductors, wireless communications, etc. The 62000L Series is a high quality yet cost effective programmable DC Source, designed to meet the stringent requirements of the next generation of power electronics.

The GPIB and USB control interfaces come standard with the 62000L Series, no additional purchase required. The 62000L Series can be easily remote controlled via either of these two interfaces. The 62000L weighs less than 2.5 kg, and its case measures 214.6Wx88.6H x280D mm. Its light weight and compact size makes it easy to handle and stack safely.


Auto-ranging allows you to freely adjust voltage and current. This feature eliminates the need to manually select the optimum range allowing all of the power to be available across all of the voltage and current settings

If there are applications that need voltages and currents greater than the rated maximum outputs, this can be achieved using multiple power supplies. The power supply can output an extended range of voltages or currents by connecting more units. Up to 7 units can be connected at the same time, using a series-parallel connection to achieve greater voltage (up to 252V) and current (up to 49A) output.



**Chroma**


## 62000L FEATURES AND APPLICATIONS

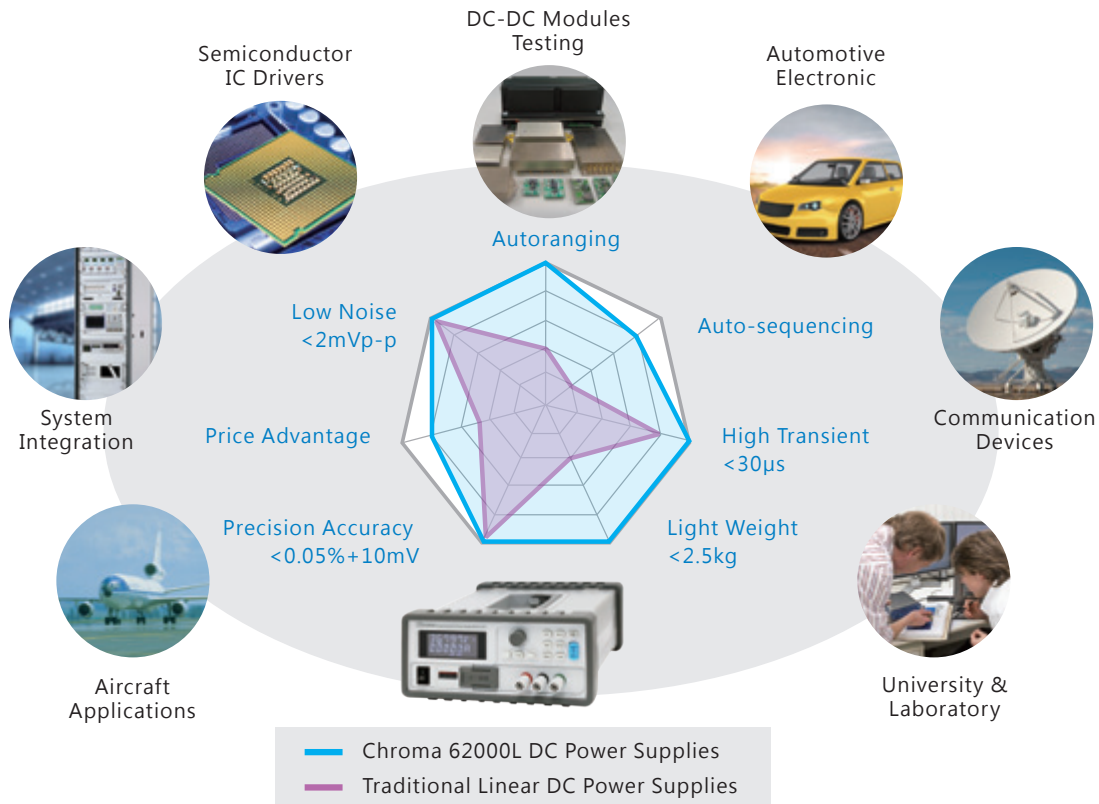

### AUTORANGING OUTPUT

The 62000L Series Programmable DC power supplies have wide operating ranges. Chroma's model 62015L-60-6 for example, the output specification 150W/60V/6A can operate under different combinations as the figure shows below while other common DC power supplies can only achieve the maximum output power of a single point.

For wide range voltage and current applications, one DC power supply can be used to test the input of both low voltage/high current and high voltage/low current UUTs. When integrated into a standard ATE, one 62000L series DC power supply can replace multiple DC power supplies to significantly reduce cost and save space.

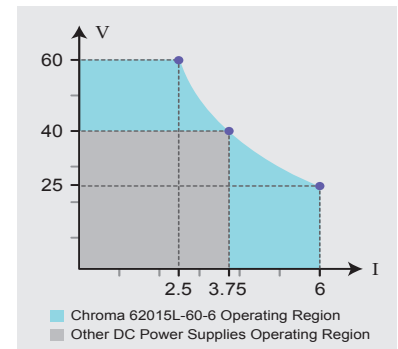

Autoranging Output

### MASTER-SLAVE CONTROL


The 62000L Series master-slave control has 4 modes listed as follows :

**Parallel Mode** : The master-slave parallel control connects multiple power supplies to extend the current output.

**Series Mode** : The master-slave parallel control connects multiple power supplies to extend the voltage output.

**Normal mode** : The master-slave normal control follows the delay time set by each power supply to output from the master.


**Track Mode** : The master-slave track mode tracks each power supply to synchronize with the output voltage and status of master.

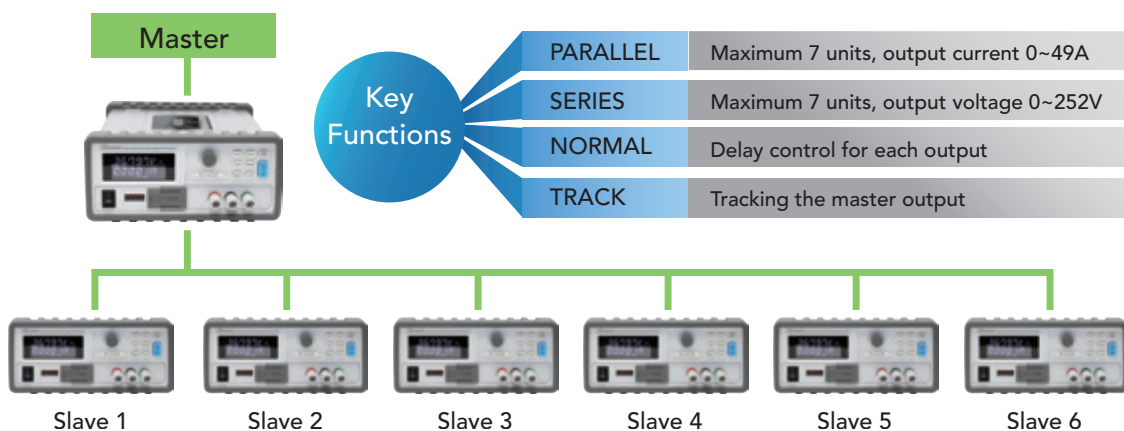

## HIGH TRANSIENT RESPONSE

The 62000L Series features the state-of-the-art DC power supply design with high transient response for output voltage. Take the model 62010L-36-7 for example, when the output current changes from 3.5A to 7A at the speed of 1A/us, the voltage change of actual output can return to 15mV within 10.1us.

For dynamic load change, the 62000L Series can quickly react in order to give a stable DC output, as well as reducing the surge voltage generated by load change that could damage the UUT. As to non-static products or test applications, the 62000L Series can timely provide a stable DC power supply.

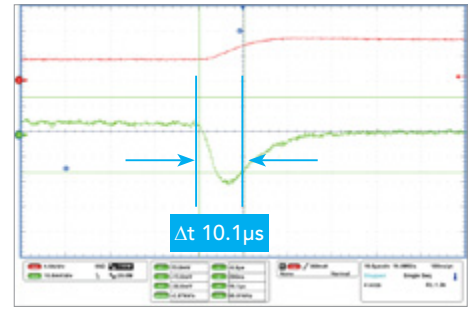


High Transient Response

## LOW OUTPUT NOISE

The 62000L Series provides pure and stable DC power. For example, the 62010L-36-7 output voltage noise is 1.18mVp-p (20~20MHz) under the maximum rated current and maximum output power.


For precision products that require strict power quality, such as semiconductor testing and IC drive, the 62000L Series is able to comply with the product specification to protect the UUT from the interference of heavy noise providing low ripple and low noise input power with pure quality.

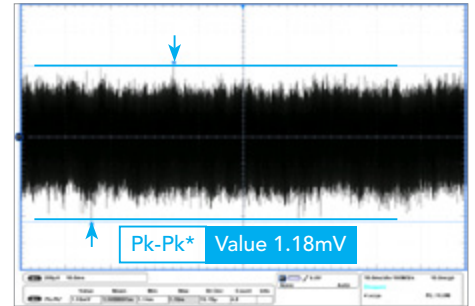

Low Output Noise


## AUTO SEQUENCING PROGRAMMING

The auto sequencing programming function built into the 62000L Series allows the user to define and edit the output waveforms and cycles desired. Using 8 steps per cycle, each step can set the time for voltage to rise or fall as well as to dwell. This function can also be applied to the waveform signal simulation test of power electronics and the power simulation test of automotive electronics by editing the required output voltages following the UUT test criteria.

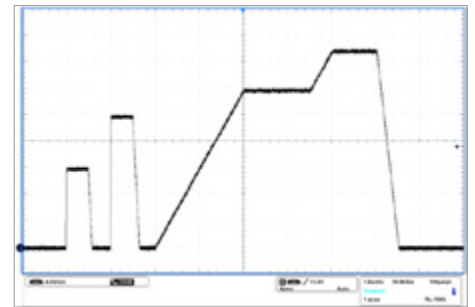

Auto Sequencing Programming

## PANEL DESCRIPTION

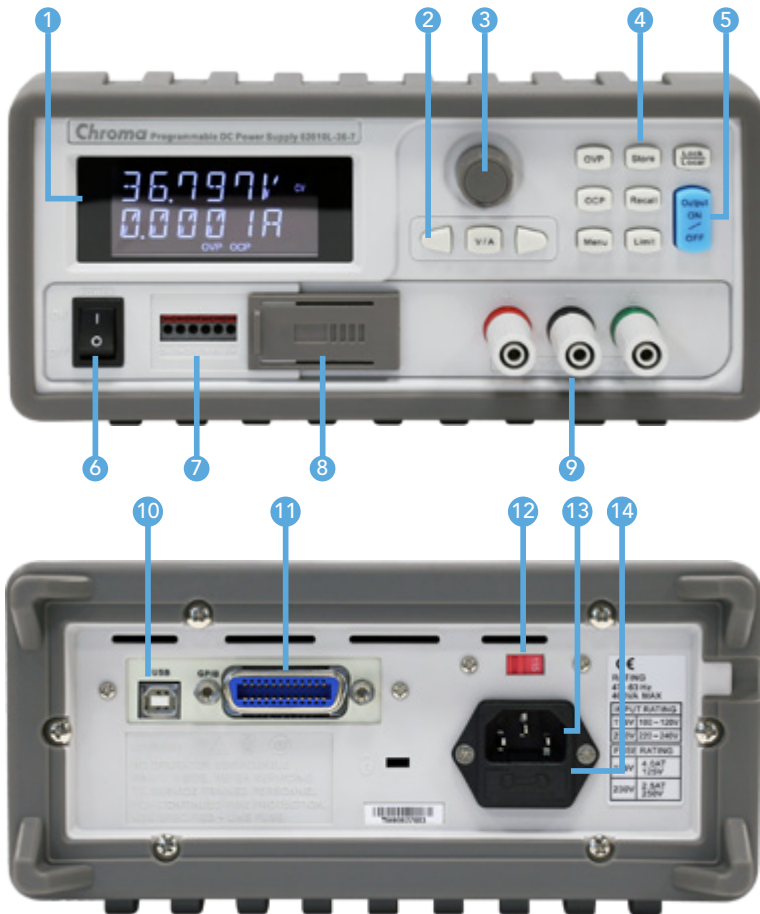

1. **Display**  
Display setting, readings and operating status
2. **Voltage/Current Key**  
Set the output voltage/output current limit
3. **Rotary Key**  
Adjust the V&I and set the parameter
4. **Function Key**  
Operation function selection
5. **Output Key**  
Enable or disable the output
6. **Power Switch**  
AC power on/off
7. **Master-Slave Mode and Remote Sense Terminal**  
Set the Master-Slave series/parallel & remote sense (Model 62010L-36-7)
8. **Cover**  
Dust cover (Model 62010L-36-7)
9. **Output Terminal**  
Connect the output cable to a UUT
10. **USB Interface (Standard)**
11. **GPIB Interface (Standard)**
12. **Power-Line Voltage Setting**  
110V/220V AC setting
13. **Power Line Inlet**
14. **Fuse Holder**

## GENERAL SPECIFICATIONS

Model	62010L-36-7	62015L-60-6
<b>Output Ratings</b>		
Output Voltage	0~36V	0~60V
Output Current	0~7A	0~6A
Output Power	108W	150W
<b>Line Regulation</b>		
Voltage	0.01%+2mV	0.01%+2mV
Current	0.01%+250uA	0.01%+250uA
<b>Load Regulation</b>		
Voltage	< 0.01%+2mV	< 0.01%+2mV
Current	< 0.01%+250uA	< 0.01%+250uA
<b>Measurement Accuracy</b>		
Voltage	0.05%+5mV	0.05%+5mV
Current	0.15%+5mA	0.15%+5mA
<b>Output Noise &amp; Ripple</b>		
Voltage Noise (p-p)	< 2mVp-p	< 3mVp-p
Voltage Ripple (rms)	< 0.35mVrms	< 0.5mVrms
Current Ripple (rms)	< 2mArms	< 2mArms
<b>Transient Response Time</b>		
100% to 50% load change	< 30uA	< 50uA
<b>Temperature Coefficient</b>		
Voltage	0.01%+3mV	0.01%+10mV
Current	0.02%+3mA	0.02%+3mA
<b>Drift</b>		
Voltage	0.02%+1mV	0.05%+10mV
Current	0.1%+1mA	0.15%+2mA
<b>Programming &amp; Measurement Resolution</b>		
Voltage (Front Panel)	1mV	10mV
Current (Front Panel)	0.1mA	1mA
Voltage (Remote Interface)	1mV	1mV
Current (Remote Interface)	0.1mA	0.21mA
Voltage (Analog Programming Interface)	1mV	1mV
Current (Analog Programming Interface)	0.21mA	1mA
<b>Programming Accuracy</b>		
Voltage	0.05%+10mV	0.05%+10mV
Current	0.2%+10mA	0.2%+10mA
<b>Programming Response Time</b>		
Rise Time (Full Load)	< 40ms	< 100ms
Rise Time (No Load)	< 20ms	< 35ms
Fall Time (Full Load)	< 40ms	< 50ms
Fall Time (No Load)	< 400ms	< 500ms
Measure Voltage, Current (under GPIB command using Measure)	< 20ms	< 20ms
AC Input Operating Voltage Range	1 $\phi$ 100~120Vac $\pm$ 10% $V_{IN}$ , 1 $\phi$ 220~240Vac $\pm$ 10% $V_{IN}$ , 47~63 Hz	
Interfaces	USB & GPIB standard	
Dimension (H x W x D)	88.6 x 214.6 x 280.7 mm/3.49 x 8.45 x 11.05 inch	
Weight	< 2.5 kg/5.5 lbs	

\* All specifications are subject to change without notice.

## ORDERING INFORMATION

62010L-36-7 : Programmable DC Power Supply 36V/7A/108W with GPIB & USB Interface

62015L-60-6 : Programmable DC Power Supply 60V/6A/150W with GPIB & USB Interface

B620001 : 19" Rack Mounting Kit for Model 62000L Series (2U model x 1)

HEADQUARTERS  
CHROMA ATE INC.  
66 Huaya 1st Road,  
Guishan, Taoyuan  
33383, Taiwan  
T +886-3-327-9999  
F +886-3-327-8898  
www.chromaate.com  
info@chromaate.com

U.S.A.  
CHROMA SYSTEMS  
SOLUTIONS, INC.  
19772 Pauling,  
Foothill Ranch,  
CA 92610  
T +1-949-600-6400  
F +1-949-600-6401  
www.chromausa.com  
sales@chromausa.com

EUROPE  
CHROMA ATE  
EUROPE B.V.  
Morsestraat 32,  
6716 AH Ede,  
The Netherlands  
T +31-318-648282  
F +31-318-648288  
www.chromaeu.com  
sales@chromaeu.com

CHROMA ATE GERMANY  
Südtiroler Str. 9, 86165, Augsburg, Germany  
T +49-821-790967-0  
F +49-821-790967-600  
support-germany@chromaeu.com

JAPAN  
CHROMA JAPAN CORP.  
888 Nippa-cho, Kouhoku-ku,  
Yokohama-shi, Kanagawa,  
223-0057 Japan  
T +81-45-542-1118  
F +81-45-542-1080  
www.chroma.co.jp  
info@chroma.co.jp

CHINA  
CHROMA ELECTRONICS  
(SHENZHEN) CO., LTD.  
8F, No.4, Nanyou Tian An  
Industrial Estate, Shenzhen,  
China PC: 518052  
T +86-755-2664-4598  
F +86-755-2641-9620  
www.chroma.com.cn  
info@chromaate.com

SOUTHEAST ASIA  
QUANTEL PTE LTD.  
(A company of Chroma Group)  
46 Lorong 17 Geylang # 05-02  
Enterprise Industrial Building,  
Singapore 388568  
T +65-6745-3200  
F +65-6745-9764  
www.quantel-global.com  
sales@sg.quantel-global.com