

FEATURES

- Generates + and – from Single Input
- Up to $\pm 18\text{V}$ Output
- Only Needs Four $1\mu\text{F}$ Capacitors
- No Inductors
- 10mA Output Current Minimum
- Operates Down to 4V
- No Latchup
- 8-Pin Minidip

APPLICATIONS

- Line Drivers
- Op Amp Suppliers
- Battery Splitters
- RS232 Power

DESCRIPTION


The LT[®]1026 is a switched capacitor voltage doubler and inverter on a single monolithic die. Capable of operating from a 4V to 10V input, it provides $\pm 7\text{V}$ to $\pm 18\text{V}$ output. Output currents of over 10mA are available. Two charge pumps first double the input voltage then invert the doubled voltage. Manufactured in bipolar technology, the LT1026 is not susceptible to latchup and generates up to 36V.

The LT1026 offers a convenient way of generating additional system voltages without using inductors. Powering interface circuits, op amps or data acquisition circuitry off logic supplies is simplified.


 LTC and LT are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

Voltage Doubler and Inverter

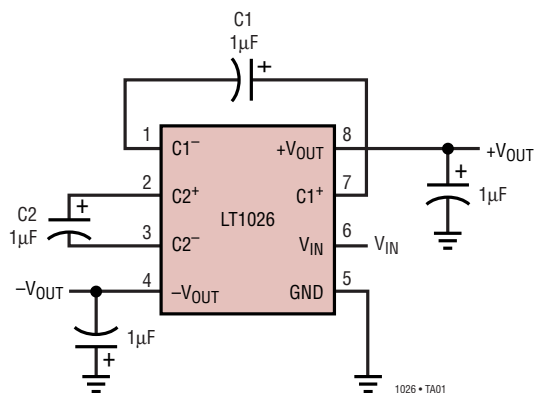

Output Voltage

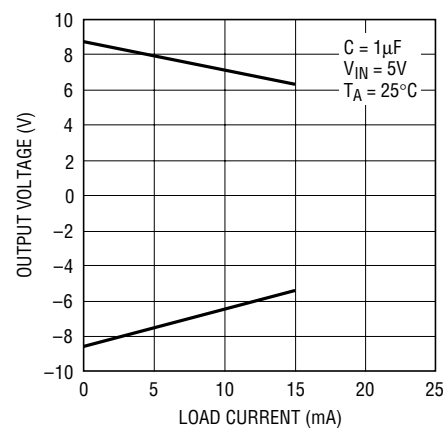

LT1026 • TA02

ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage	10V	Operating Temperature Range	
V^+	20V	LT1026C	0°C to 70°C
V^-	-20V	LT1026I	-40°C to 85°C
Short-Circuit Duration	10 sec	LT1026M (OBSOLETE)	-55°C to 125°C
		Lead Temperature (Soldering, 10 sec)	300°C

PACKAGE/ORDER INFORMATION

TOP VIEW H PACKAGE 8-LEAD TO-5 METAL CAN $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 150^{\circ}\text{C/W}$	TOP VIEW J8 PACKAGE 8-LEAD CERDIP $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 150^{\circ}\text{C/W}$	TOP VIEW N8 PACKAGE 8-LEAD PDIP $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 100^{\circ}\text{C/W}$ (N8) $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 150^{\circ}\text{C/W}$ (S8)	TOP VIEW S8 PACKAGE 8-LEAD PLASTIC SO $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 100^{\circ}\text{C/W}$ (N8) $T_{JMAX} = 150^{\circ}\text{C}$, $\theta_{JA} = 150^{\circ}\text{C/W}$ (S8)
ORDER PART NUMBER	ORDER PART NUMBER	ORDER PART NUMBER	S8 PART MARKING
LT1026CH LT1026MH	LT1026CJ8 LT1026MJ8	LT1026CN8 LT1026CS8 LT1026IS8	1026 1026I
OBSOLETE PACKAGES Consider the N8 or S8 Packages for Alternate Source			

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}\text{C}$.

PARAMETERS	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	$V_{IN} = 4\text{V}$				
	$I_L = 0\text{mA}$ Positive	● 6.5	7		V
	$I_L = 0\text{mA}$ Negative	● -6	-6.7		V
	$I_L = 10\text{mA}$ Positive	● 5.25	5.7		V
	$I_L = -10\text{mA}$ Negative	● -4.5	-5		V
	$V_{IN} = 5\text{V}$				
	$I_L = 15\text{mA}$ Positive	● 6.25	7		V
	$I_L = -15\text{mA}$ Negative	● -5.5	-6.2		V
	$V_{IN} = 10\text{V}$				
	$I_L = 0\text{mA}$ Positive	● 18	18.5		V
	$I_L = 0\text{mA}$ Negative	● -17.7	-18		V
	$I_L = 10\text{mA}$ Positive	● 16	17.6		V
	$I_L = -10\text{mA}$ Negative	● -15.3	-17		V
	$I_L = 15\text{mA}$ Positive	● 15.25	17		V
	$I_L = -15\text{mA}$ Negative	● -14.5	-16.5		V
	$V_{IN} = 5\text{V}$				
	$I_L = 10\text{mA}, -10\text{mA}$ Positive	● 6.25	7.2		V
	$I_L = 10\text{mA}, -10\text{mA}$ Negative	● -5.5	-6.5		V
	$V_{IN} = 10\text{V}$				
	$I_L = 10\text{mA}, -10\text{mA}$ Positive	● 15	16.8		V
	$I_L = 10\text{mA}, -10\text{mA}$ Negative	● -14.25	-15.75		V

1026fb

ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^\circ\text{C}$.


PARAMETERS	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Current	$V_{IN} = 4\text{V}$ $I_L = 0\text{mA}$ ●		7	12.5	mA
	$V_{IN} = 10\text{V}$ $I_L = 0\text{mA}$ ●		15	30	mA

Note 1: Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.

Note 2: $V_{IN\text{ min}} = -4.5$ for $T_A \leq 40^\circ\text{C}$


TYPICAL PERFORMANCE CHARACTERISTICS

Load Regulation (Both Outputs Loaded)

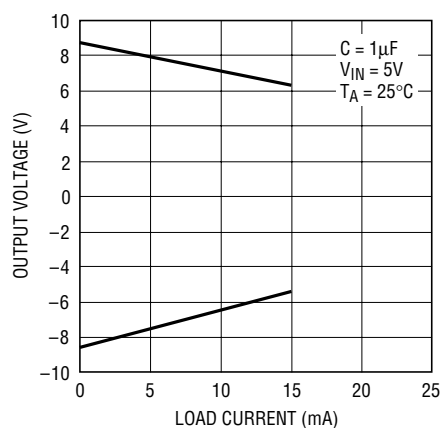


LT1026 • TPC01

Load Regulation for Positive Loading

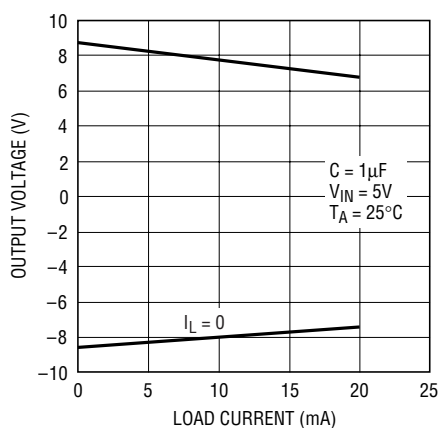


LT1026 • TPC02

Load Regulation for Negative Loading

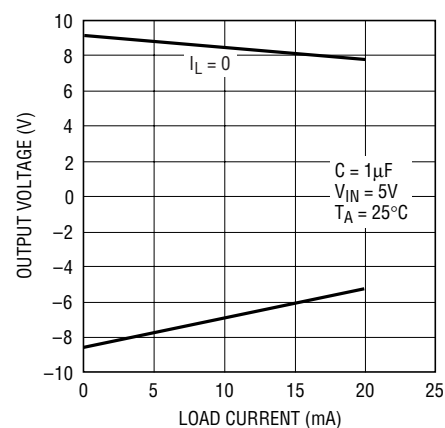


LT1026 • TPC03

Supply Current

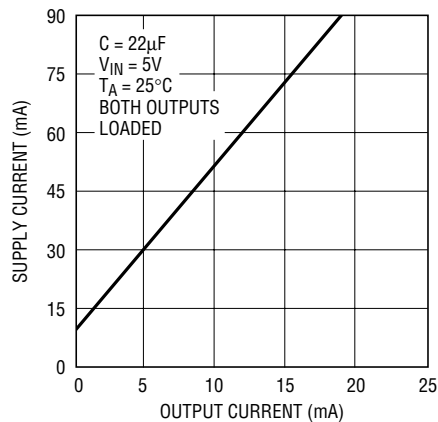


LT1026 • TPC04

Supply Current

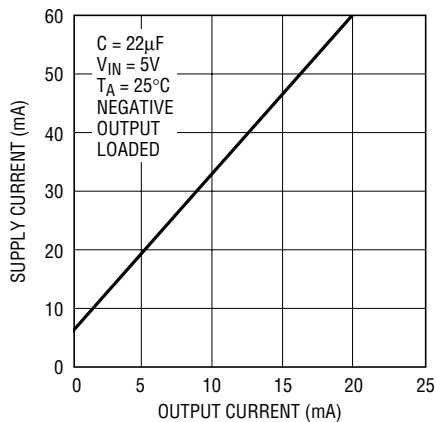


LT1026 • TPC05

Supply Current

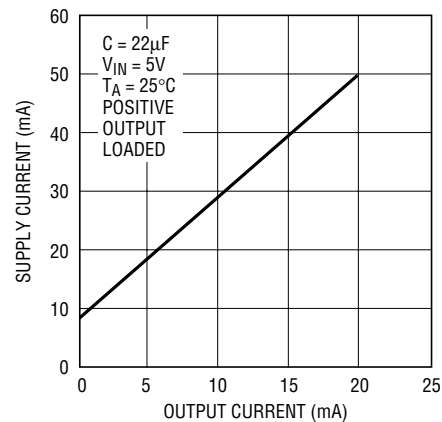


LT1026 • TPC06

TYPICAL PERFORMANCE CHARACTERISTICS

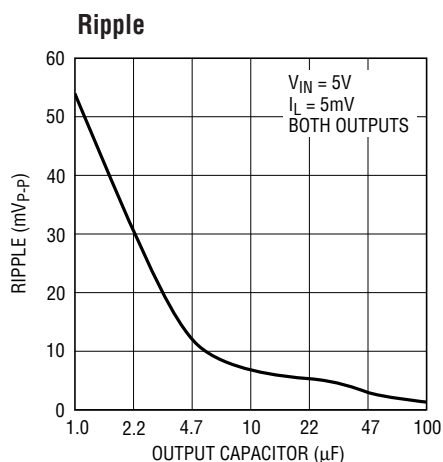

1026 • TPC07

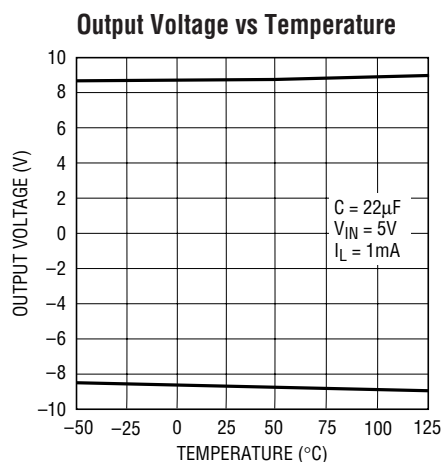

LT1026 • TPC08

APPLICATIONS INFORMATION

The LT1026 is a nonregulating voltage converter that converts a single input voltage into both a positive and negative output at up to 15mA. A positive input voltage is first doubled and then the doubled voltage is inverted. The voltage output level is dependent on both the input voltage and the output loading. The total output current available depends on the individual loading of the outputs since loading on one output affects the load and the voltage of the other.


Only four external components are needed for operation. Two charge pump capacitors and two output storage capacitors. Nominal value for these capacitors is 1μF, but the LT1026 will operate (with reduced performance) down to 0.1μF. Higher value capacitors (22μF) will reduce ripple and slightly lower output impedance. For higher output currents the outputs of several converters may be paralleled with common output capacitors.

The substrate diodes are an inherent part of the IC, and must always be reversed biased to isolate the individual transistors. In the LT1026 the substrate is tied to the negative output. If the negative output is not used, such as when only the voltage doubler output is needed, $-V_{OUT}$ must be tied to ground so the substrate diodes are properly biased. The substrate diodes must never become forward biased even during overload conditions. For example, pulling $-V_{OUT}$ positive with respect to ground can forward bias the substrate diodes. Clamping the substrate to ground with an external diode would be needed to ensure proper operation and prevent the substrate from carrying any current.


No overload protection is included on the LT1026. Neither output is damaged by momentary shorts, but during sustained shorts the resulting high current flow will overheat the IC.

TYPICAL APPLICATIONS


Positive to Negative Converter

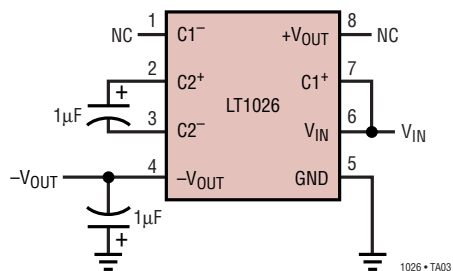


Voltage Doubler

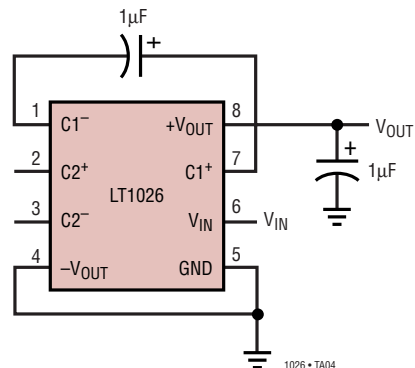


Standard Configuration Voltage Doubler and Inverter

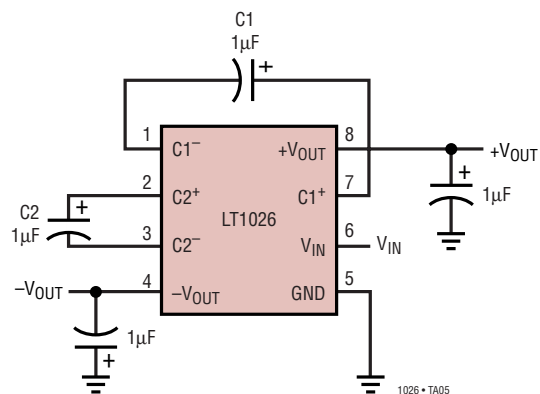

Voltage Quadrupler

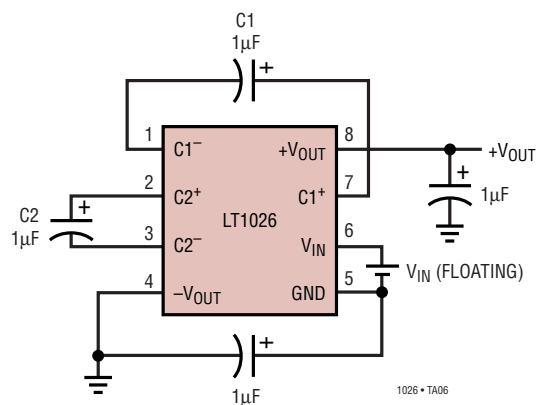


Parallel Converters for Higher Output Current and Lower Output Impedance

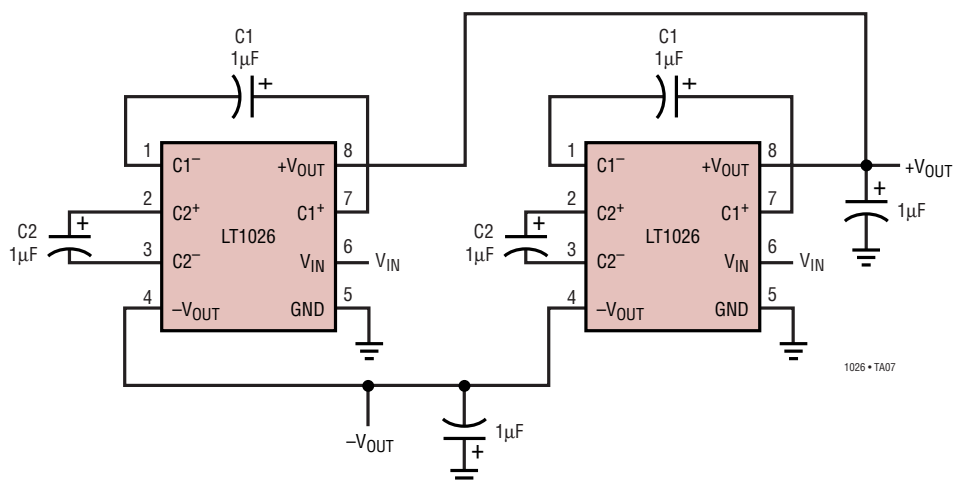

TYPICAL APPLICATIONS


5V Powered RS232 Line Driver

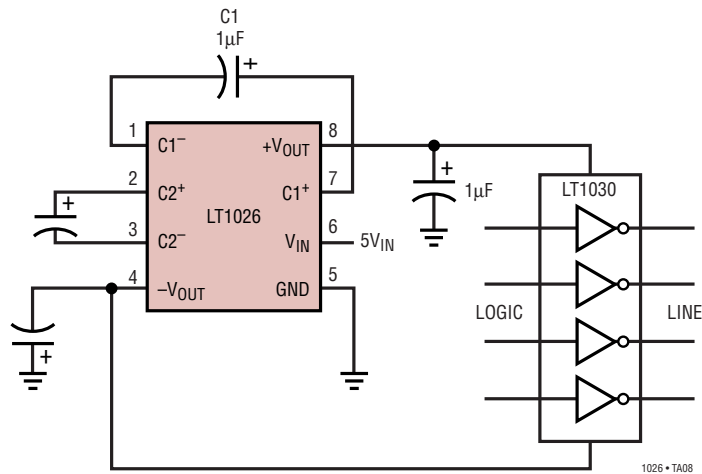

1026 • TA08

PACKAGE DESCRIPTION


H Package
8-Lead TO-5 Metal Can (.230 Inch PCD)
 (Reference LTC DWG # 05-08-1321)

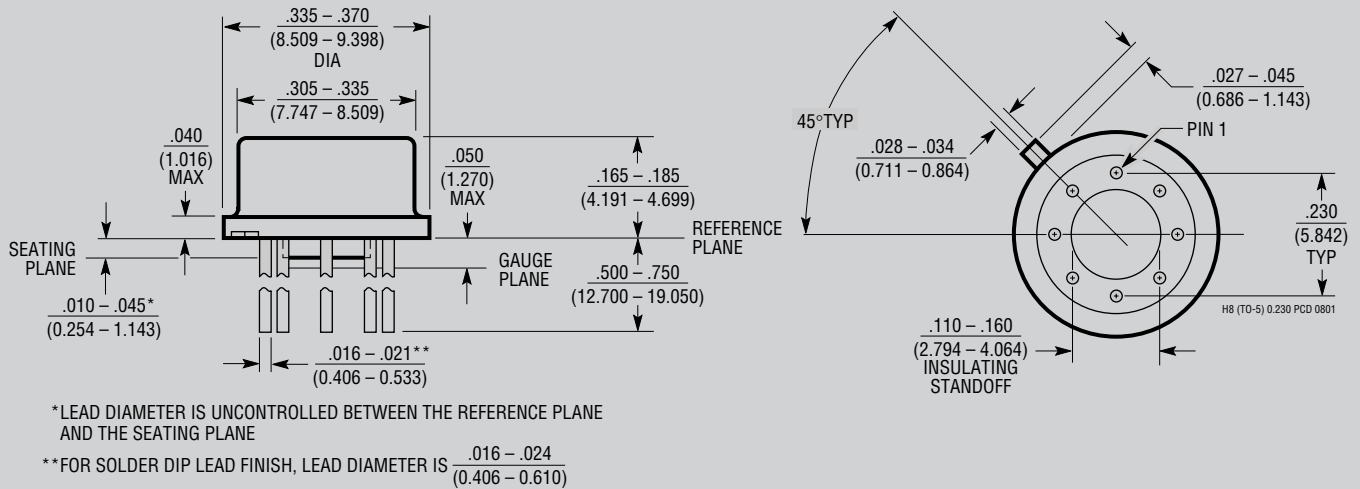

OBSOLETE PACKAGE


PACKAGE DESCRIPTION

J8 Package 8-Lead Cerdip (Narrow .300 Inch, Hermetic) (Reference LTC DWG # 05-08-1110)

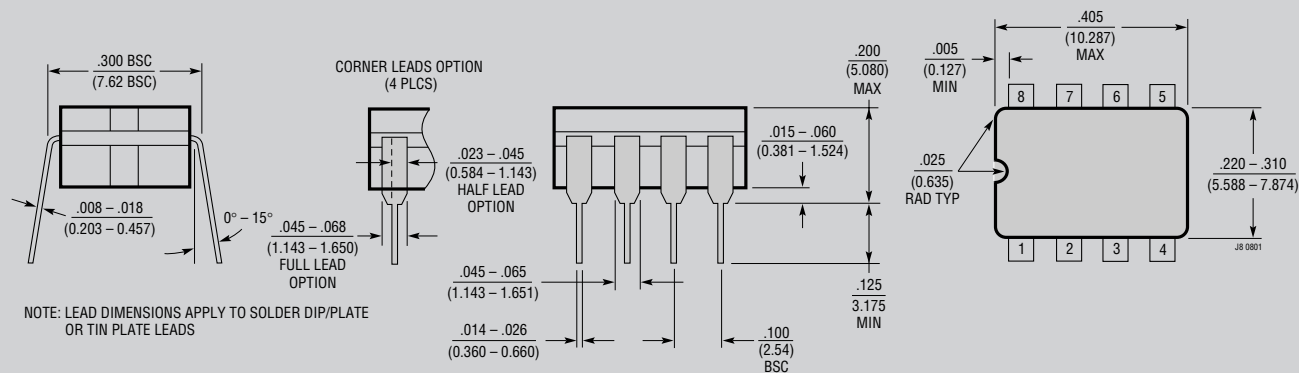


OBSOLETE PACKAGE

N8 Package 8-Lead PDIP (Narrow .300 Inch) (Reference LTC DWG # 05-08-1510)

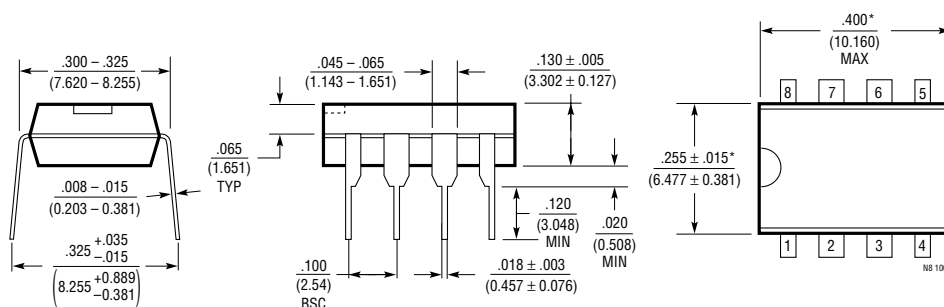

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

S8 Package 8-Lead Plastic Small Outline (Narrow 0.150) (LTC DWG # 05-08-1610)

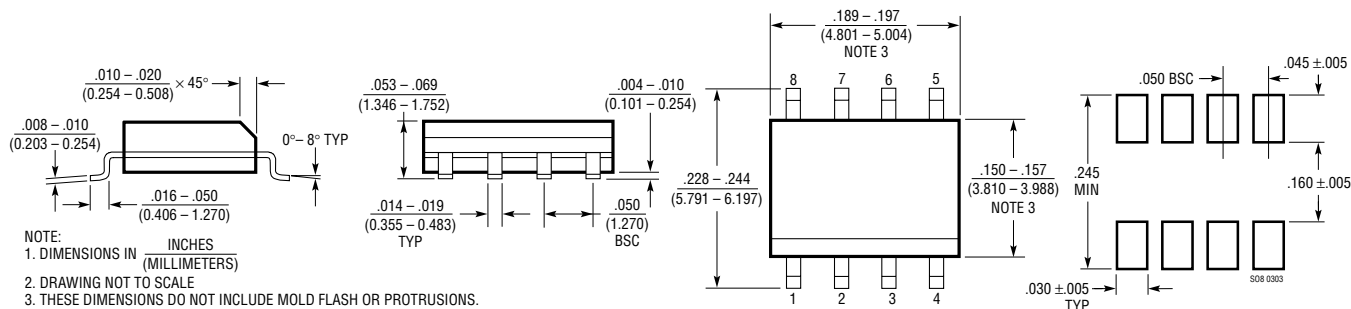

RECOMMENDED SOLDER PAD LAYOUT

1026fb

