



CONNECTORS MANUFACTURER

Pin Header 1.27mm SQ Pin=0.46mm 1 & 2 Row R/A / Straight / Stack Straight Type


Specifications

Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated


ORDER INFORMATION

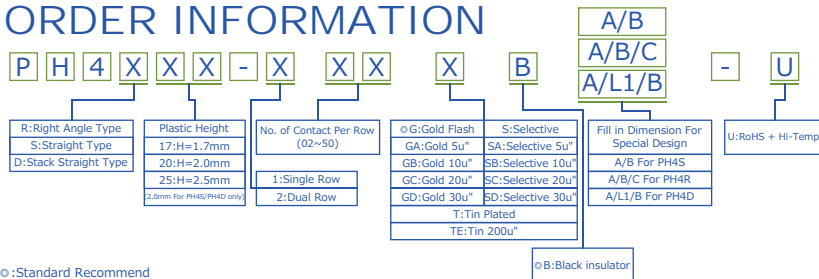


○: Standard Recommend

○B: Black insulator

Pin Header 1.27mm SQ Pin=0.46mm 1 & 2 Row H=1.7/2.5mm Right Angle Type

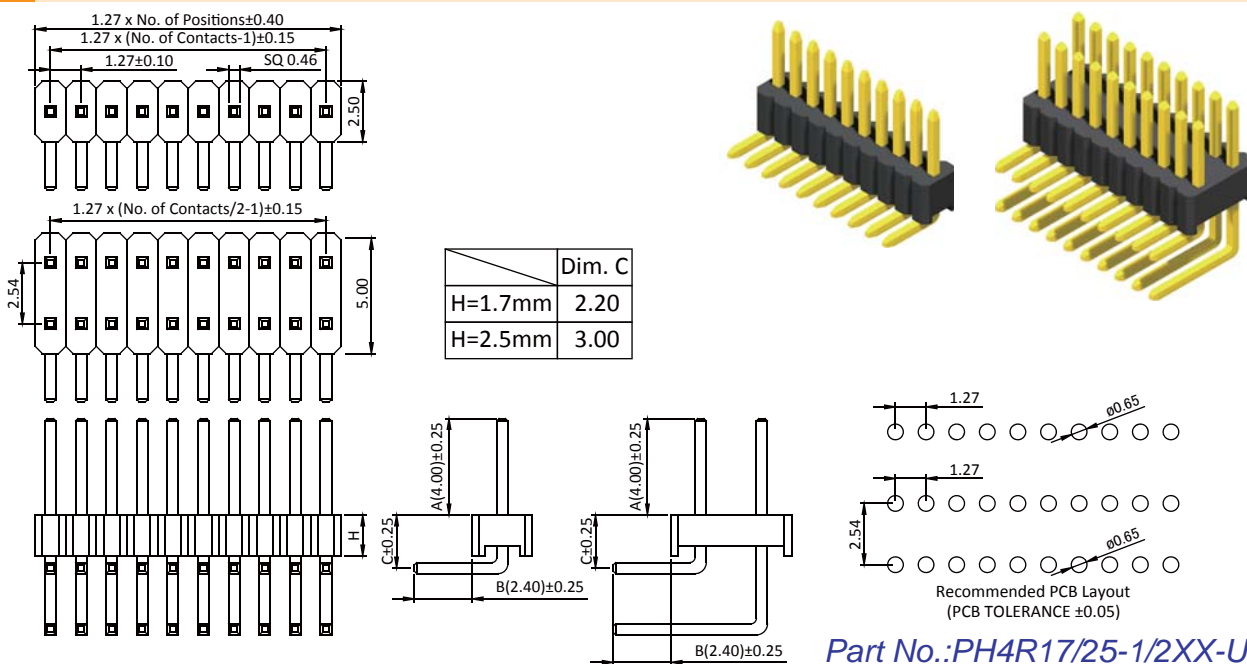

Pin Header 1.27mm SQ Pin=0.46mm 1 & 2 Row H=1.7/2.5mm Straight / Stack Straight Type

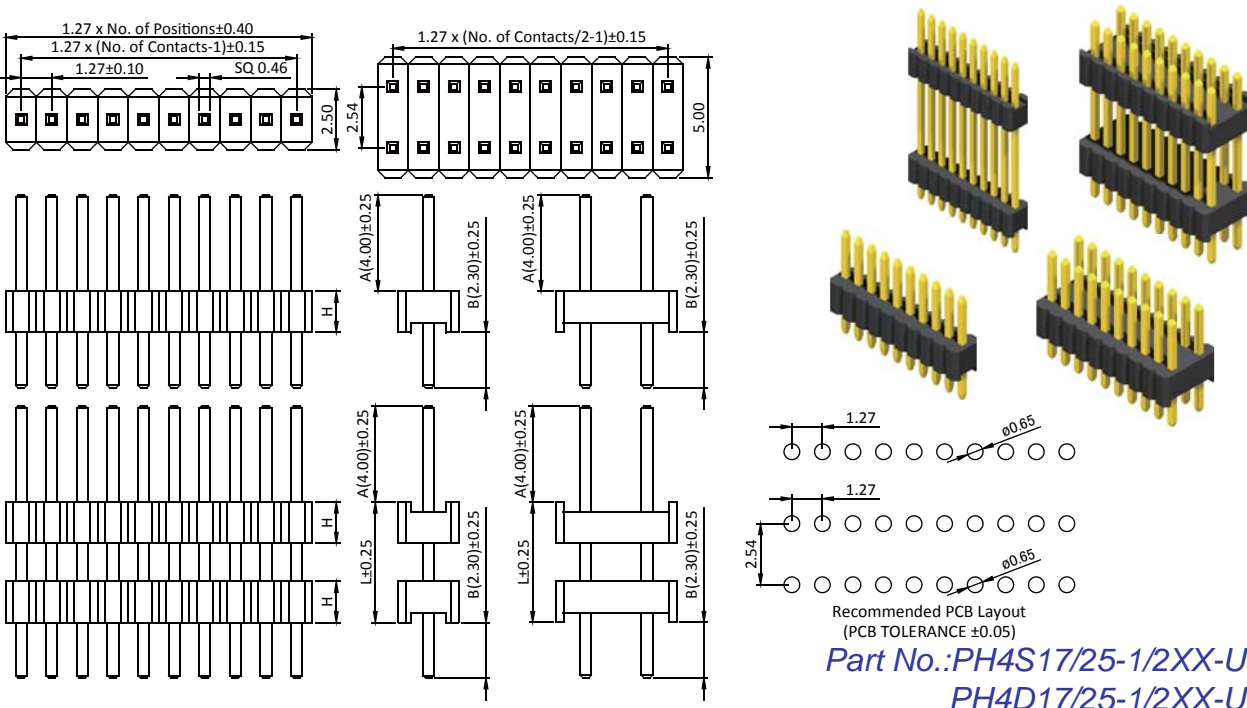

Pin Header 1.27mm



ROHS

CONNECTOR MANUFACTURER