

# I DC SOCKET




## IDC SOCKET 2.54mm

### SPECIFICATION

Current Rate: 3 AMP  
 Insulation Resistance: 1000MΩ Min  
 Contact Resistance: 30mΩ Max  
 Dielectric voltage: 1000V AC for one minute  
 Operation Temperature: -55 °C to + 105°C


### MATERIAL

Insulator: Polyester, UL 94V-0  
 ◎ Standard: P.B.T  
 Contact Pin: Brass

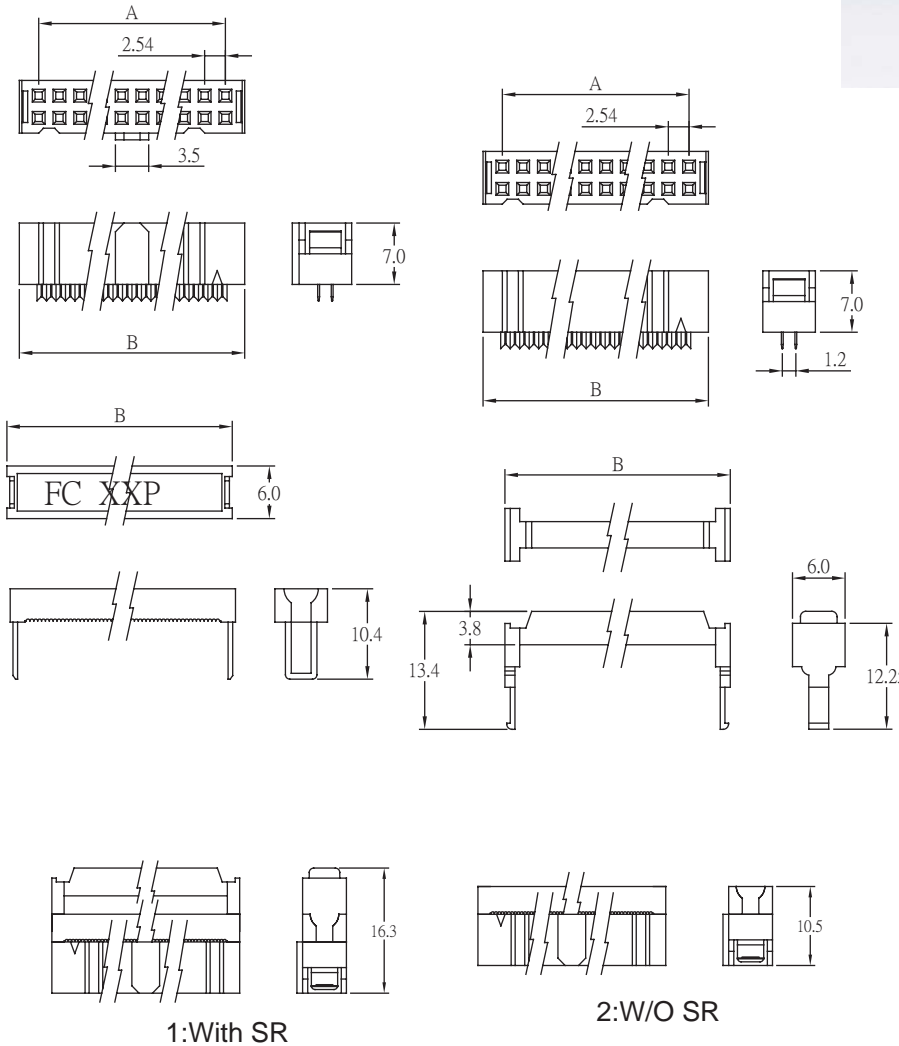

◎ Mate flat cable 1.27 mm


Position	A±0.05	B±0.1
6P	5.08	12.16
8P	7.62	14.74
10P	10.16	17.20
12P	12.70	19.80
14P	15.24	22.50
16P	17.78	24.94
20P	22.86	30.08
24P	27.94	35.15
26P	30.48	37.58
30P	35.56	42.66
34P	40.64	47.80
40P	48.26	55.42
44P	53.34	60.56
50P	60.96	68.28
56P	68.58	75.74
60P	73.66	80.96
62P	76.20	83.32
64P	78.74	85.94



1: With SR

2: W/O SR

## ORDER INFORMATION

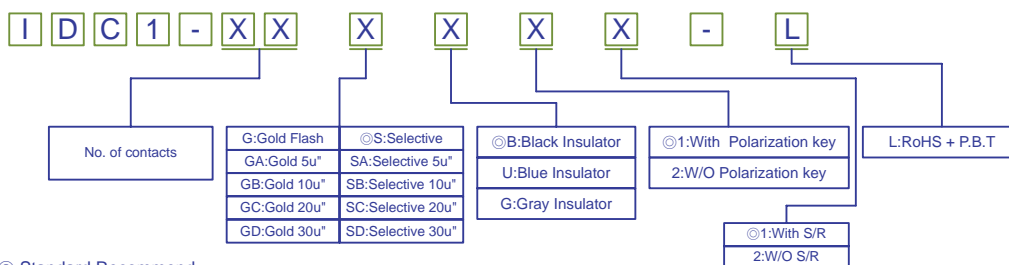

◎: Standard Recommend

RoHS Compliant