



CONNECTORS MANUFACTURE

**PIN HEADER 1.27mm SQ PIN=0.4mm
H=1.0/1.5/2.5mm STRAIGHT TYPE**

SPECIFICATION



Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min
 Contact Resistance:20mΩ Max
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-40 °C to + 105°C

MATERIAL



Insulator:Polyester,UL 94V-0
 ◎ Standard:Nylon 6T
 Contact Pin:Brass
 Finish:Tin, Gold Plated
 ◎Standard:Gold Flash all over



PIN HEADER 1.27mm




Recommended PCB Layout
(PCB TOLERANCE ±0.05)

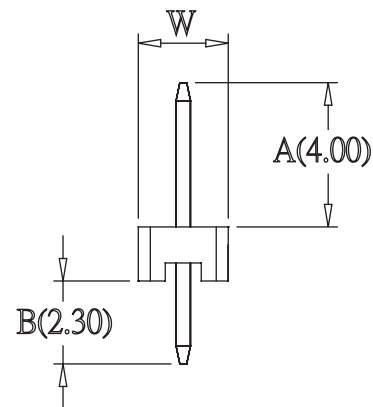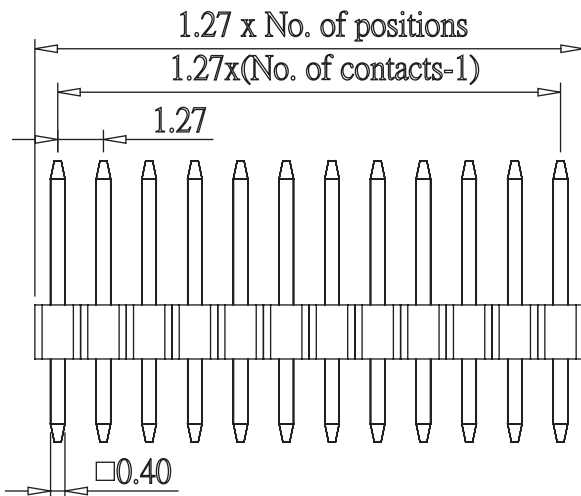

	W
H=1.0	2.1
H=1.5	2.1
H=2.5	2.5



ORDER INFORMATION

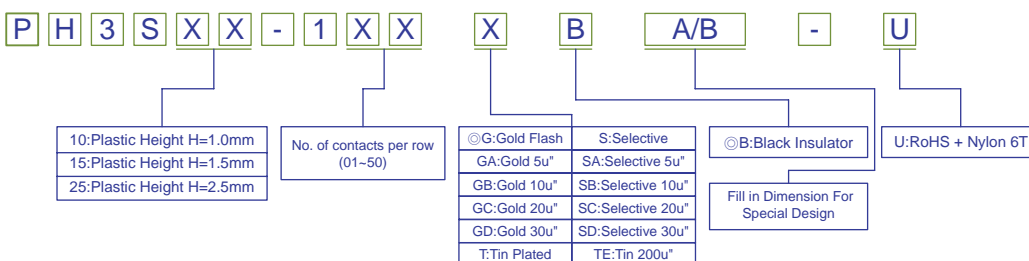

©:Standard Recommend

AMTEK CONNECTOR MANUFACTURE