



CONNECTORS MANUFACTURE





FEMALE HEADER 1.27mm H=3.4/4.4mm STRAIGHT TYPE

SPECIFICATION

Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min
 Contact Resistance:20mΩ Max
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-40 °C to + 105°C


MATERIAL

Insulator:Polyester,UL 94V-0
 ◎ Standard:Nylon 6T
 Contact Pin:Phospor Bronze
 Finish:Tin, Gold Plated
 ◎Standard:Gold Flash all over

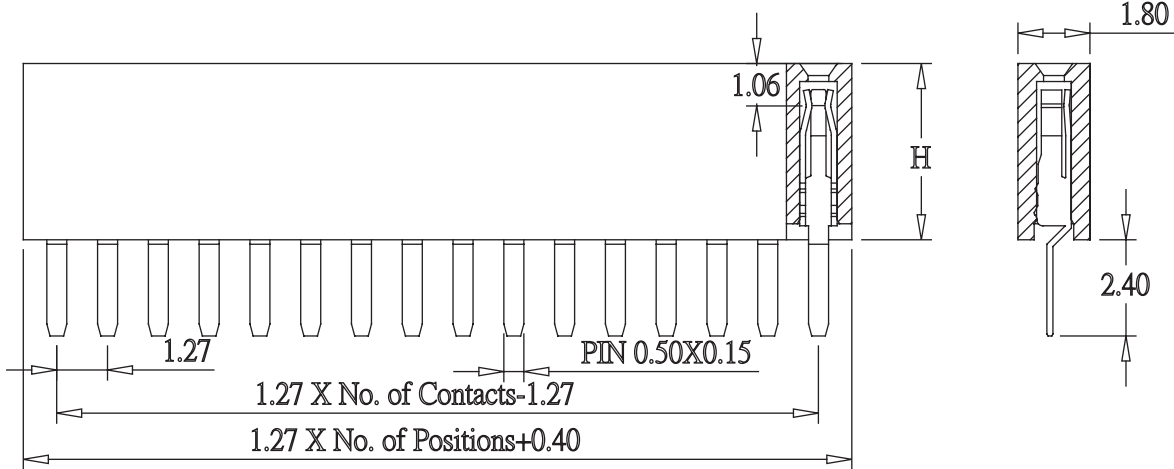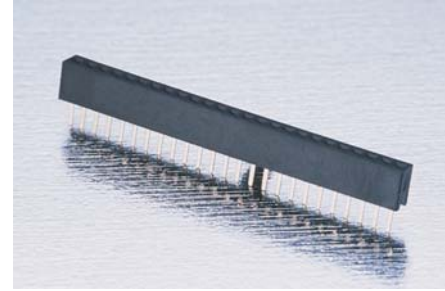

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

ORDER INFORMATION

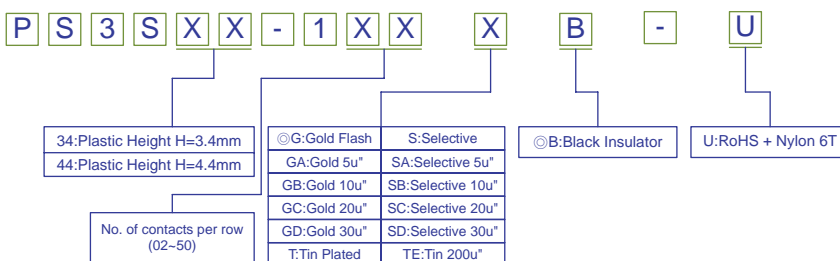

©:Standard Recommend

