

## SMALL SIGNAL SCHOTTKY DIODE


### FEATURES AND BENEFITS

- VERY SMALL CONDUCTION LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- LOW FORWARD VOLTAGE DROP
- EXTREMELY FAST SWITCHING
- SURFACE MOUNTED DEVICE

### DESCRIPTION

Schottky barrier diode encapsulated in a SOD-323 small SMD package.

This device is intended for use in portable equipments. It is suited for DC to DC converters, step-up conversion and power management.

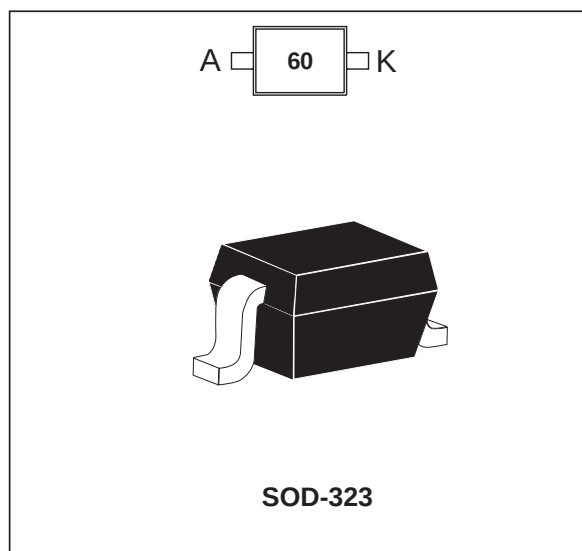

### ABSOLUTE RATINGS (limiting values)

| Symbol    | Parameter                                    |                   | Value        | Unit        |
|-----------|----------------------------------------------|-------------------|--------------|-------------|
| $V_{RRM}$ | Repetitive peak reverse voltage              |                   | 10           | V           |
| $I_F$     | Peak forward current                         | $\delta = 0.11$   | 3            | A           |
| $I_{FSM}$ | Surge non repetitive forward current         | $t_p=10ms$        | 5            | A           |
| $P_{tot}$ | Power Dissipation                            | $T_a=25^{\circ}C$ | 310          | mW          |
| $T_{stg}$ | Storage temperature range                    |                   | - 65 to +150 | $^{\circ}C$ |
| $T_j$     | Maximum operating junction temperature *     |                   | 150          | $^{\circ}C$ |
| TL        | Maximum temperature for soldering during 10s |                   | 260          | $^{\circ}C$ |

\* :  $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th}(j-a)}$  thermal runaway condition for a diode on its own heatsink

### THERMAL RESISTANCE

| Symbol        | Parameter               | Value | Unit          |
|---------------|-------------------------|-------|---------------|
| $R_{th(j-a)}$ | Junction to ambient (*) | 400   | $^{\circ}C/W$ |

(\*) Mounted on epoxy board with recommended pad layout.

## BAT60J

### STATIC ELECTRICAL CHARACTERISTICS

| Symbol     | Tests Conditions        | Tests conditions         |                       | Min. | Typ. | Max. | Unit          |
|------------|-------------------------|--------------------------|-----------------------|------|------|------|---------------|
| $V_F^*$    | Forward voltage drop    | $T_j = 25^\circ\text{C}$ | $I_F = 10\text{ mA}$  |      | 0.28 | 0.32 | V             |
|            |                         |                          | $I_F = 100\text{ mA}$ |      | 0.35 | 0.40 |               |
|            |                         |                          | $I_F = 1\text{ A}$    |      | 0.53 | 0.58 |               |
| $I_R^{**}$ | Reverse leakage current | $T_j = 25^\circ\text{C}$ | $V_R = 5\text{ V}$    |      | 1    | 3    | $\mu\text{A}$ |
|            |                         | $T_j = 25^\circ\text{C}$ | $V_R = 8\text{ V}$    |      | 1.3  | 4    |               |
|            |                         | $T_j = 25^\circ\text{C}$ | $V_R = 10\text{ V}$   |      | 2    | 6    |               |
|            |                         | $T_j = 25^\circ\text{C}$ | $V_R = 12\text{ V}$   |      | 2.5  | 7.5  |               |
|            |                         | $T_j = 80^\circ\text{C}$ | $V_R = 8\text{ V}$    |      | 73   | 150  |               |


Pulse test: \*  $t_p = 380\mu\text{s}$ ,  $\delta < 2\%$

\*\*  $t_p = 5\text{ms}$ ,  $\delta < 2\%$


To evaluate the conduction losses the following equation:

$$P = 0.38 \times I_{F(AV)} + 0.17 I_{F(RMS)}^2$$


**Fig. 1:** Average forward power dissipation versus average forward current.

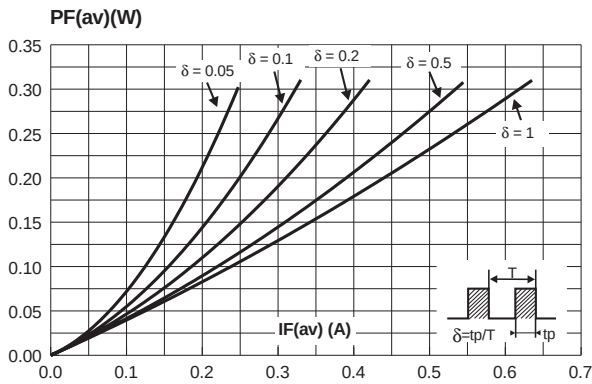


**Fig. 2-1:** Peak forward current versus ambient temperature ( $\delta = 0.11$ ).

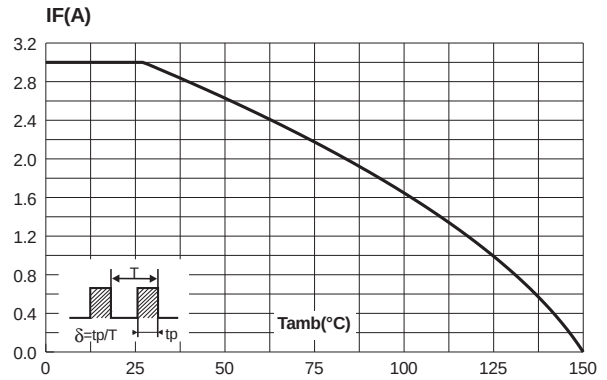


**Fig. 2-2:** Average forward current versus ambient temperature ( $\delta = 0.5$ ).

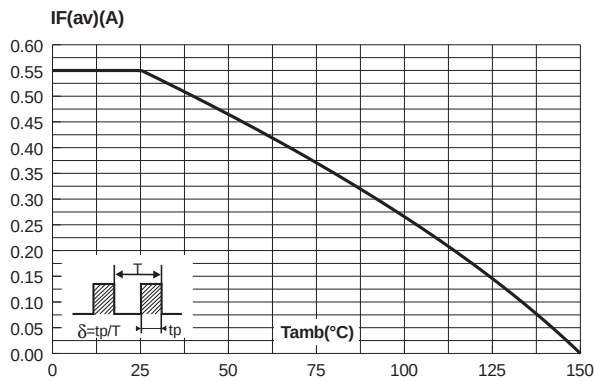


**Fig. 3:** Non repetitive surge peak forward current versus overload duration (maximum values).

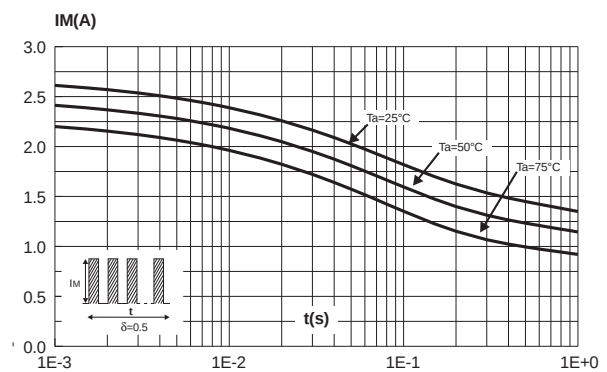

**Fig. 4:** Relative variation of thermal impedance junction to ambient versus pulse duration (Epoxy printed circuit board FR4 with recommended pad layout).

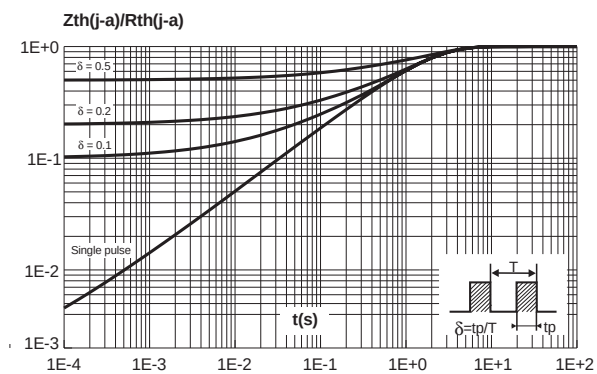


**Fig. 5:** Reverse leakage current versus reverse voltage applied (typical values).

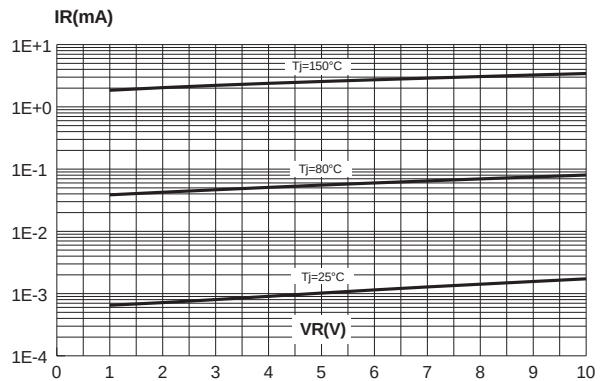


# BAT60J


**Fig. 6:** Reverse leakage current versus junction temperature (typical values).

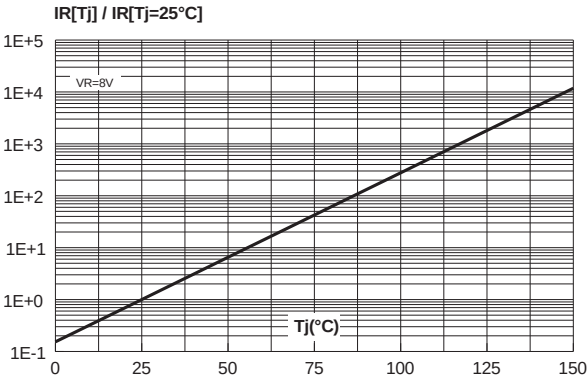


**Fig. 7:** Junction capacitance versus reverse voltage applied (typical values).

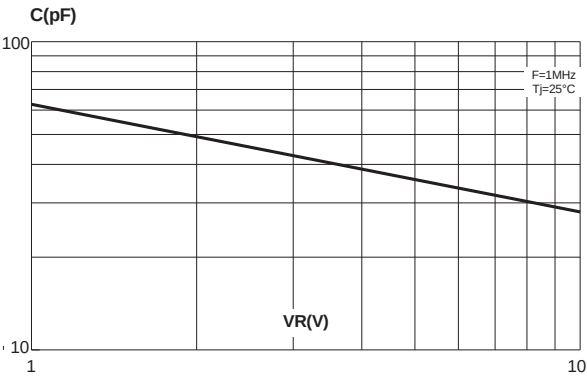


**Fig. 8-1:** Forward voltage drop versus forward current (High level).

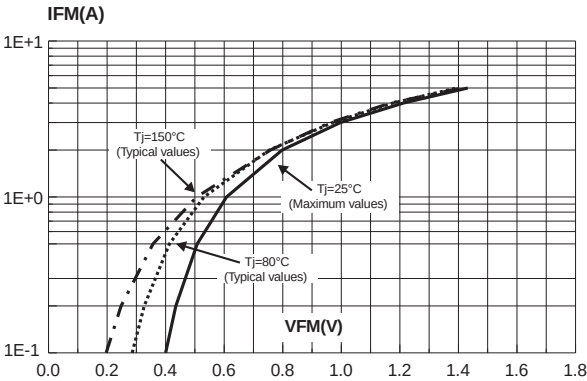

**Fig. 8-2:** Forward voltage drop versus forward current (Low level).

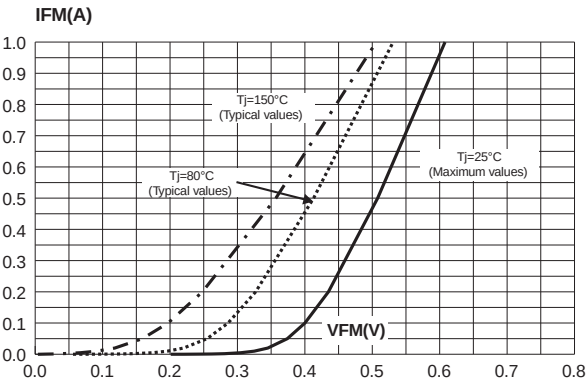

**Fig. 9:** Thermal resistance junction to ambient versus copper surface (epoxy printed circuit board FR4, copper thickness: 35μm).

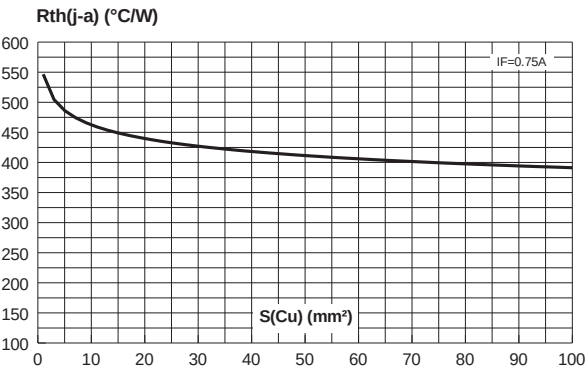

**PACKAGE MECHANICAL DATA**  
**SOD-323**

| REF. | DIMENSIONS  |      |        |       |
|------|-------------|------|--------|-------|
|      | Millimeters |      | Inches |       |
|      | Min.        | Max. | Min.   | Max.  |
| A    |             | 1.17 |        | 0.046 |
| A1   | 0           | 0.1  | 0      | 0.004 |
| b    | 0.25        | 0.44 | 0.01   | 0.017 |
| c    | 0.1         | 0.25 | 0.004  | 0.01  |
| D    | 1.52        | 1.8  | 0.06   | 0.071 |
| E    | 1.11        | 1.45 | 0.044  | 0.057 |
| H    | 2.3         | 2.7  | 0.09   | 0.106 |
| L    | 0.1         | 0.46 | 0.004  | 0.02  |
| Q1   | 0.1         | 0.41 | 0.004  | 0.016 |

**MARKING**

| Type       | Marking | Package | Weight   | Base qty | Delivery mode |
|------------|---------|---------|----------|----------|---------------|
| BAT60JFILM | 60      | SOD-323 | 0.005 g. | 3000     | Tape & reel   |

- Epoxy meets UL94V-0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany  
 Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore  
 Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>