



# PRODUCT DATASHEET

## High Bay series

last update 17/12/2015


### DETAILS

<b>Product Number</b>	CS14895_HB-IP-2X6-RS
<b>Family</b>	High Bay
<b>Type</b>	Assembly
<b>Color</b>	clear
<b>Diameter</b>	173 + 71,4 mm
<b>Height</b>	11,39 mm
<b>Style</b>	rectang
<b>Optic Material</b>	PMMA
<b>Holder Material</b>	
<b>Fastening</b>	screw, pin
<b>Status</b>	ready
<b>ROHS Compliant</b>	Yes
<b>Date Updated</b>	17/12/2015




### OPTICAL PROPERTIES


LED	Viewing	Light	Effi-		
	Angle	Beam	ciency	cd/lm	Connector
Oslon Square Gen3	sim: 12	Real spot	sim: 90 %	sim: 14.000-	
XP-G2	13 deg	Real spot	94 %	10.600	-
XM-L	21 deg	Real spot	94 %	5.100	-

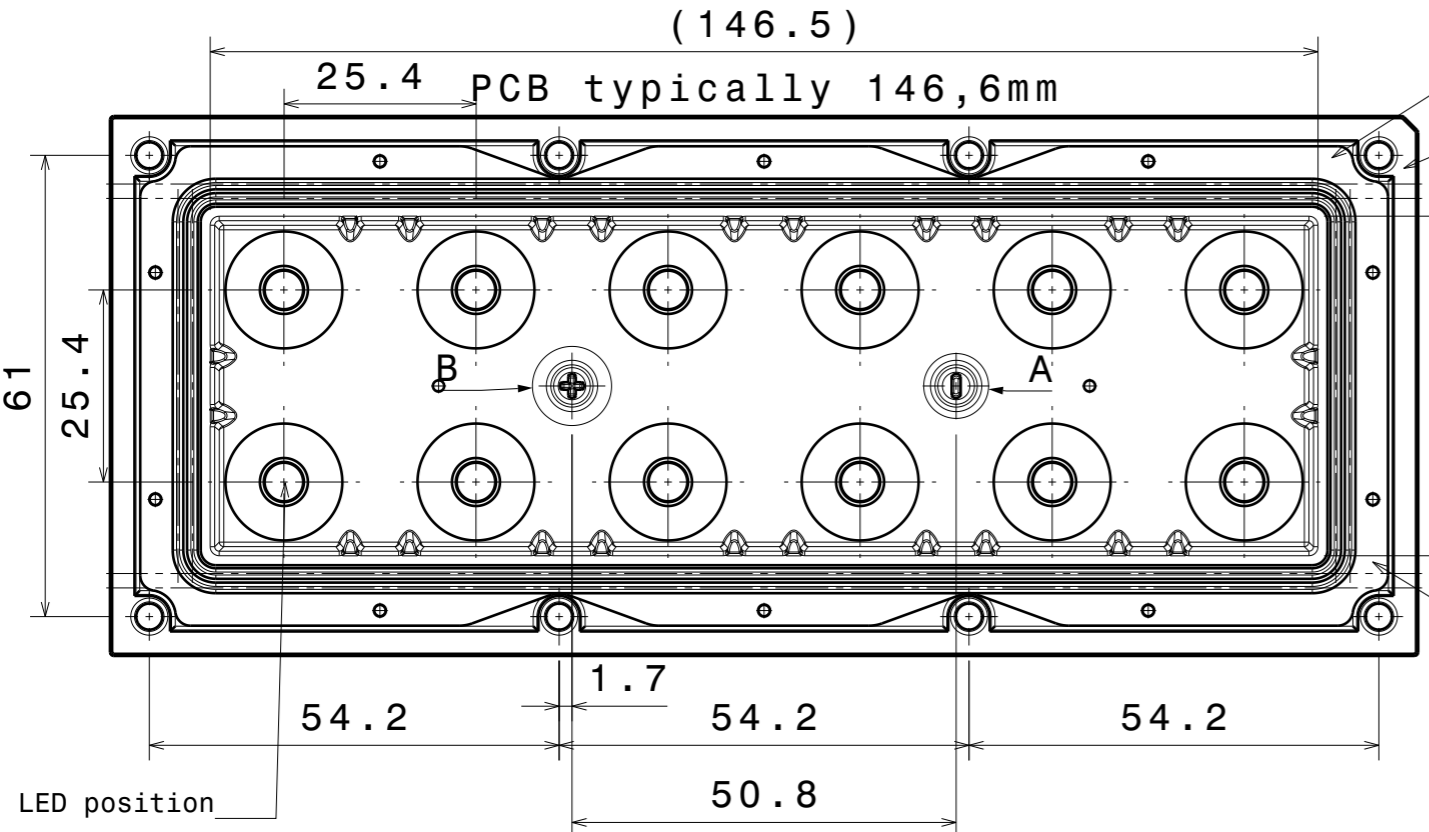


Wiring:  
 PCB is fully sealed between the lens with silicone seal and the heatsink. Wiring needs to be done through the PCB and heatsink to maintain high IP rating.




Detail A  
Scale 2:1




Detail B  
Scale 2:1

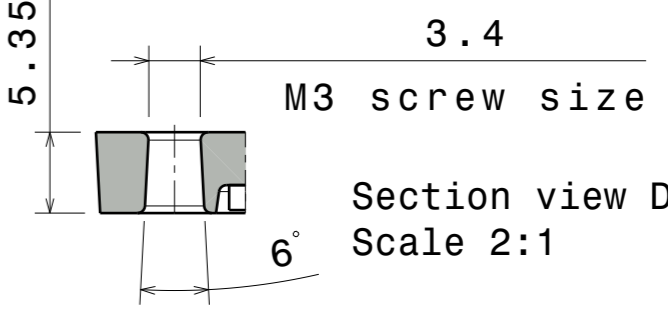

Section view D-D  
Scale 2:1

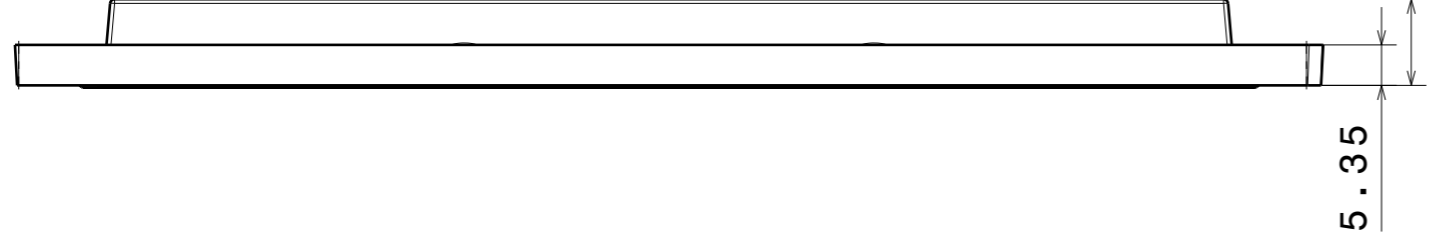


Silicone seal is tested to work in LEDiL test assemblies. Customer is recommended to test the sealing in the end product due many variables, such as heat sink surface and possible chemical traces

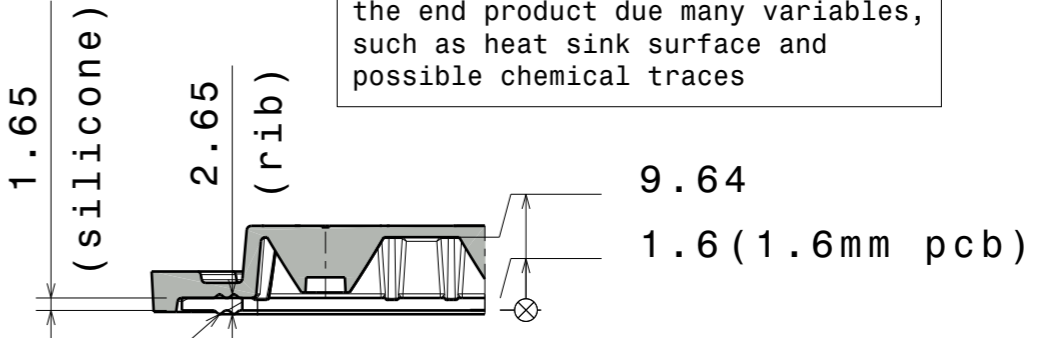

Section view C-C  
Scale 1:1

Fasten middle screws first. Recommended torque with pan head screw: 0.57Nm (for 1.6mm thick PCB, no thermal pad)

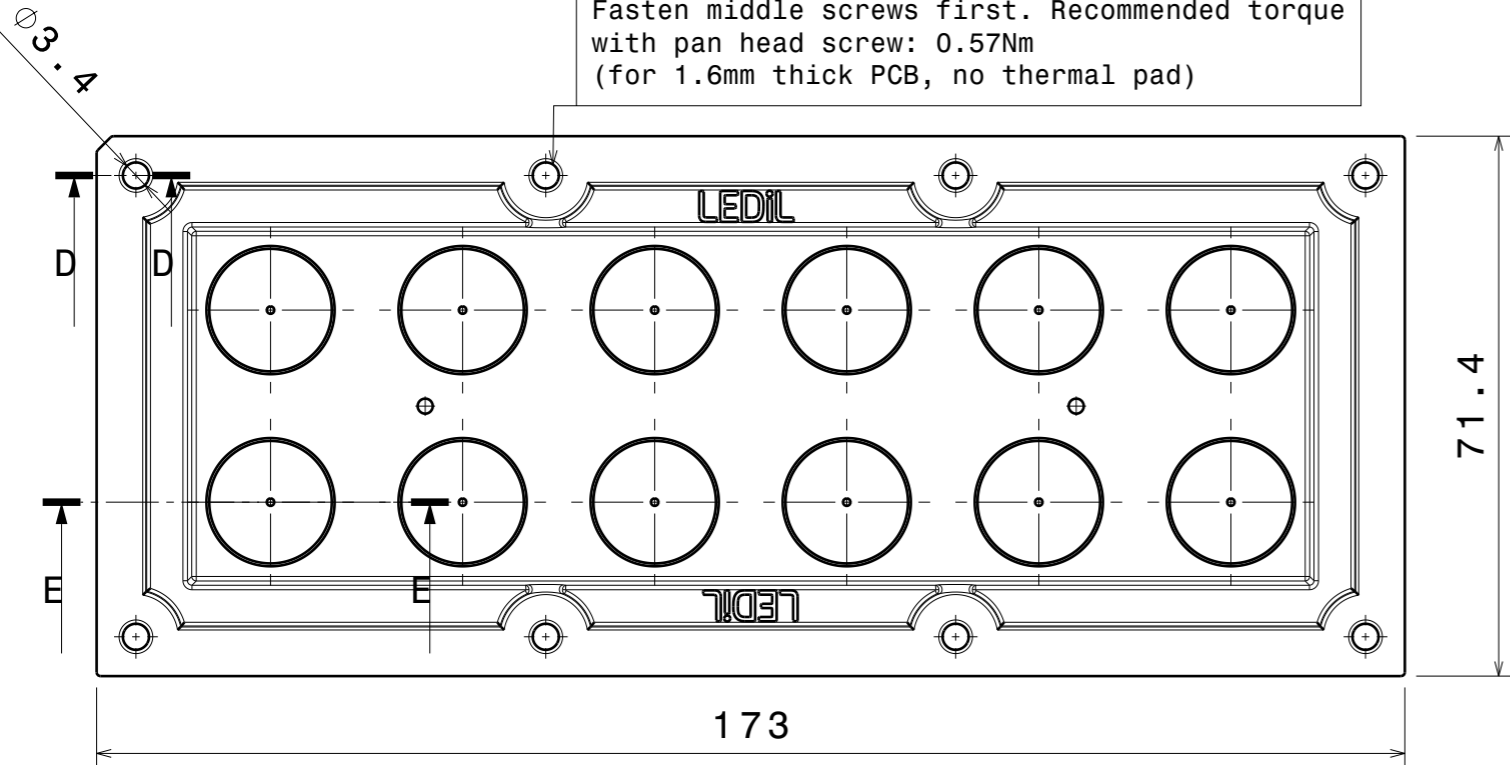

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C14018	2X6-SEAL25	Silicone	
2	C14887	HB-IP-2X6-RS	PMMA	clear

Tolerances if not otherwise shown  
 According to DIN ISO 2768-1  
 Linear measures:  
 up to 30mm class M, otherwise class C  
 According to DIN ISO 2768-2  
 Form and position: class L

**LEDiL** Ledil Oy  
 Salorankatu 10  
 FIN 24240 SALO  
 Finland

THIRD ANGLE PROJECTION:


DRAWING TITLE  
**CS14895\_HB-IP-2X6\_Mechanical model**

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

SIZE PART NUMBER  
**A3 CS14895**


SCALE 1:1 WEIGHT 58,8 g SHEET 1/1

Luminaire: LEDiL Oy CS14895\_HB-IP-2X6-RS  
Lamps: 1 x Cree\_XP-G2\_1235.27lm@250mA\_P=8.6001W\_I=0.25A

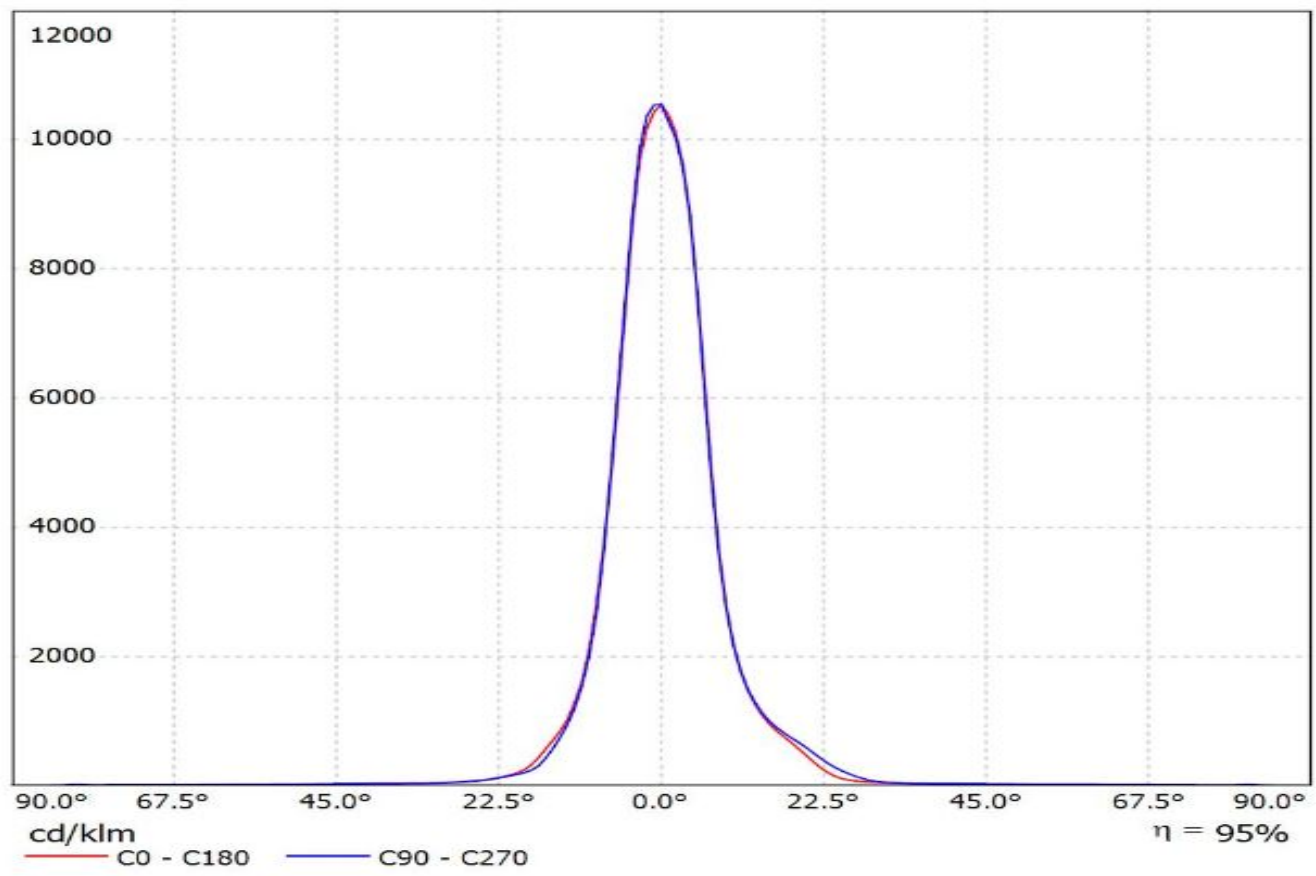


Luminaire: LEDiL Oy CS14895\_HB-IP-2X6-RS\_(XM-L)

Lamps: 1 x Cree\_XM-L\_(XMLAWT-00-0000-000LT20E7)\_980.828lm@250mA\_P=8.1232W\_I=0.250A

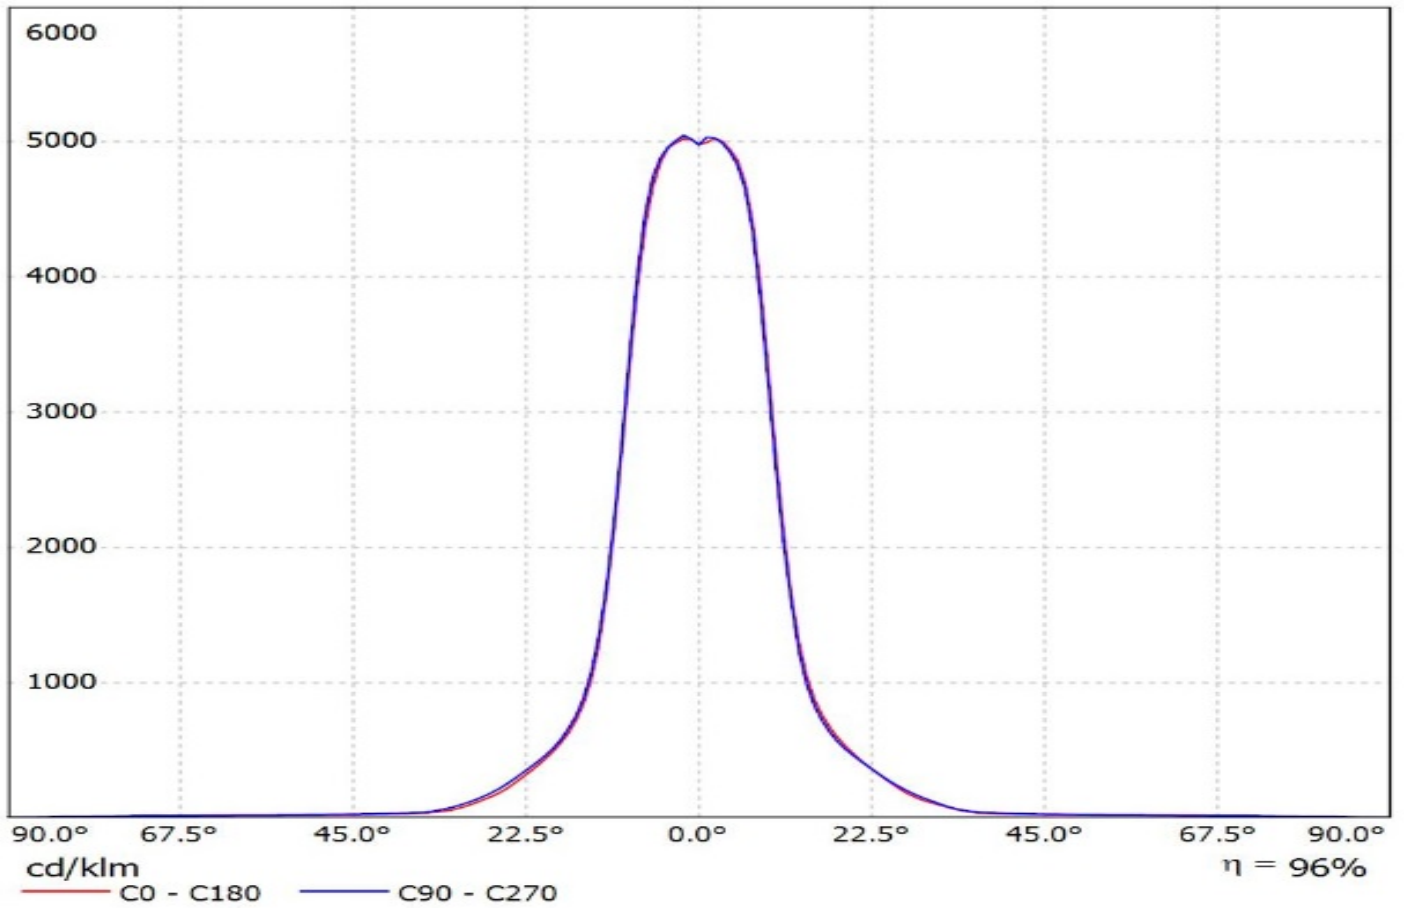

Luminaire: LEDiL Oy CS14895\_HB-IP-2X6-RS

Lamps: 1 x Cree\_XP-G2\_1235.27lm@250mA\_P=8.6001W\_I=0.25A

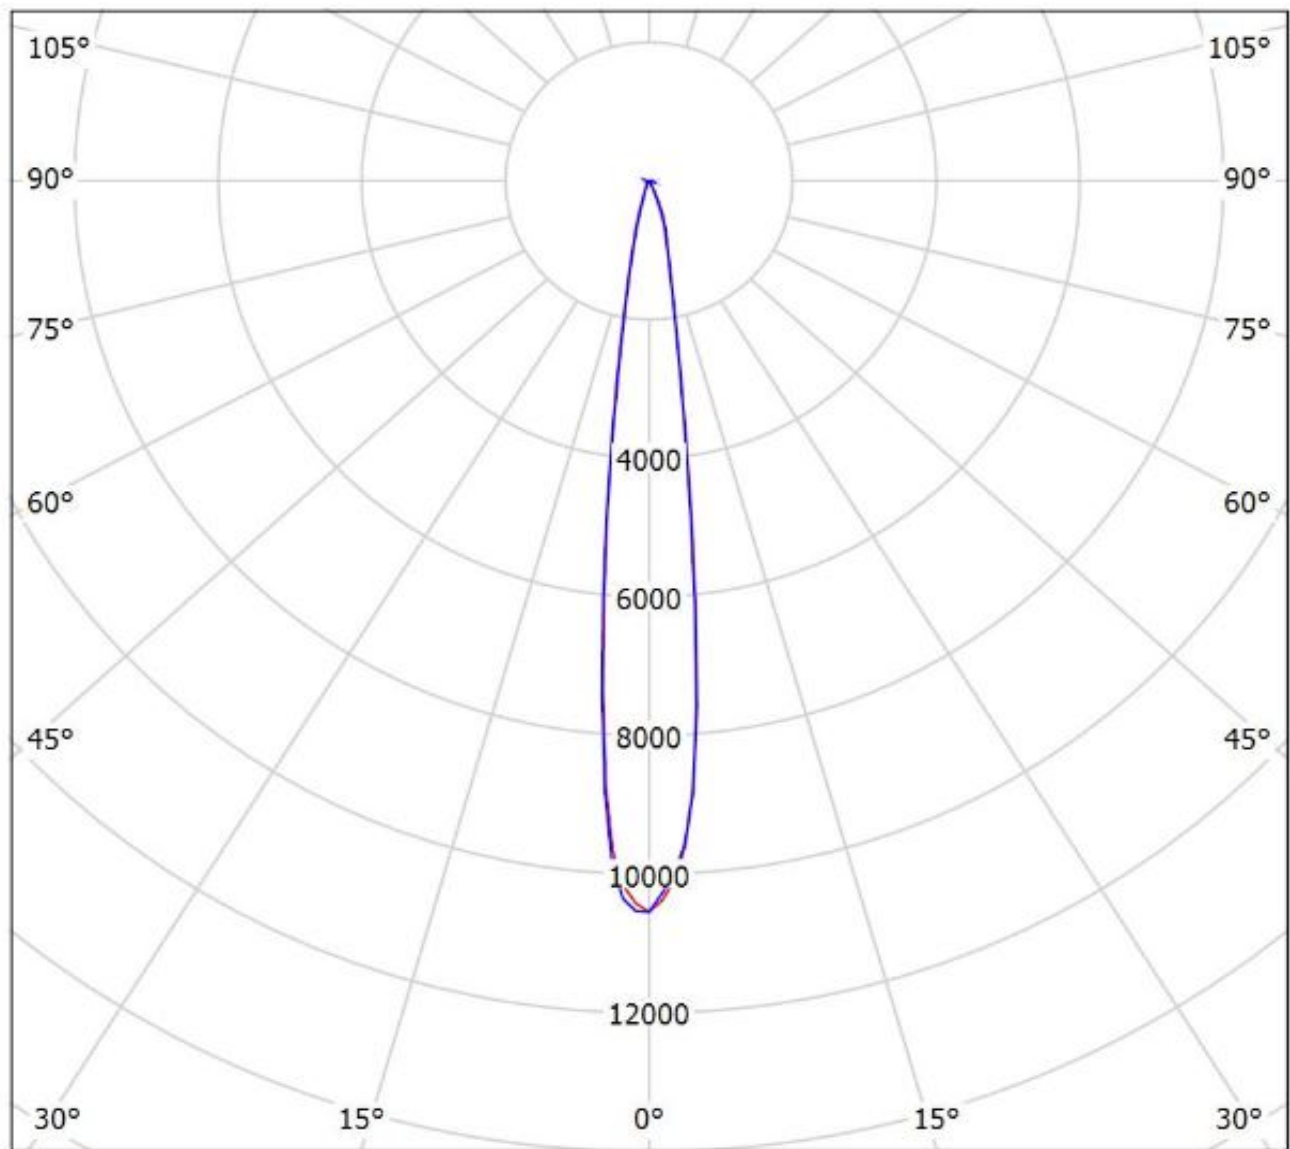


cd/klm

— C0 - C180 — C90 - C270

$\eta = 95\%$

Luminaire: LEDiL Oy CS14895\_HB-IP-2X6-RS\_(XM-L)

Lamps: 1 x Cree\_XM-L\_(XMLAWT-00-0000-000LT20E7)\_980.828lm@250mA\_P=8.1232W\_I=0.250A

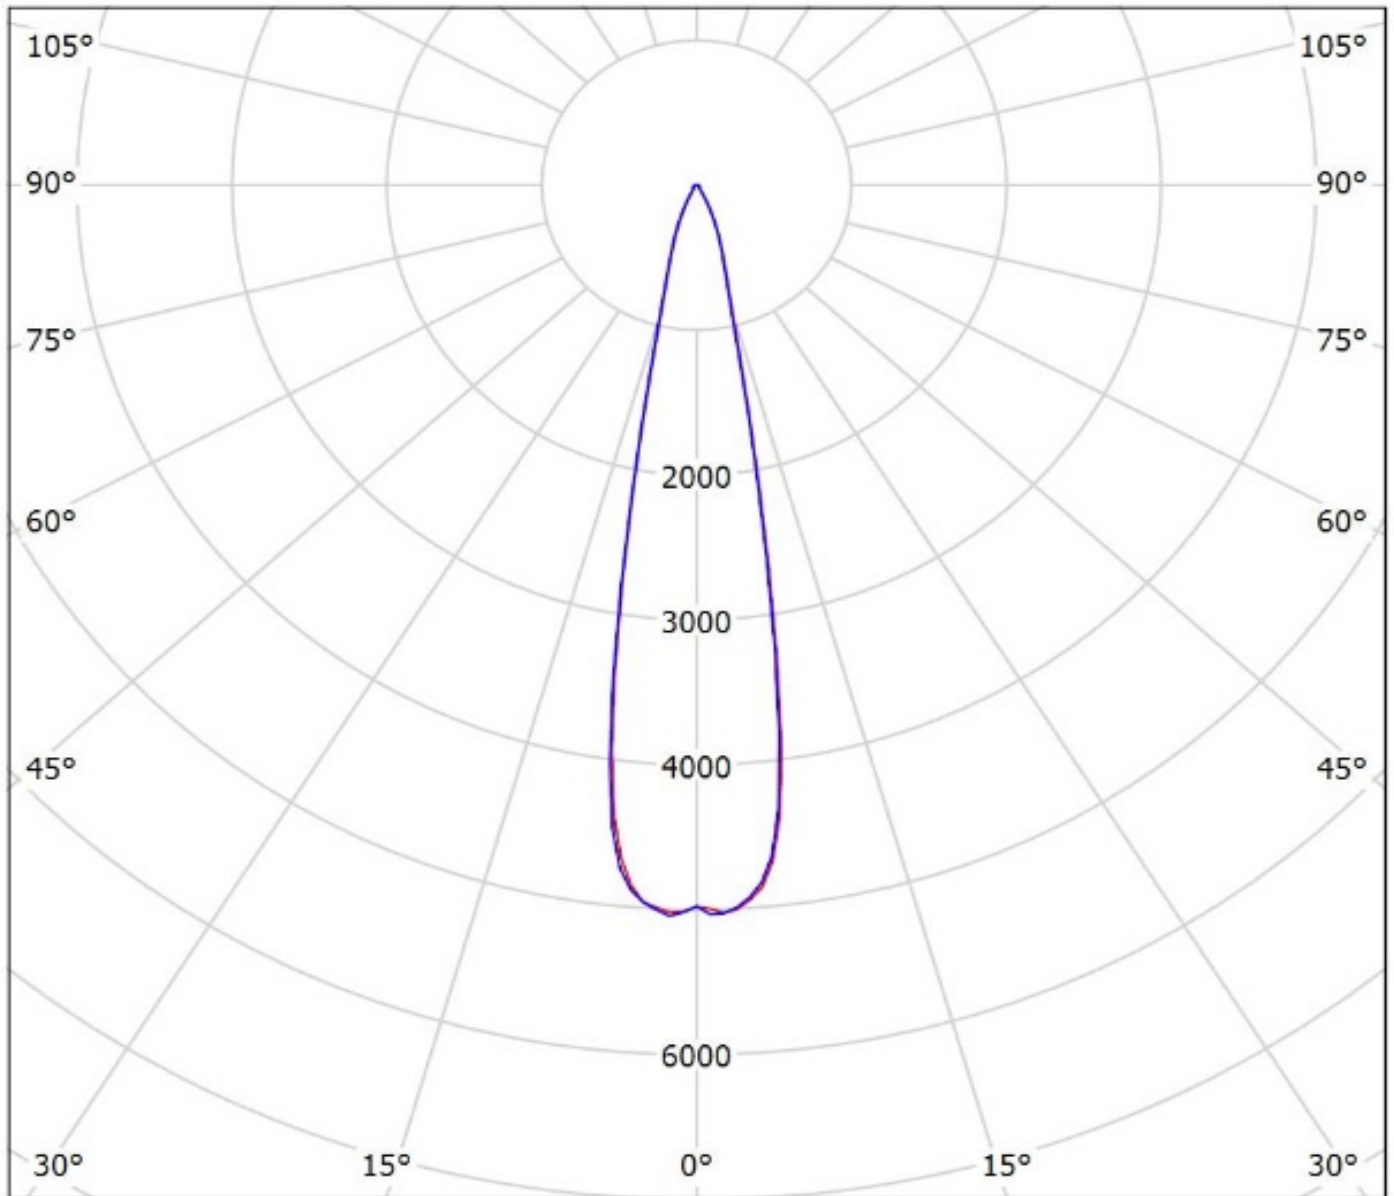

cd/klm

— C0 - C180 — C90 - C270

$\eta = 96\%$

**NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.**