



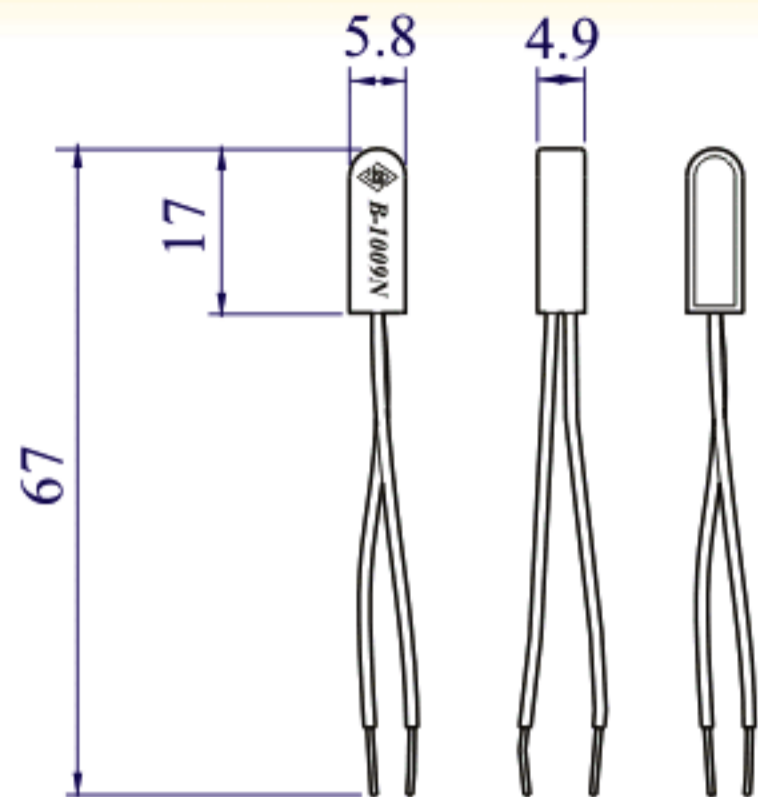

SANG MAO

SERIES B-1009N (1992N)

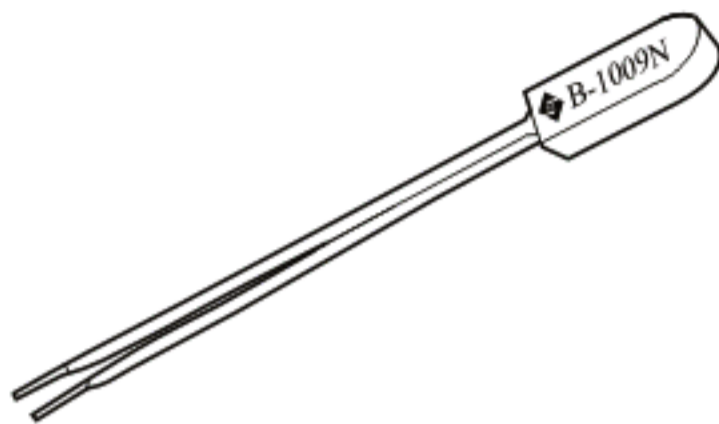

DIMENSION IN mm

SPECIFICATIONS:

- * TEMPERATURE RANGE: **45 - 140°C**
- * OPERATING TOLERANCE: **±5°C**
- * RESET DIFFERENTIAL: **10°C - 50°C**
- * INPUT POWER: **12/24 VDC / 125/250 VAC**
- * CONTACTS TYPE: NORMALLY CLOSE(NNC) / NORMALLY OPEN(NNO) .
- * CONTACTS ENDURANCE: (RESISTIVE LOAD)
 - 24VDC × 100mA** -- 50,000 CYCLES
 - 24VDC × 4A** -- 10,000 CYCLES
 - 125VAC × 4A** -- 10,000 CYCLES
 - 250VAC × 2A** -- 10,000 CYCLES
- * INTERRUPT CAPACITY: **125VAC × 20A** -- **5** CYCLES .
- * OVERSHOOT TEMPERATURE: **180°C / 3 MINUTES** .
- * DIELECTRIC STRENGTH: **1500VAC / 1 MINUTE** .
- * LEAD WIRE: AWG # **22 × 50** mm
- * HOUSING MATERIAL: POLYAMIDE
- * FEATURES: WATERPROOF
SMALL SIZE
SHORT CURRENT FAST ACTION
- * METHOD OF OPERATION : **AUTOMATIC INTERRUPTION AND AUTOMATIC RESETTING** .
- * **IEC - 934** METHOD OF TRIPPING: "**TO**" = **THERMAL** .
- * DEGREE OF TRIP - FREE BEHAVIOUR : "**CYCLING TRIP - FREE**"
- * RESET TYPE: AUTO RESET .

APPLICATIONS :

- * RECHARGE BATTERY UNIT
- * MOTOR WINDING
- * POWER ADATPOR