





**DG301**




N=Number of contacts

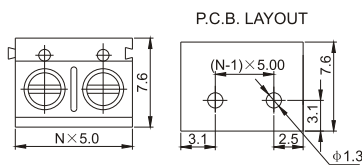


Pitch:5mm



**DG301R**

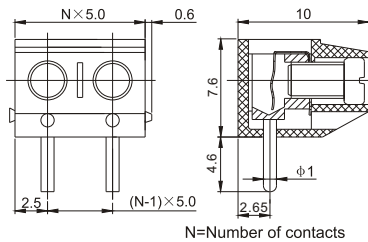


N=Number of contacts

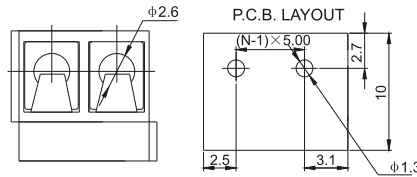


Pitch:5mm



**DG306**

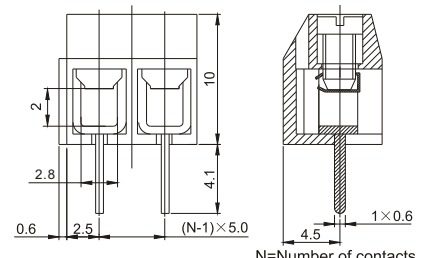

N=Number of contacts

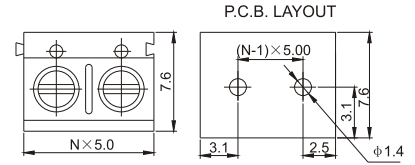

Pitch:5mm

- 材质及电镀**  
 螺丝: M2.5, 钢, 镀锌  
 簧片: 磷青铜, 镀镍或不锈钢  
 焊针: 黄铜, 镀锡  
 塑件: PBT, UL94V-0
- 电气性能**  
 额定电压: 300V  
 额定电流: 16A  
 接触电阻: 20mΩ  
 绝缘电阻: 5000MΩ/1000V  
 耐电压: AC1500V/1Min  
 使用线径: 22-14AWG 2.5mm<sup>2</sup>
- 机械性能**  
 温度范围: -30°C~+120°C  
 瞬时温度: +250°C 5秒  
 扭矩: 0.4Nm(3.6lb.in)  
 剥线长度: 4.5-5mm
- Material**  
 Screws: M2.5 steel Zinc plated  
 Wire guard: Phosphor bronze Ni plated or stainless steel  
 Pin header: Brass, Tin plated  
 Housing: PBT, UL94V-0
- Electrical**  
 Rated voltage: 300V  
 Rated current: 16A  
 Contact resistance: 20mΩ  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding voltage: AC1500V/1Min  
 Wire range: 22-14AWG 2.5mm<sup>2</sup>
- Mechanical**  
 Temp.Range: -30°C~+120°C  
 MAX Soldering: +250°C, for 5 Sec.  
 Torque: 0.4Nm(3.6lb.in)  
 Strip length: 4.5-5mm

- 材质及电镀**  
 螺丝: M2.5, 钢, 镀锌  
 簧片: 磷青铜, 镀镍或不锈钢  
 焊针: 黄铜, 镀锡  
 塑件: PBT, UL94V-0
- 电气性能**  
 额定电压: 300V  
 额定电流: 16A  
 接触电阻: 20mΩ  
 绝缘电阻: 5000MΩ/1000V  
 耐电压: AC1500V/1Min  
 使用线径: 22-14AWG 2.5mm<sup>2</sup>
- 机械性能**  
 温度范围: -30°C~+120°C  
 瞬时温度: +250°C 5秒  
 扭矩: 0.4Nm(3.6lb.in)  
 剥线长度: 4.5-5mm
- Material**  
 Screws: M2.5 steel Zinc plated  
 Wire guard: Phosphor bronze Ni plated or stainless steel  
 Pin header: Brass, Tin plated  
 Housing: PBT, UL94V-0
- Electrical**  
 Rated voltage: 300V  
 Rated current: 16A  
 Contact resistance: 20mΩ  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding voltage: AC1500V/1Min  
 Wire range: 22-14AWG 2.5mm<sup>2</sup>
- Mechanical**  
 Temp.Range: -30°C~+120°C  
 MAX Soldering: +250°C, for 5 Sec.  
 Torque: 0.4Nm(3.6lb.in)  
 Strip length: 4.5-5mm

- 材质及电镀**  
 螺丝: M2.5, 钢, 镀锌  
 簧片: 磷青铜, 镀镍或不锈钢  
 焊针: 黄铜, 镀锡  
 塑件: PBT, UL94V-0
- 电气性能**  
 额定电压: 300V  
 额定电流: 10A  
 接触电阻: 20mΩ  
 绝缘电阻: 5000MΩ/1000V  
 耐电压: AC1500V/1Min  
 使用线径: 22-14AWG 2.5mm<sup>2</sup>
- 机械性能**  
 温度范围: -30°C~+120°C  
 瞬时温度: +250°C 5秒  
 扭矩: 0.4Nm(3.6lb.in)  
 剥线长度: 4.5-5mm
- Material**  
 Screws: M2.5 steel Zinc plated  
 Wire guard: Phosphor bronze Ni plated or stainless steel  
 Pin header: Brass, Tin plated  
 Housing: PBT, UL94V-0
- Electrical**  
 Rated voltage: 300V  
 Rated current: 10A  
 Contact resistance: 20mΩ  
 Insulation resistance: 5000MΩ/1000V  
 Withstanding voltage: AC1500V/1Min  
 Wire range: 22-14AWG 2.5mm<sup>2</sup>
- Mechanical**  
 Temp.Range: -30°C~+120°C  
 MAX Soldering: +250°C, for 5 Sec.  
 Torque: 0.4Nm(3.6lb.in)  
 Strip length: 4.5-5mm