




Data Sheet

NC 100/200/300/400 Series
0.1 Hz to 110 GHz

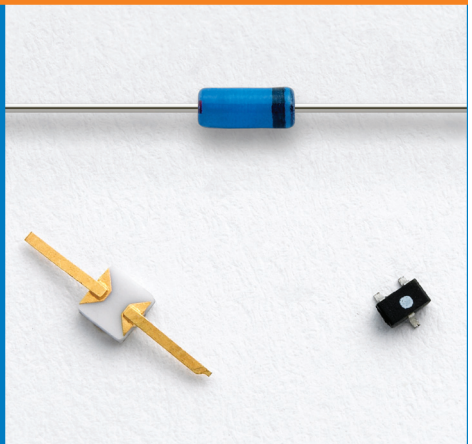

Count on the noise leader

Noise Diodes

Noisecom's noise diodes are the fundamental building blocks of all noise systems. They are hand-picked for performance characteristics that make them ideally suited to broadband noise generation with flat response.

All Noisecom noise diodes deliver symmetrical white Gaussian noise and flat output power versus frequency. The diodes are hermetically sealed and available in a wide variety of package styles. Special package configurations or screening processes are available upon request.

The NC100 and NC200 Series diodes are designed for audio and RF applications. The NC300 and NC400 Series diodes are designed for microwave applications in which a 50-ohm impedance is required.

Typical small signal impedance of the NC300 and NC400 Series is 10-20 ohms after a diode is biased. The output level is higher at low frequencies with low currents and driving the diodes with higher current results in greater output at higher frequencies.

Audio & VHF Types

| Model | Frequency | Operating Conditions | | | Minimum Output | Package |
|-------|------------------|----------------------|-----------------|--------|----------------|---------|
| | Range | V _b (V) | I _{op} | RL (Ω) | (μV/√Hz) | |
| NC101 | 0.1 Hz - 100 kHz | 7 - 10 | 30 - 60 μA | 2200 | 3.0 | DO-35 |
| NC102 | 0.1 Hz - 500 kHz | 7 - 10 | 30 - 60 μA | 2200 | 3.0 | DO-35 |
| NC103 | 0.1 Hz - 1 MHz | 7 - 10 | 30 - 60 μA | 2200 | 3.0 | DO-35 |
| NC104 | 0.1 Hz - 3 MHz | 7 - 10 | 30 - 60 μA | 2200 | 3.0 | DO-35 |
| NC201 | 0.1 Hz - 10 MHz | 7 - 10 | 0.2 - 0.5 mA | 2200 | 0.1 | DO-35 |
| NC202 | 0.1 Hz - 25 MHz | 7 - 10 | 0.2 - 0.5 mA | 2200 | 0.1 | DO-35 |
| NC203 | 0.1 Hz - 100 MHz | 7 - 10 | 0.2 - 0.5 mA | 50 | 0.05 | DO-35 |


RF & Microwave Types

| Model | Frequency | Operating Conditions | | | Output | Package |
|----------|------------------|----------------------|----------------------|--------|----------|----------------|
| | Range | V _b (V) | I _{op} (mA) | RL (Ω) | ENR (dB) | |
| NC302L | 10 Hz - 3 GHz | 6 - 8 | 6 | 50 | 30 - 35 | DO-35, BL, CH1 |
| NC303 | 10 Hz - 8 GHz | 8 - 12 | 8 | 50 | 30 - 35 | DO-35, BL, CH1 |
| NC303SOT | 10 Hz - 8 GHz | 8 - 10 | 8 | 50 | 30 - 35 | SOT323 |
| NC305 | 10 MHz - 11 GHz | 8 - 12 | 10 | 50 | 29 - 34 | BL, CH1 |
| NC401 | 100 MHz - 18 GHz | 8 - 12 | 10 | 50 | 30 - 35 | C10, C50H, CH2 |
| NC403 | 100 MHz - 27 GHz | 8 - 12 | 12 | 50 | 24 - 28 | C50, CH3 |
| NC404 | 18 GHz - 50 GHz | 8 - 12 | 15 | 50 | 20 - 25 | C50, CH3 |
| NC405 | 18 GHz - 75 GHz | 8 - 12 | 20 | 50 | 15 - 25 | C50, CH3 |
| NC406 | 18 GHz - 110 GHz | 8 - 12 | 25 | 50 | 15 - 25 | C50, CH3 |

1. For chip configuration, add suffix "C".
2. For beam lead configuration, add suffix "BL".
3. For C50H configuration, add suffix "H".

Specifications

| | |
|-----------------------|---|
| Output | White Gaussian Noise |
| Operating temperature | 0°C to +55°C temperature for NC100 series -55°C to +125°C for all others |
| Storage temperature | -65°C to +150°C |

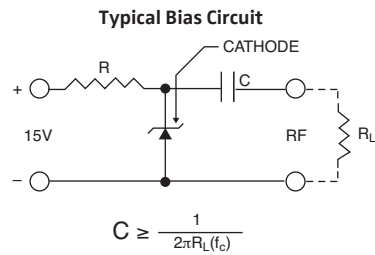

For NC100 Series
R = 150K

For NC200 Series
R = 15K


For NC300/400 Series
R = Adjust for performance

R_L = Load resistor
For recommended value, see charts on reverse page


$$C \geq \frac{1}{2\pi R_L(f_c)}$$

f_c = low frequency cut-off


CH1 Chip (inches)

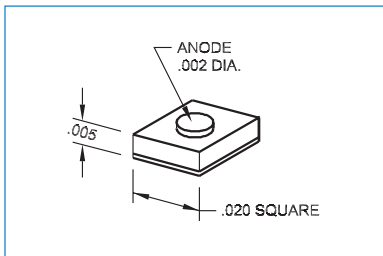


CH2 Chip (inches)

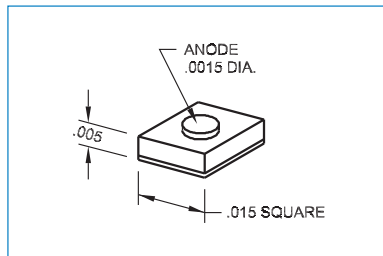


CH3 Chip (inches)

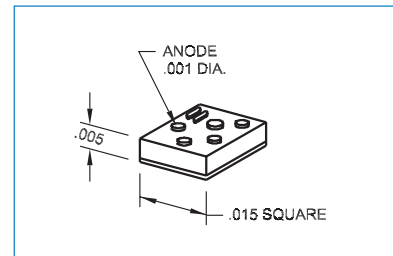


C10 (inches)

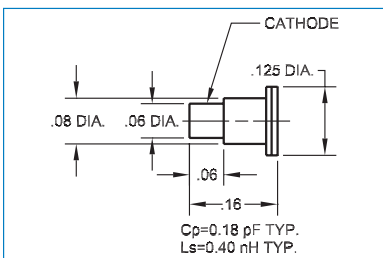


C50 (inches)

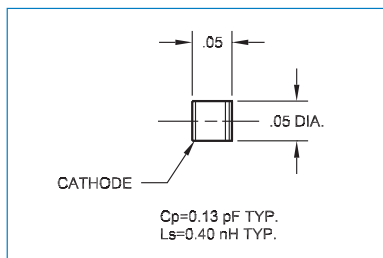


C50H (inches)

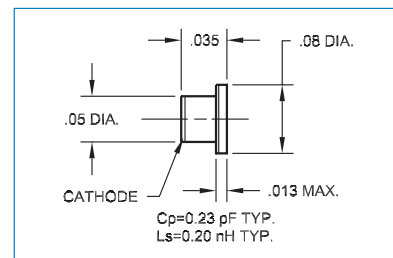


DO-35 Package (inches)

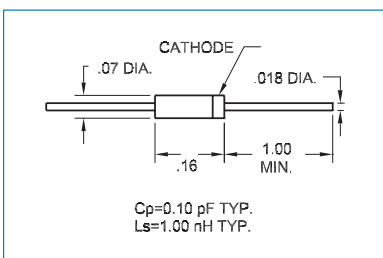

BL Package (inches)

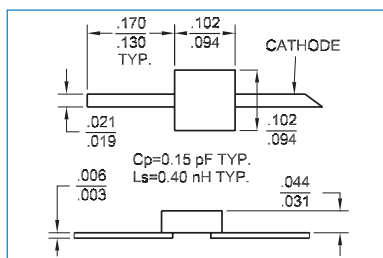

SOT323 Package (inches)

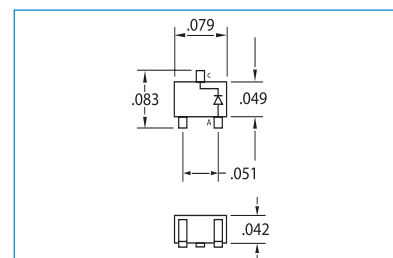

Wireless Telecom Group Inc.

25 Eastmans Rd
Parsippany, NJ
United States

Tel: +1 973 386 9696

Fax: +1 973 386 9191

www.noisecom.com

© Copyright 2011
All rights reserved.

N/NC100200300400/0611/EN
Note: Specifications, terms and conditions
are subject to change without prior notice.