


TEW5318 is designed to interface with the subscriber premises (NT) and the 2-wire line side of the central office equipment (LT) in the ISDN system.

TEW5318 meets the requirements for the **Mitel MT8972** and **MT8971B/72B** devices.



Features:

- Low profile construction.
- Handles 100 mA unbalanced line current.

TEW5318-1 is supplied with a "Flux-band" for additional cross talk suppression.

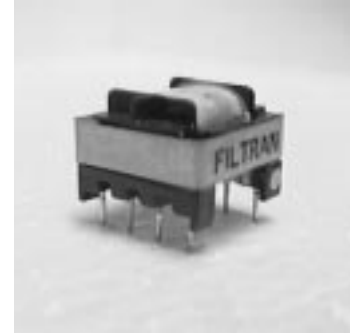

MECHANICAL

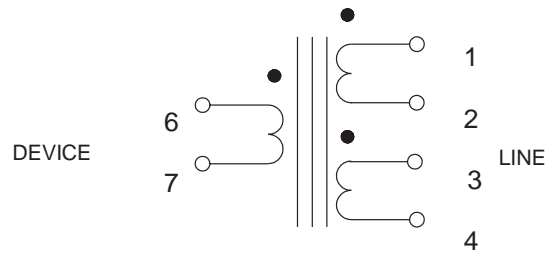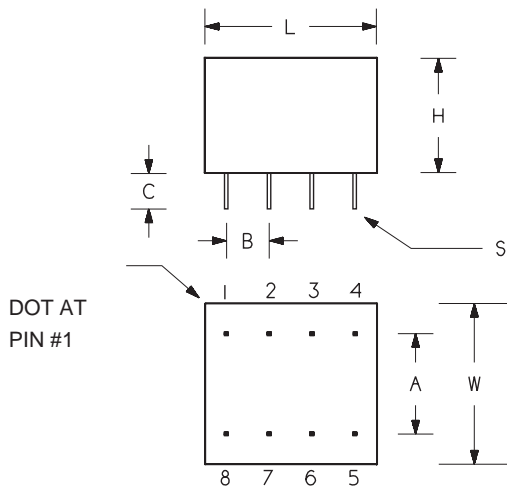

DIMENSIONS, Inches (mm)

P/N	L	W	H	A	B	C	S
TEW5318	0.87 (22.0)	0.83 (21.0)	0.63 (16.0)	0.60 (15.3)	0.20 (5.1)	0.12 (3.0)	0.025 (0.64)

ELECTRICAL SPECIFICATIONS

	TEW5318	TEW5318-1
Line Impedance	135 Ω	135 Ω
Inductance (6-7)	30 mH	30 mH
Leakage Inductance (short 2-3 & 1-4) (6-7)	95 μH	95 μH
Winding Resistance (1-2) + (3-4) (6-7)	3.5 Ω	3.5 Ω
Turns Ratio (6-7):(1-2):(3-4)	4:1:1	4:1:1
DC Capability (Line Side) (1 - 4)	100 mA	100 mA
Dielectric Strength	1500 V rms	1500 V rms
Flux-band provided	no	yes

94/12/14 TEW5318.chp8 Issue: A