



107 series

D-SUB RIGHT ANGLE TYPE(7.2mm 9.4mm 13.84mm)

Position	A	B	C	D
9	17.78	24.99	31.04	16.33
15	26.15	33.32	39.24	24.66
25	39.94	47.04	53.04	38.66
37	56.56	63.50	69.62	54.84

	E	F	G
B	7.2	18.4	9.62
D	9.4	20.64	12.06
C	13.84	25.3	16.5


Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 5AMP



Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Brass or Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)



How To Order

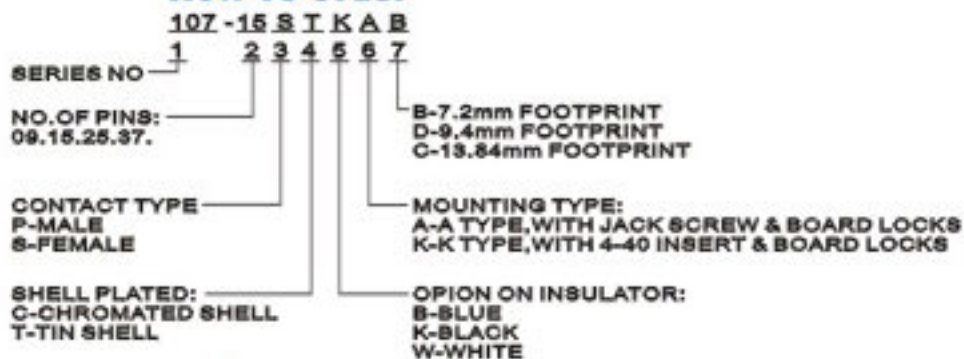


[MALE]

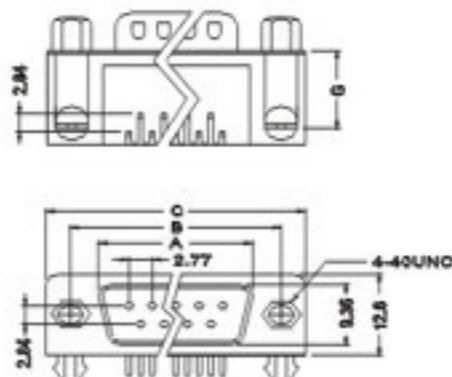


[FEMALE]

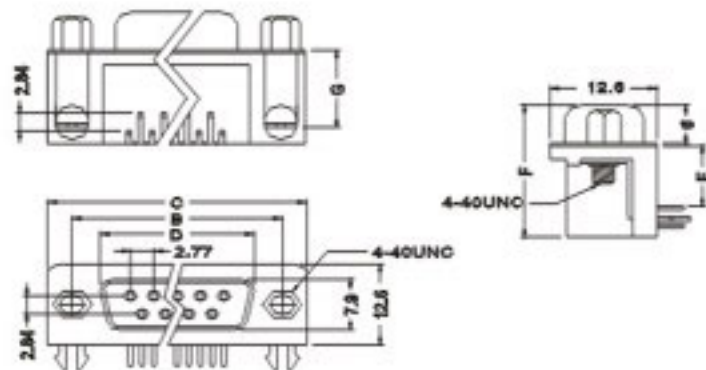

D-SUB CONNECTORS RIGHT ANGLE MOUNTING OPTIONS



A TYPE



K TYPE