

# 179 series

## USB-B FEMALE SOLDER








### Specifications:

Contact Resistance: 10m  $\Omega$  max.  
Insulator Resistance: 500M  $\Omega$  min.at DC 500V  
Current Rating: 24V DC 1AMP max

### Dielectric Withstanding:

Voltage: AC 500V For 1 minute  
Contact: Brass  
Housing: PBT &30% Glass Fiber(UL 94V-0)

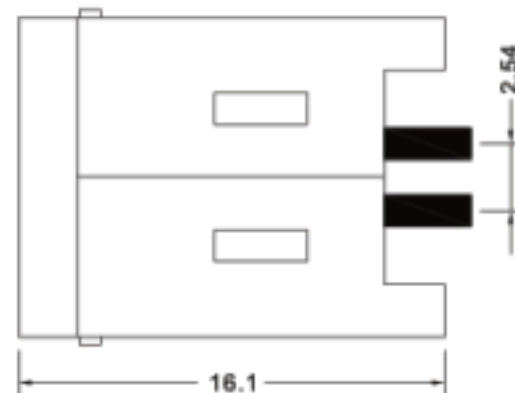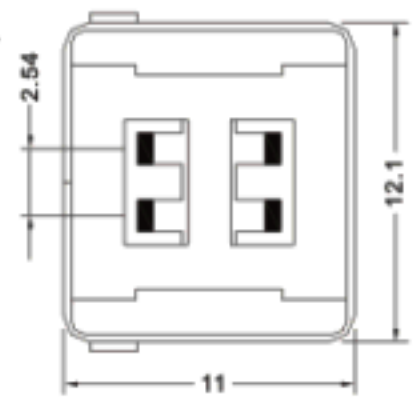

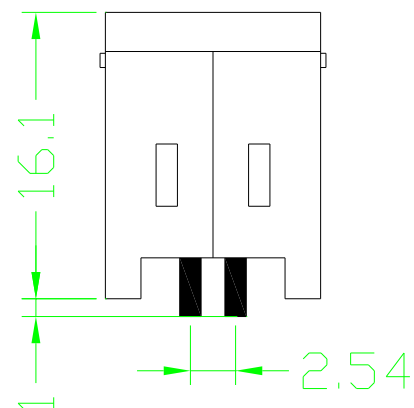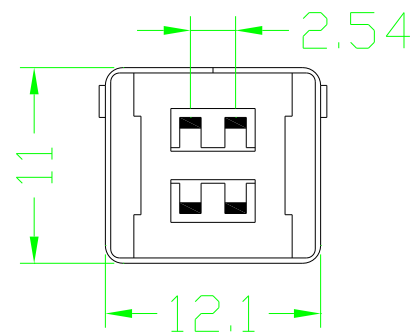

**Specifications:**

Contact Resistance: 10mΩ max.at DC 100 mA

Insulator Resistance: 500MΩ min.at DC 500V

Current Rating: 1AMP

**Dielectric Withstanding**

Voltage: AC 400V For 1 minute

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.' ±2°
 <b>新亚联合科技</b> XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.	.x ±0.1	.x' ±1°
		179 产品图	QJ/XYT-12142	.xx ±0.05	.xx' ±0.5°
		备注/Remark	页序/Sheet	.xxx ±0.01	
				单位/Units: mm	