

# FEMALE HEADER 2.0mm




## FEMALE HEADER 2.0mm H=4.0/4.3mm STRAIGHT TYPE

### SPECIFICATION

Current Rate:1.5 AMP  
 Insulation Resistance:1000MΩ Min  
 Contact Resistance:20mΩ Max  
 Dielectric voltage:500V AC for one minute  
 Operation Temperature:-40 °C to + 105°C


### MATERIAL

Insulator:Polyester,UL 94V-0  
 ◎ Standard:P.B.T or Nylon 6T  
 Contact Pin:Phospor Bronze  
 Finish:Tin, Gold Plated  
 ◎Standard:Gold Flash all over

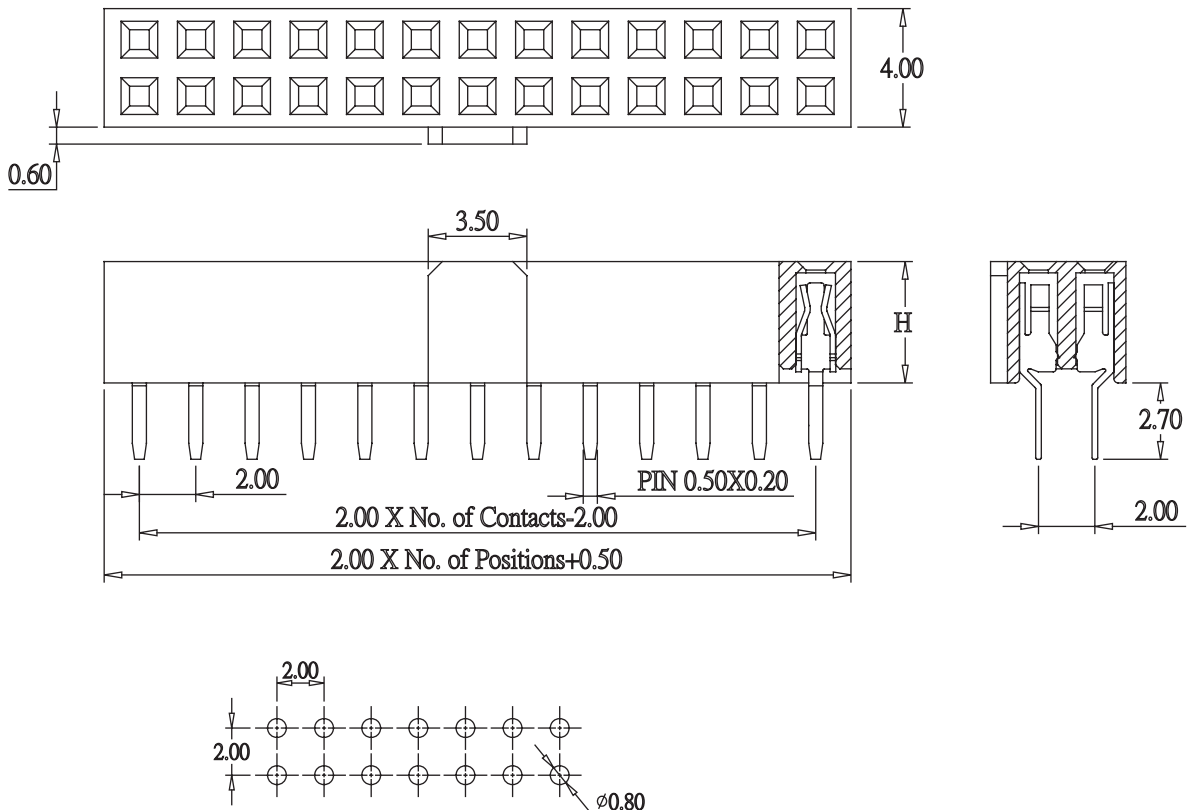

Recommended PCB Layout  
(PCB TOLERANCE  $\pm 0.05$ )

## ORDER INFORMATION

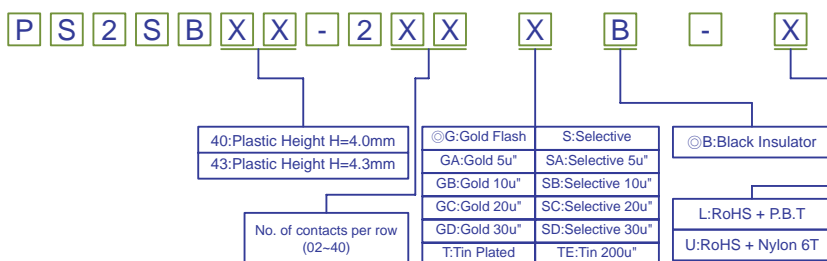

◎:Standard Recommend

RoHS Compliant