



CONNECTORS MANUFACTURE




PIN HEADER 2.54mm H=1.5/1.7/2.5mm STRAIGHT TYPE

SPECIFICATION



Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min
 Contact Resistance:20mΩ Max
 Dielectric voltage:1000V AC for one minute
 Operation Temperature:-40 °C to + 105°C

MATERIAL

Insulator:Polyester,UL 94V-0
 ◎ Standard:Nylon 6T or P.B.T
 Contact Pin:Brass
 Finish:Tin, Gold Plated
 ◎Standard:Gold Flash all over

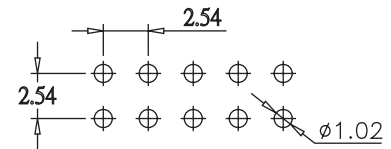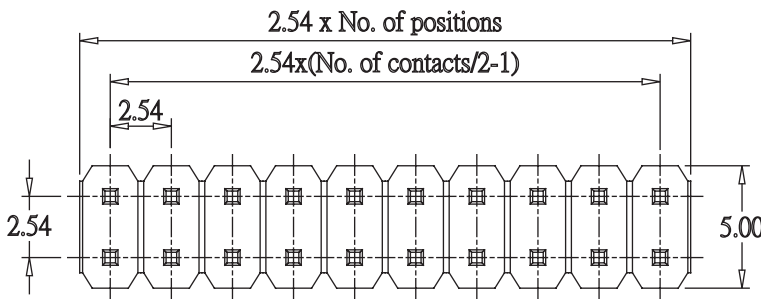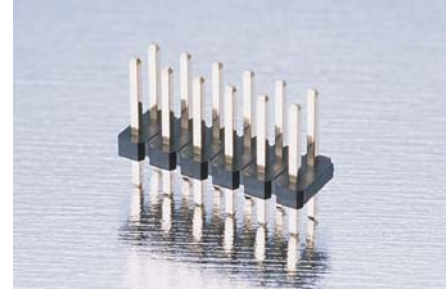


Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

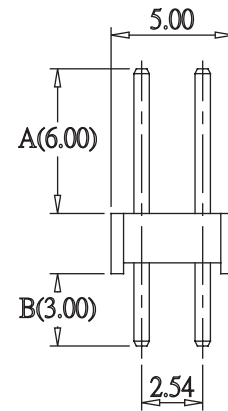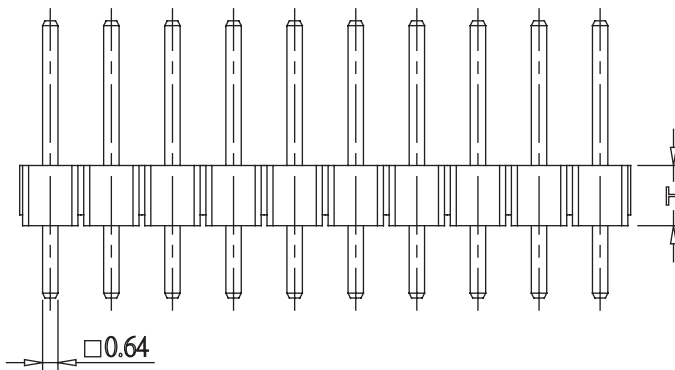

PIN HEADER 2.54mm



ORDER INFORMATION

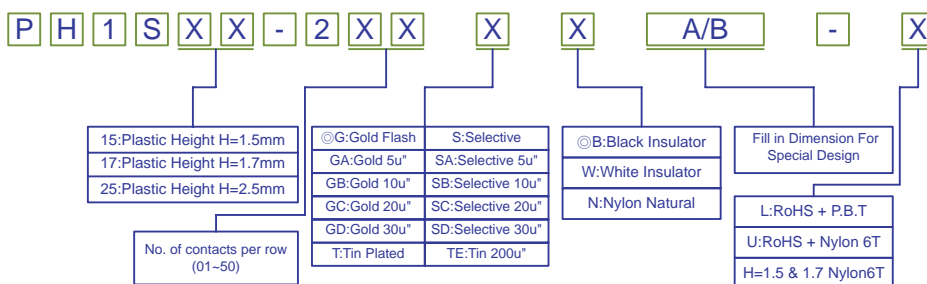

©:Standard Recommend

AMTEK CONNECTOR MANUFACTURE