



## Female Header 2.54mm 1 & 2 Row H=5.0mm Straight Type

### Specifications

Current Rate:3 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:1000V AC for one minute  
 Operation Temperature:-40°C to +105°C



### Material

Insulator:Polyester,UL 94V-0  
 ©Standard:PBT or Nylon 6T  
 Terminal:Copper Alloy  
 Plating:Gold Plated

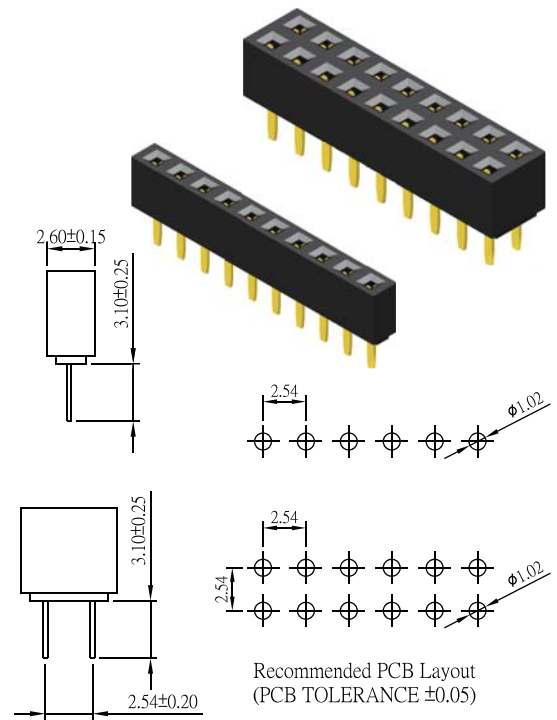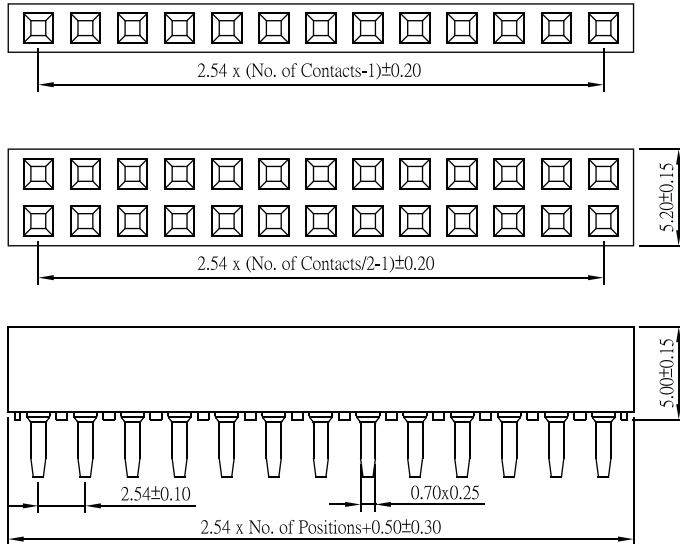

Part No.:PS1S50-1/2XX-L/U

## Female Header 2.54mm 1 & 2 Row H=5.7mm Straight Type

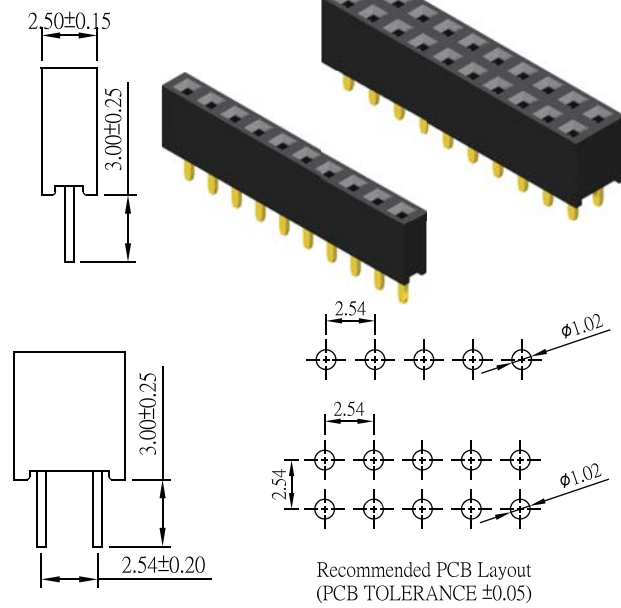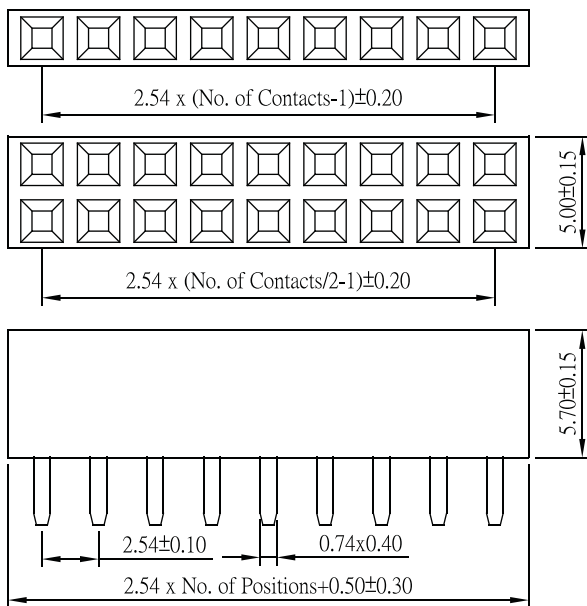

Part No.:PS1S57-1/2XX-L/U

## ORDER INFORMATION

