




Female Header 1.27mm 1 & 2 Row SMT / Straight Type

Specifications
 Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C


Material
 Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated

ORDER INFORMATION

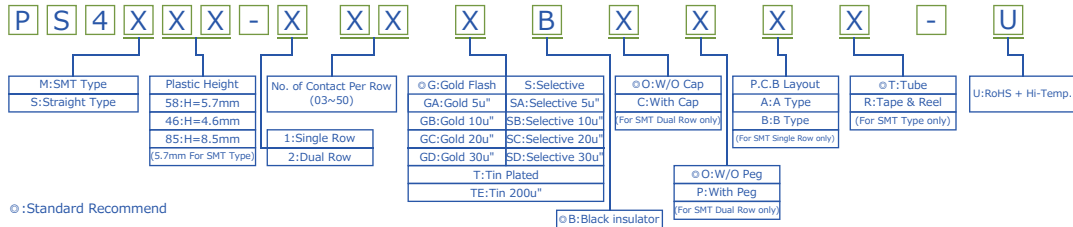


○: Standard Recommend


Female Header 1.27mm 1 & 2 Row H=5.7 SMT Type

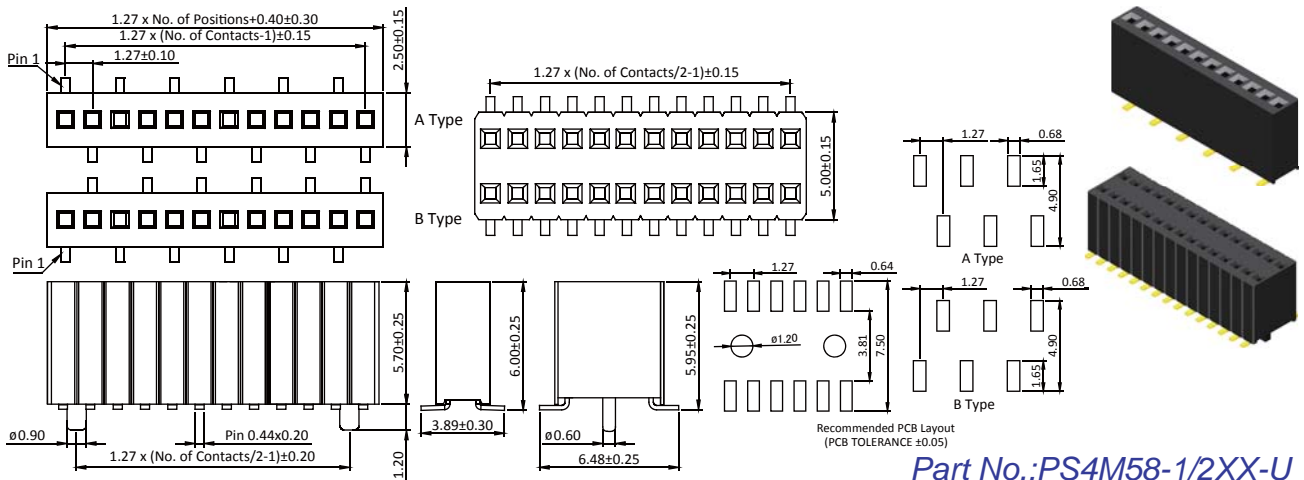

Female Header 1.27mm 1 & 2 Row H=4.6 Straight Type

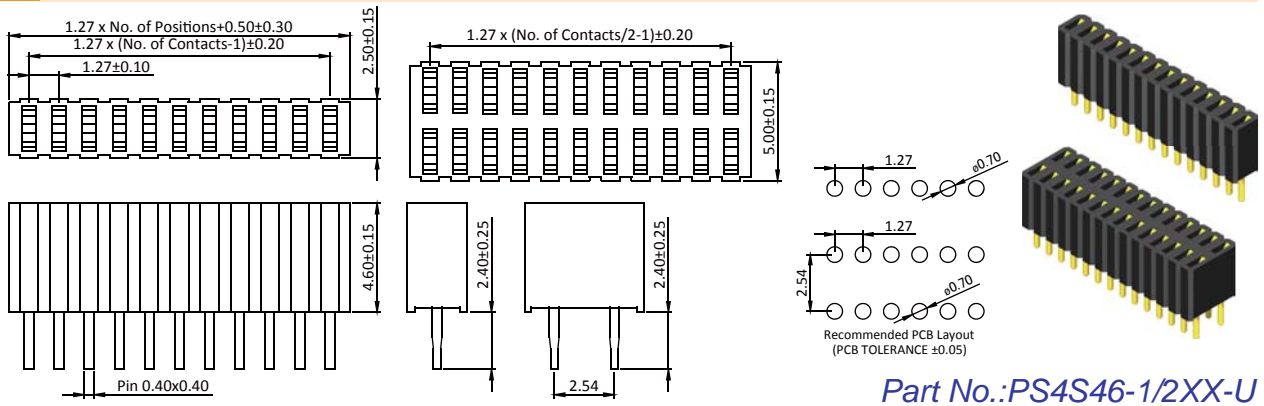

Female Header 1.27mm 1 & 2 Row H=8.5 Straight Type

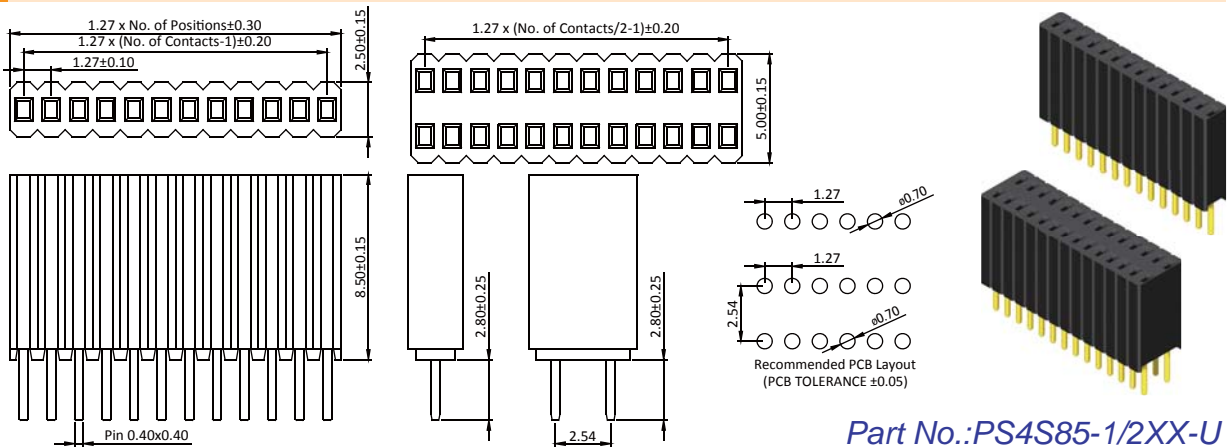

Female Header 1.27mm

ROHS

AMTEK CONNECTOR MANUFACTURING