



Pin Header 2.54mm



RoHS




Pin Header 2.54mm 1 Row H=1.5/1.7/2.5mm Stack Straight Type

Specifications

Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:1000V AC for one minute
 Operation Temperature:-40°C to +105°C

Material




Insulator:Polyester,UL 94V-0
 ©Standard:P.B.T or Nylon 6T
 Terminal:Copper Alloy
 Plating:Gold Plated

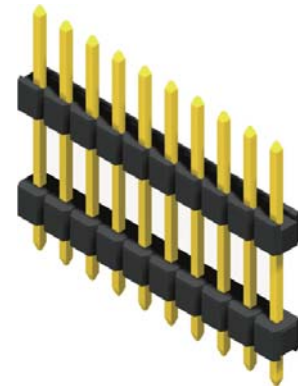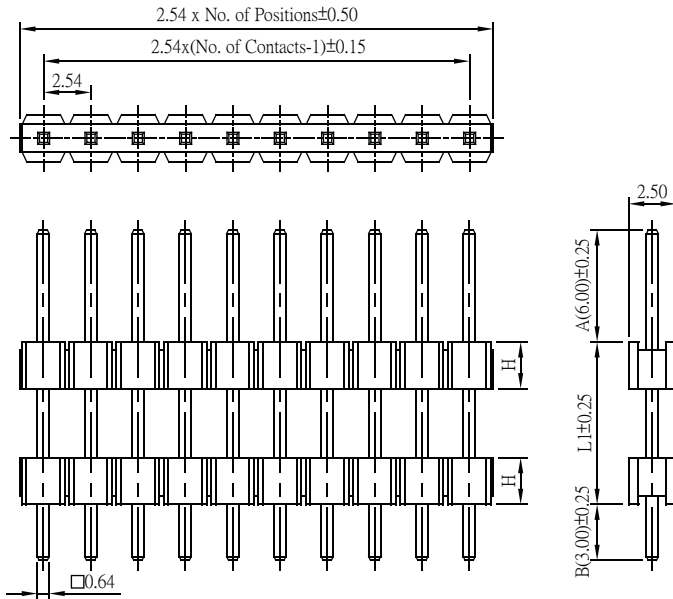

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Part No.:PH1D15/17/25-1XX-L/U


Pin Header 2.54mm 2 Row H=1.5/1.7/2.5mm Stack Straight Type

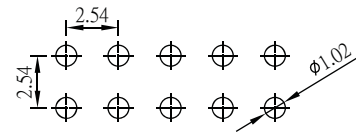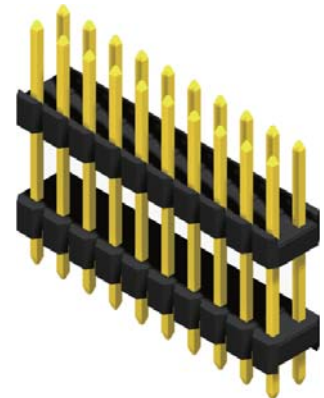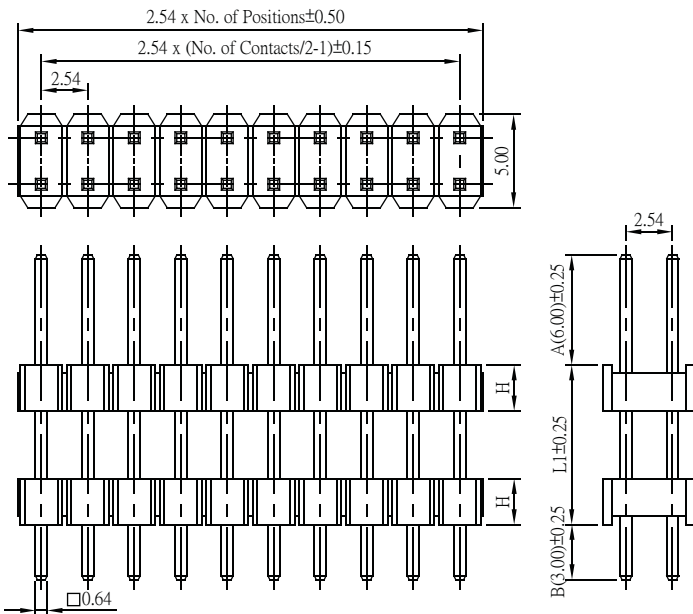

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Part No.:PH1D15/17/25-2XX-L/U

ORDER INFORMATION

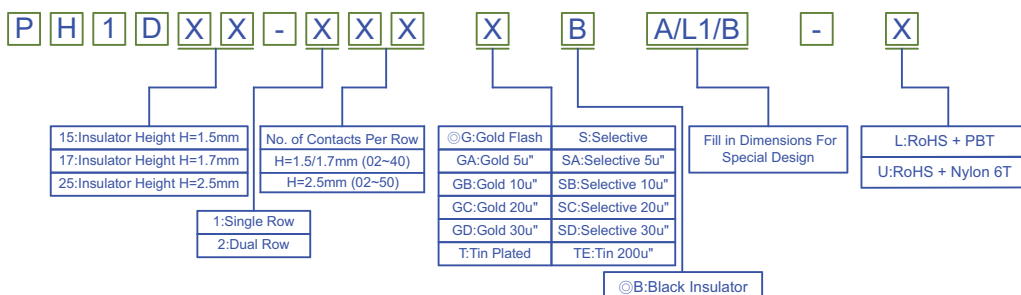

©:Standard Recommended

CONNECTORS MANUFACTURE