



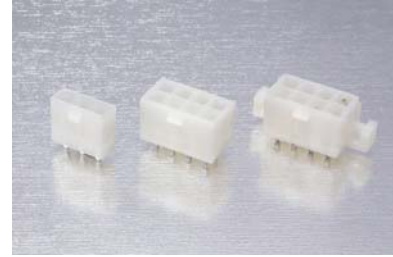


CONNECTORS MANUFACTURE

4.2mm WAFER SQ PIN STRAIGHT TYPE


SPECIFICATIONS
 Current Rating: 7A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)



P.C.B LAYOUT





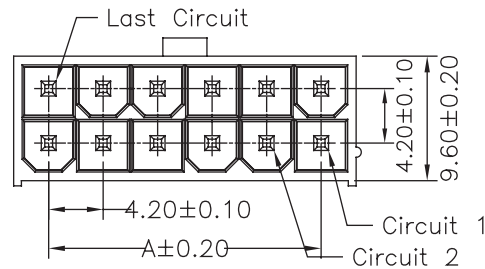


PART NO.	Dimensions	
	A	B
4200SQ-201TW2-L	---	5.40
4200SQ-202TW2-L	4.20	9.60
4200SQ-203TW2-L	8.40	13.80
4200SQ-204TW2-L	12.60	18.00
4200SQ-205TW2-L	16.80	22.20
4200SQ-206TW2-L	21.00	26.40
4200SQ-207TW2-L	25.20	30.60
4200SQ-208TW2-L	29.40	34.80
4200SQ-209TW2-L	33.60	39.00
4200SQ-210TW2-L	37.80	43.20
4200SQ-211TW2-L	42.00	47.40
4200SQ-212TW2-L	46.20	51.60

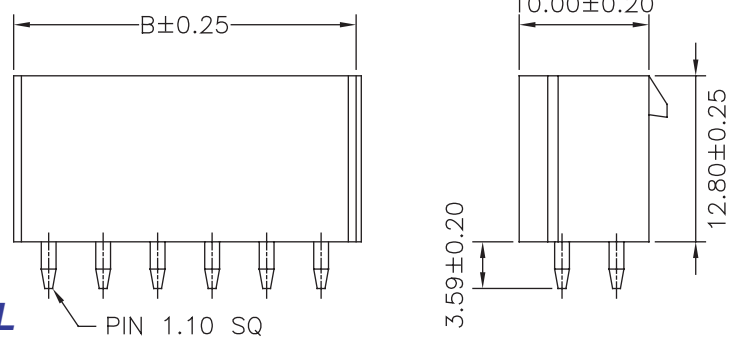

Part No.:4200SQ-2XXTW2-L

SPECIFICATIONS
 Current Rating: 7A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)

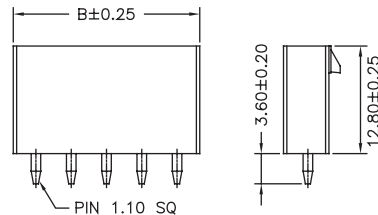

PART NO.	Dimensions	
	A	B
4200SQ-102TW2-L	4.20	9.60
4200SQ-103TW2-L	8.40	13.80
4200SQ-104TW2-L	12.60	18.00
4200SQ-105TW2-L	16.80	22.20

Part No.:4200SQ-1XXTW2-L

Housing Wafer Terminal



AMTEK CONNECTOR MANUFACTURE