



5.08mm WAFER RIGHT ANGLE / STRAIGHT TYPE

SPECIFICATIONS





Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)

PART NO.	Dimensions	
	A	B
5083RA-02TW-L	5.08	10.16
5083RA-03TW-L	10.16	15.24
5083RA-04TW-L	15.24	20.32
5083RA-05TW-L	20.32	25.40
5083RA-06TW-L	25.40	30.48
5083RA-07TW-L	30.48	35.56
5083RA-08TW-L	35.56	40.64
5083RA-09TW-L	40.64	45.72
5083RA-10TW-L	45.72	50.80
5083RA-11TW-L	50.80	55.88
5083RA-12TW-L	55.88	60.96
5083RA-13TW-L	60.96	66.04
5083RA-14TW-L	66.04	71.12
5083RA-15TW-L	71.12	76.20
5083RA-16TW-L	76.20	81.28
5083RA-17TW-L	81.28	86.36
5083RA-18TW-L	86.36	91.44
5083RA-19TW-L	91.44	96.52
5083RA-20TW-L	96.52	101.60

Part No.:5083RA-XXTW-L



P.C.B LAYOUT

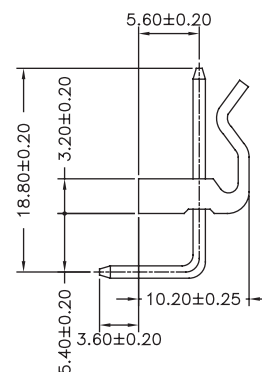

P.C.B LAYOUT

SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)

PART NO.	Dimensions	
	A	B
5083SA-02TW-L	5.08	10.16
5083SA-03TW-L	10.16	15.24
5083SA-04TW-L	15.24	20.32
5083SA-05TW-L	20.32	25.40
5083SA-06TW-L	25.40	30.48
5083SA-07TW-L	30.48	35.56
5083SA-08TW-L	35.56	40.64
5083SA-09TW-L	40.64	45.72
5083SA-10TW-L	45.72	50.80
5083SA-11TW-L	50.80	55.88
5083SA-12TW-L	55.88	60.96
5083SA-13TW-L	60.96	66.04
5083SA-14TW-L	66.04	71.12
5083SA-15TW-L	71.12	76.20
5083SA-16TW-L	76.20	81.28
5083SA-17TW-L	81.28	86.36
5083SA-18TW-L	86.36	91.44
5083SA-19TW-L	91.44	96.52
5083SA-20TW-L	96.52	101.60

Part No.:5083SA-XXTW-L

