

DIP PLUG





DIP PLUG 2.54mm

SPECIFICATION

Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min
 Contact Resistance:30mΩ Max
 Dielectric voltage:1000V AC for one minute
 Operation Temperature:-55 °C to + 105°C


MATERIAL

Insulator:Polyester,UL 94V-0
 ◎ Standard:P.B.T
 Contact Pin:Brass

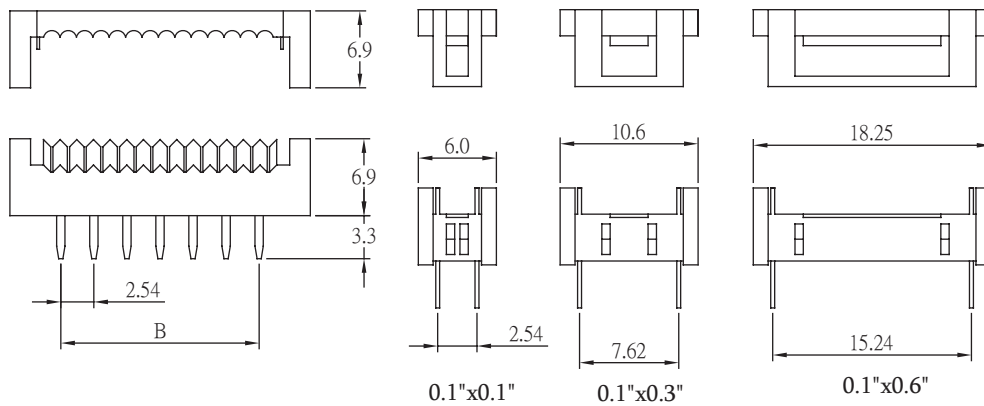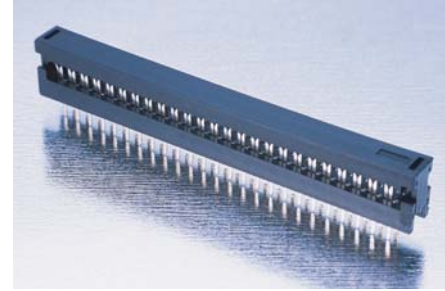


◎ Mate flat cable 1.27 mm

POSITION	A	B	0.1"= 2.54
10	17.76	10.16	
14	22.84	15.24	
16	25.38	17.78	
20	30.46	22.86	
26	38.08	30.48	
30	43.16	35.56	
34	48.24	40.64	
40	55.86	48.26	
50	68.56	60.96	
60	81.26	73.66	
POSITION	A	B	0.3"= 7.62
8	15.44	7.62	
10	17.98	10.16	
14	23.06	15.24	
16	25.60	17.78	
18	28.14	20.32	
20	30.68	22.86	
24	35.76	27.94	
28	40.84	33.02	
40	56.08	48.26	
POSITION	A	B	0.6"= 15.24
24	35.76	27.94	
28	40.84	33.02	
32	45.92	38.10	
36	51.00	43.18	
40	56.08	48.26	

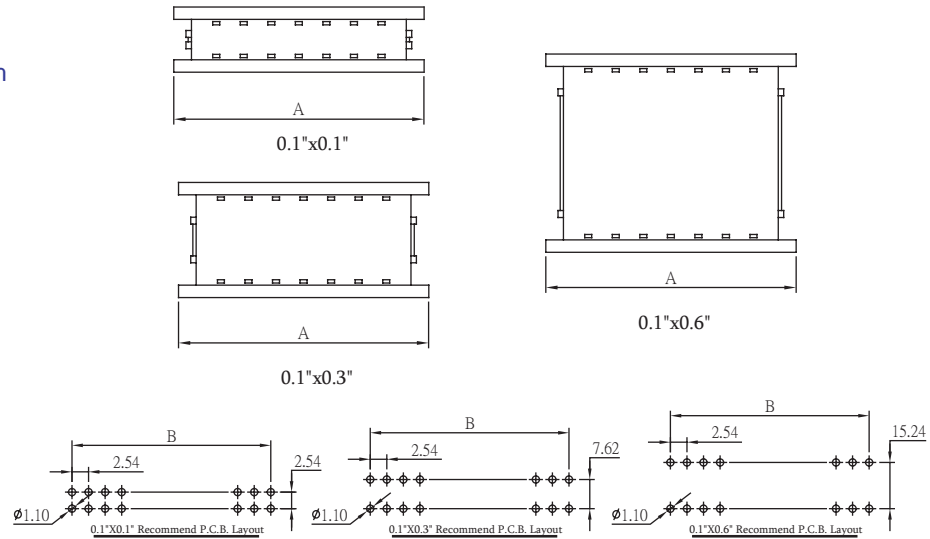

ORDER INFORMATION

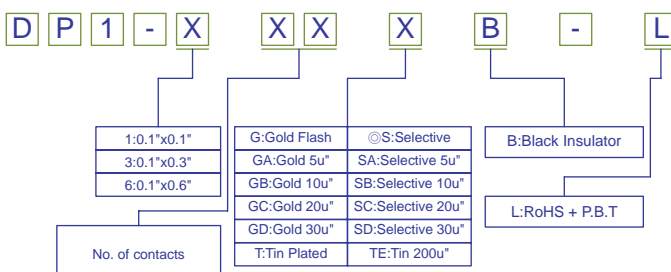

◎:Standard Recommend

RoHS Compliant

254