




CONNECTORS MANUFACTURER


2.5mm Wafer Right Angle / Straight Type

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 500V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Pantone Color: 153C

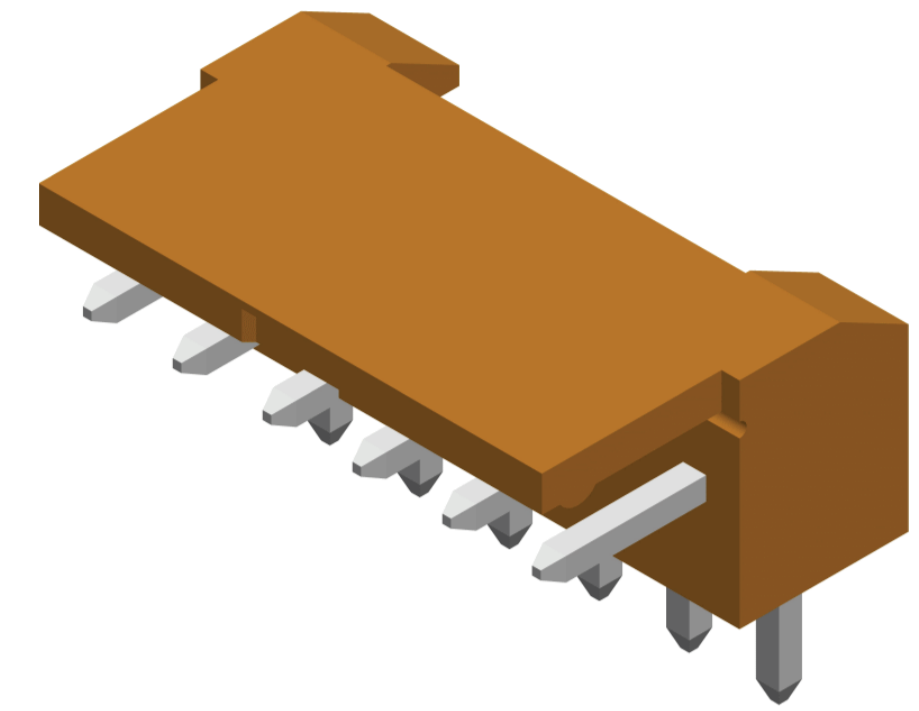


PART NO.	Dimensions	
	A	B
2504R-02TR-L	2.50	5.00
2504R-03TR-L	5.00	7.50
2504R-04TR-L	7.50	10.00
2504R-05TR-L	10.00	12.50
2504R-06TR-L	12.50	15.00
2504R-07TR-L	15.00	17.50
2504R-08TR-L	17.50	20.00
2504R-09TR-L	20.00	22.50
2504R-10TR-L	22.50	25.00
2504R-11TR-L	25.00	27.50
2504R-12TR-L	27.50	30.00
2504R-13TR-L	30.00	32.50
2504R-14TR-L	32.50	35.00
2504R-15TR-L	35.00	37.50

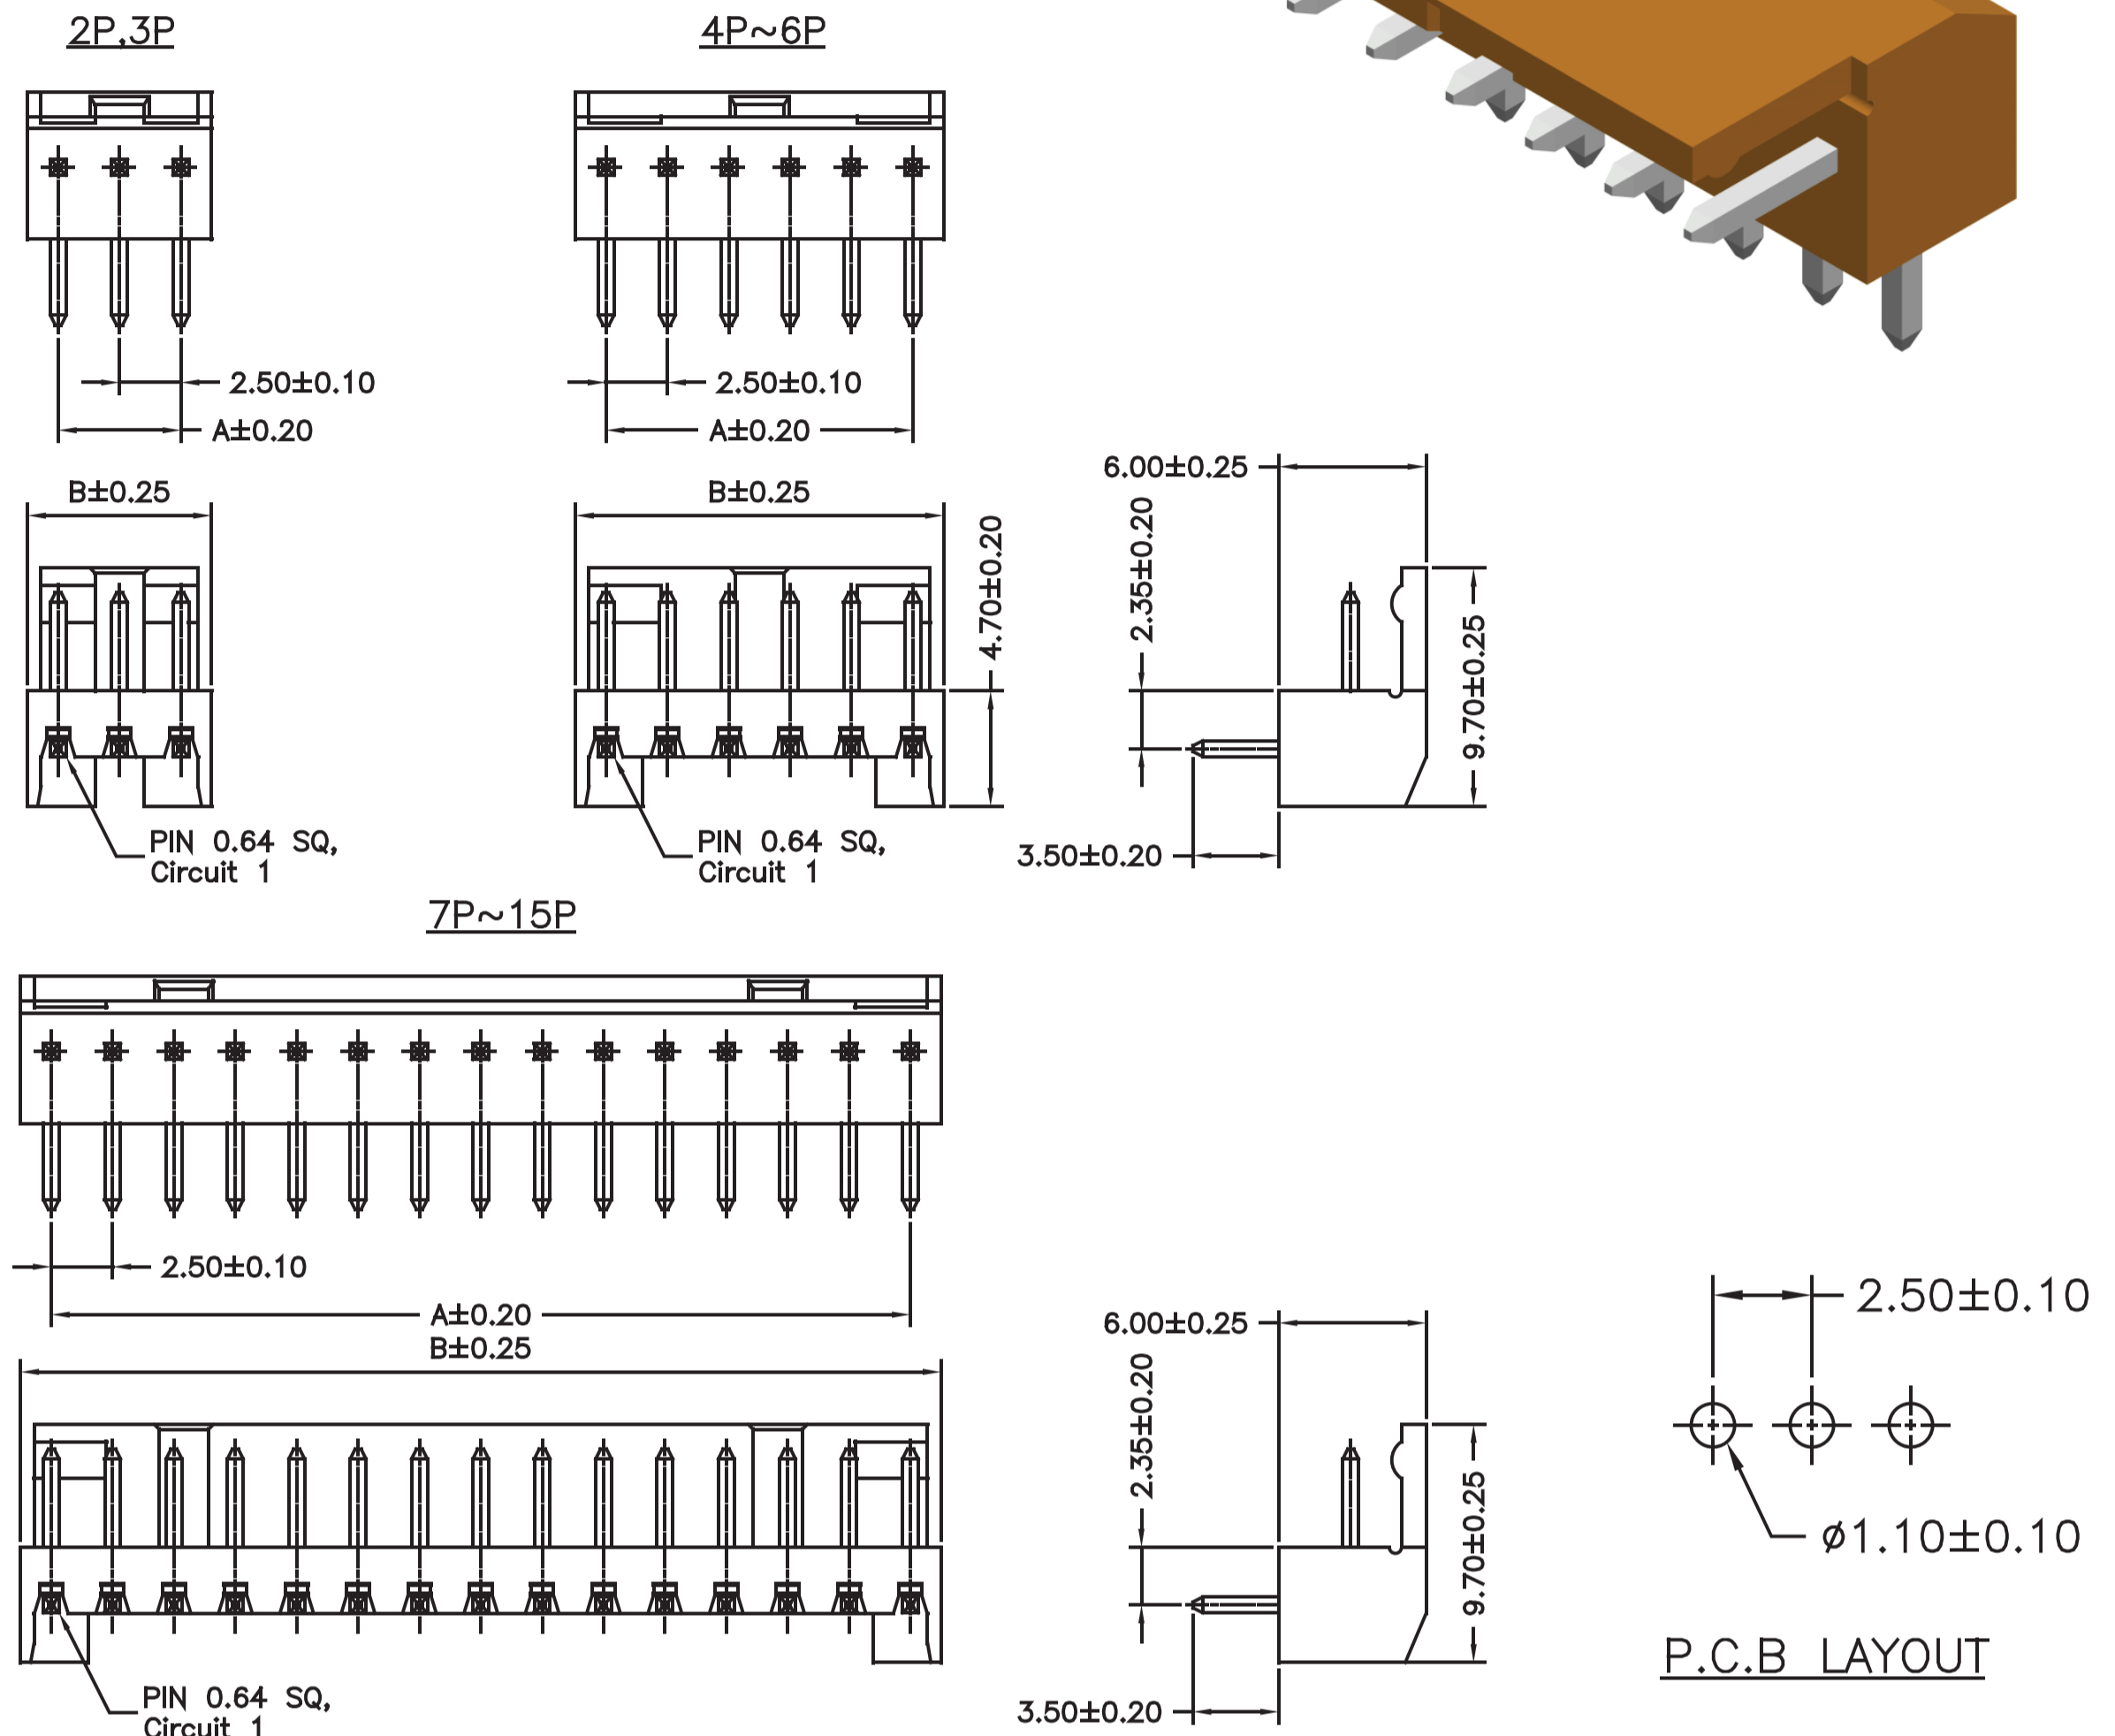


Part No.:2504R-XXTR-L

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 500V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Pantone Color: 153C

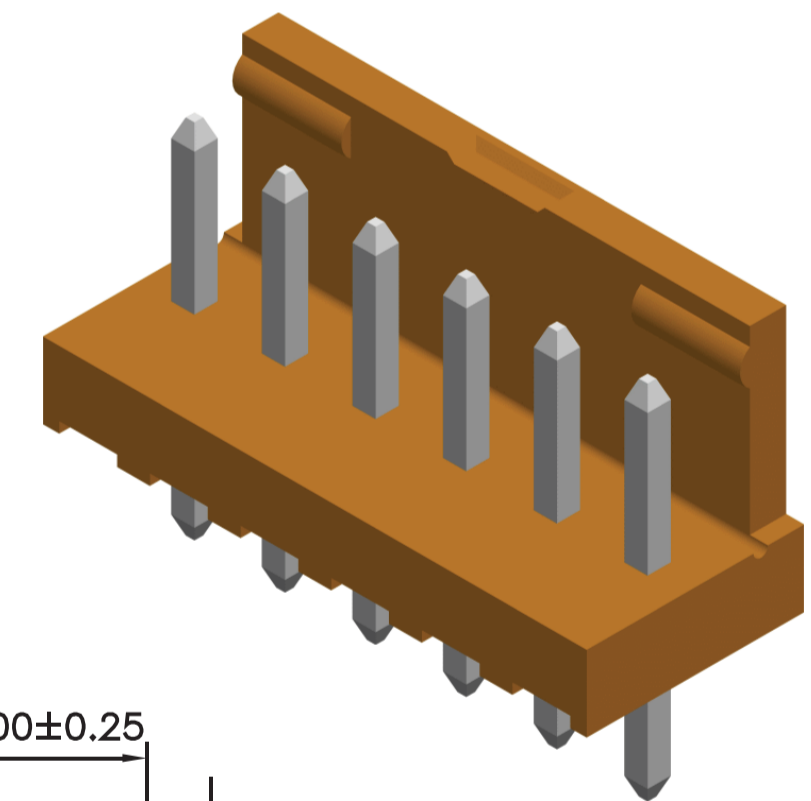

PART NO.	Dimensions	
	A	B
2504S-02TR-L	2.50	5.00
2504S-03TR-L	5.00	7.50
2504S-04TR-L	7.50	10.00
2504S-05TR-L	10.00	12.50
2504S-06TR-L	12.50	15.00
2504S-07TR-L	15.00	17.50
2504S-08TR-L	17.50	20.00
2504S-09TR-L	20.00	22.50
2504S-10TR-L	22.50	25.00
2504S-11TR-L	25.00	27.50
2504S-12TR-L	27.50	30.00
2504S-13TR-L	30.00	32.50
2504S-14TR-L	32.50	35.00
2504S-15TR-L	35.00	37.50

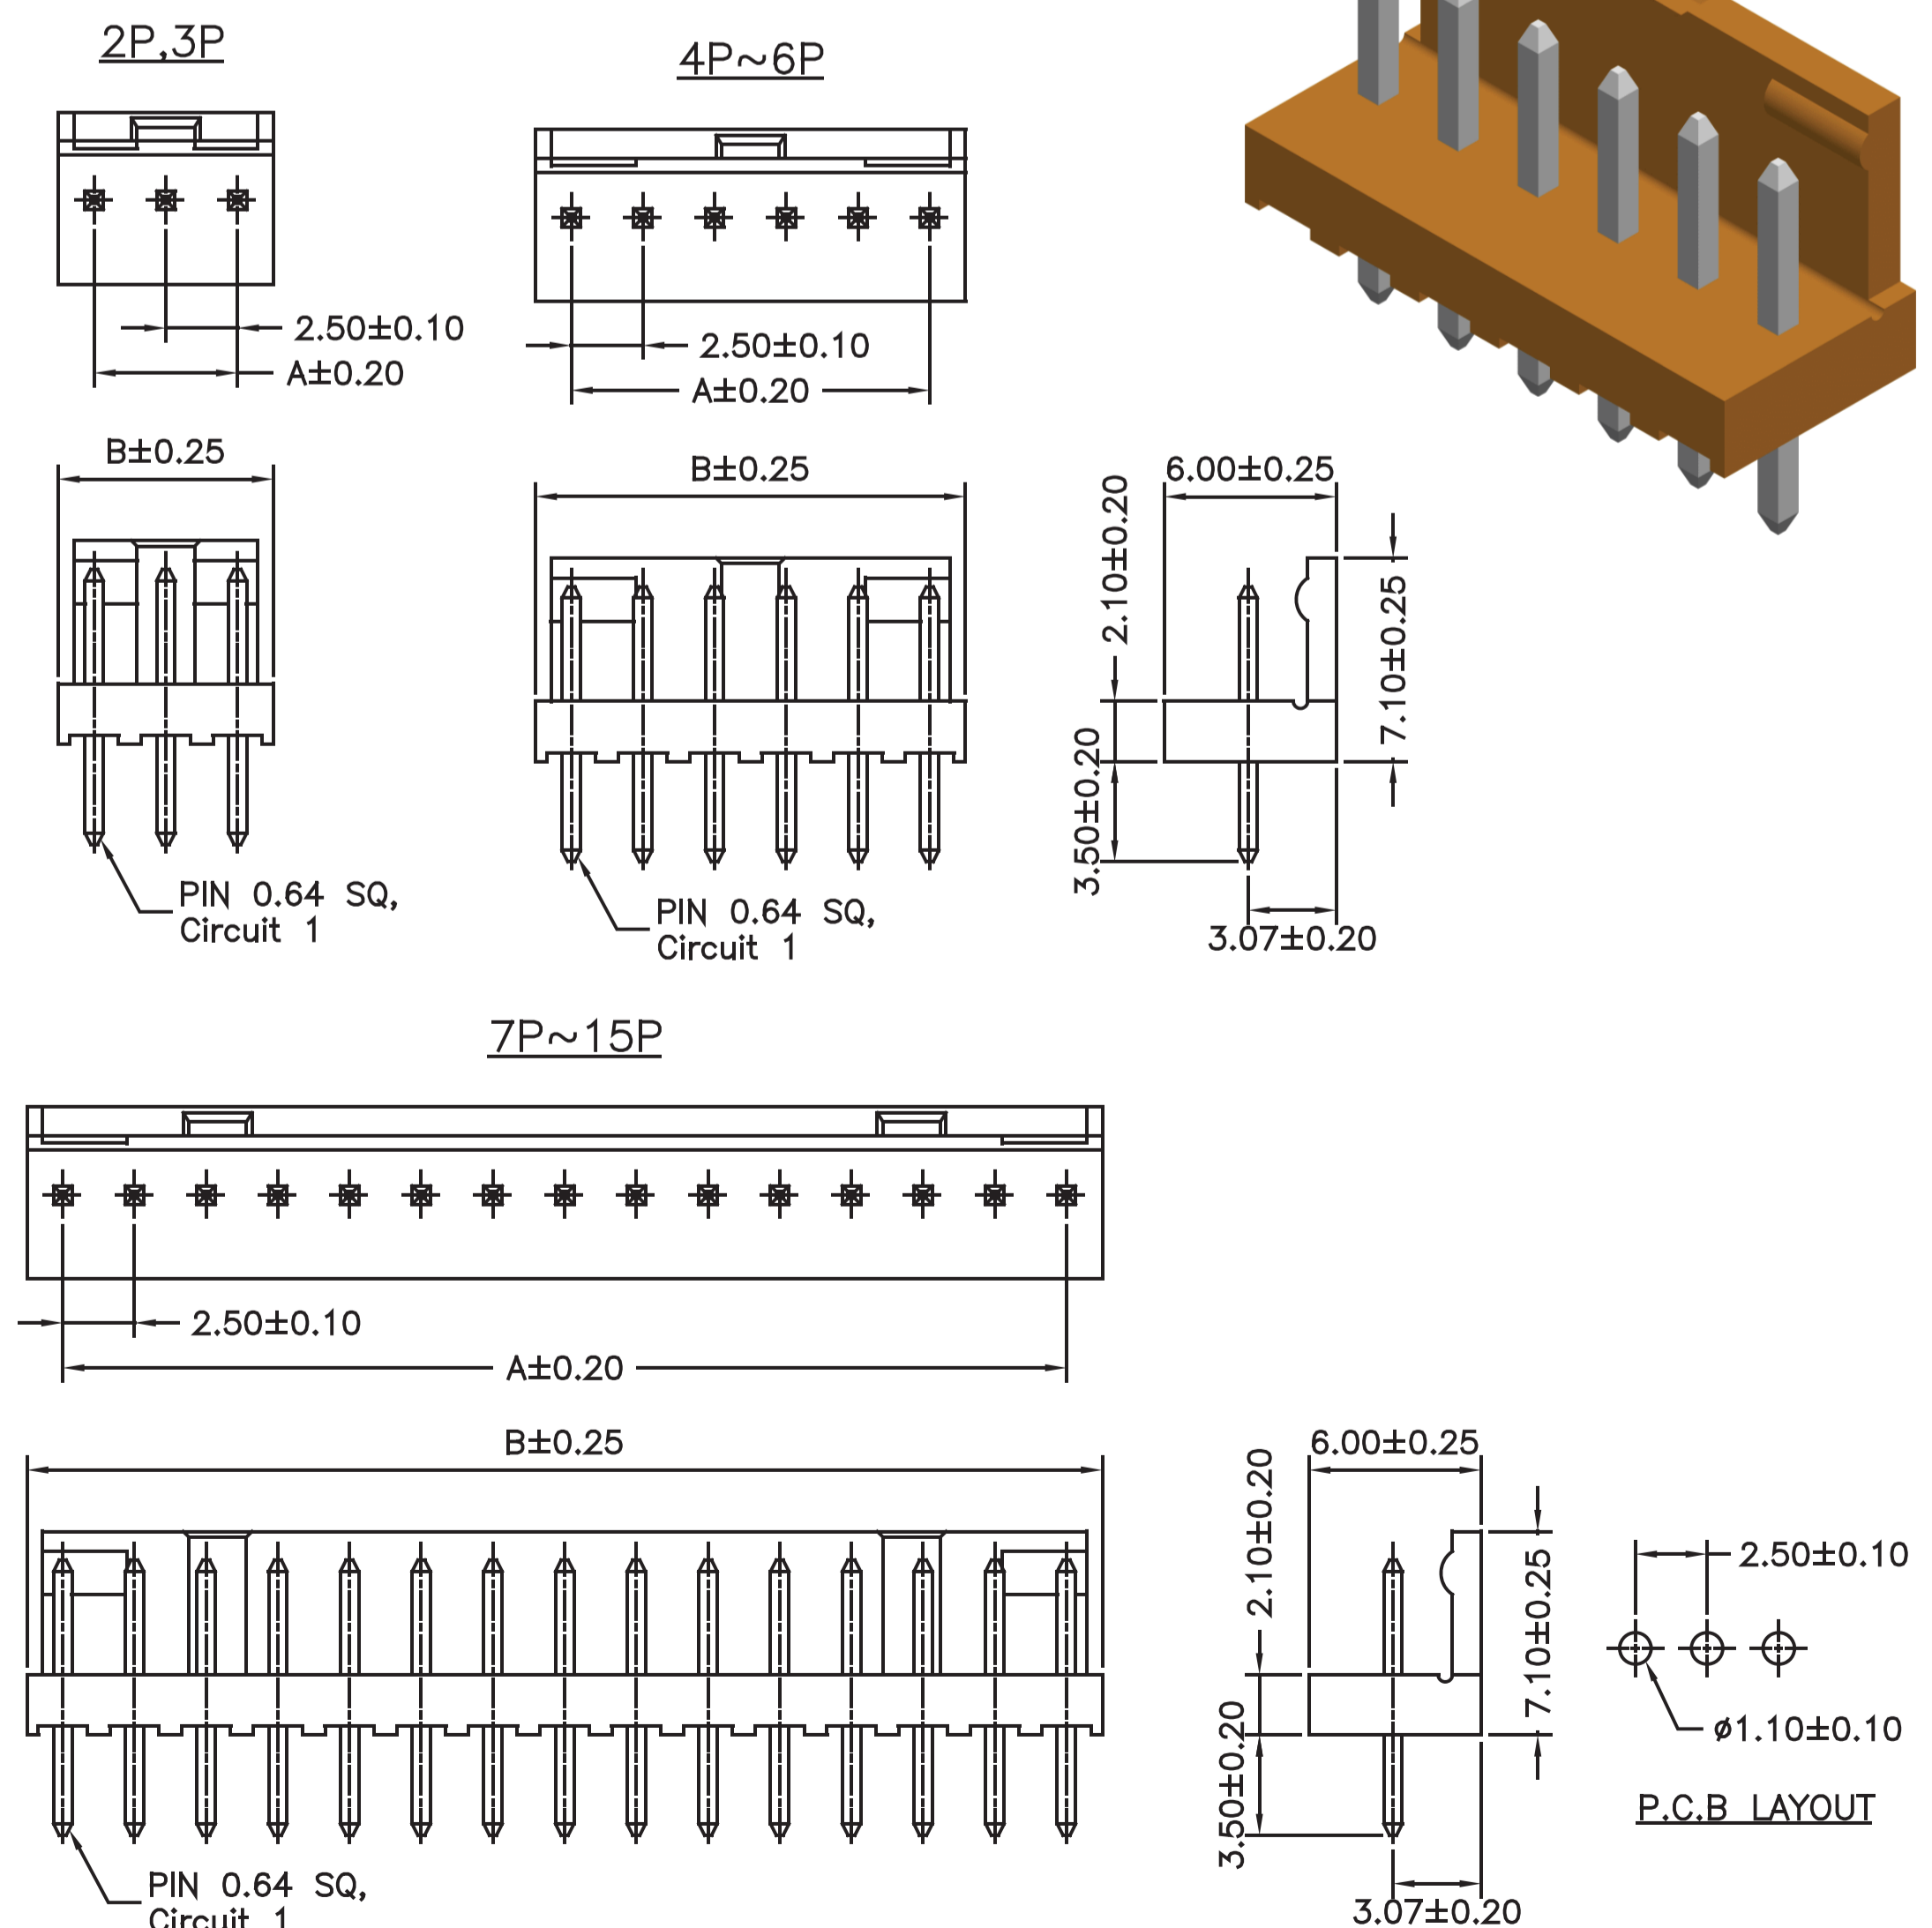

Part No.:2504S-XXTR-L

Housing wafer Terminal



RoHS

AMTEK COMMUNICATIONS MANUFACTURING