

SPECIFICATION


Current Rate:3 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-40°C to +105 °C

MATERIAL





Insulator:High Temperature Thermoplastic , Nylon 6T ,UL 94V-0
 Terminal:Copper Alloy
 Plated: Gold Plated

ORDER INFORMATION

P H 1 M R - 1 X X X X X O X A - U

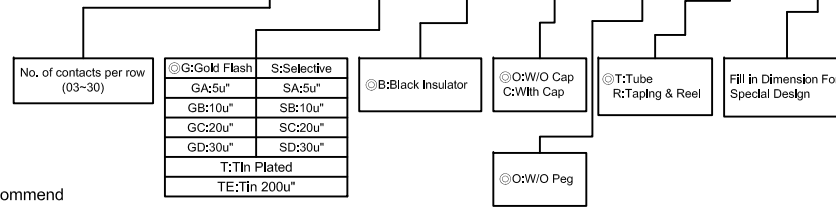

Ⓞ:Standard Recommend

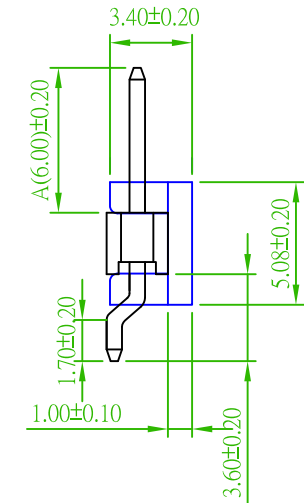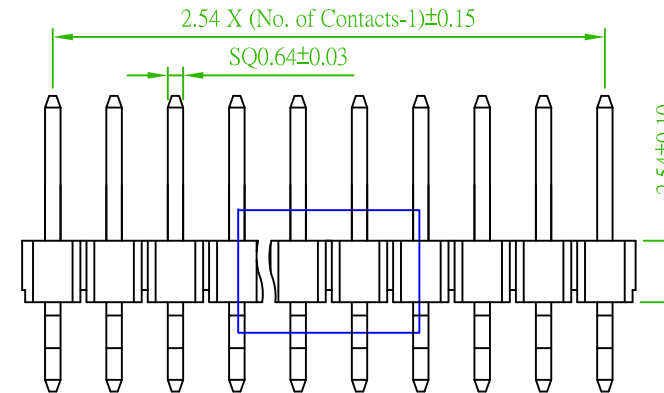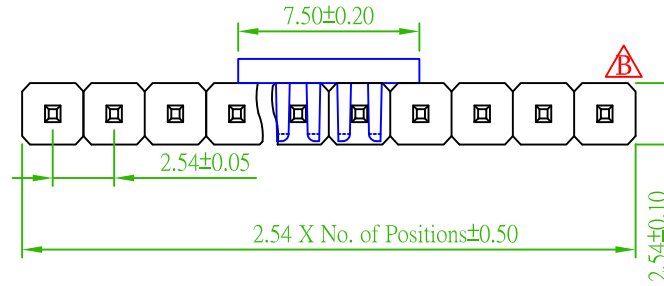

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

	品名 TITLE	PIN HEADER 2.54mm SMT RIGHT ANGLE TYPE				
	品號 PART NO.	PH1MR-1XX-U			日期 DATE	2010/12/16
	圖號 DRAWING NO.	PH1MR-1XX-U	版本 REV.	A	繪圖 DRAWN	Sinnys
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	Alvin
	公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm	核准 APPROVED	James

REV.	Revised the Cap Drawing	2012/06/14 Jeff
AREA	DESCRIPTION	DATE