

### SPECIFICATION

Current Rate:3 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric voltage:1000V AC for one minute  
 Operation Temperature:-40 ° C to +105 ° C



**MATERIAL**  
 Insulator:Polyester, UL 94V-0◎Standard:P.B.T  
 Contact Pin:Copper Alloy

### ORDER INFORMATION

**P H 1 R D 2 5 - 2 X X A B / C - L**

◎Standard Recommend

No. of contacts per row (02-50)	◎Gold Flash GA:50" GB:10" GC:20" GD:30" TE:1in 2000"	SS:selective SA:50" SB:10" SC:20" SD:30" T:1in Plated	◎Black Insulator W:nylon Insulator G:nylon natural	Fill In Dimension For Special Design	L:Rohs + P.B.T
---------------------------------	---	--	--	--------------------------------------	----------------

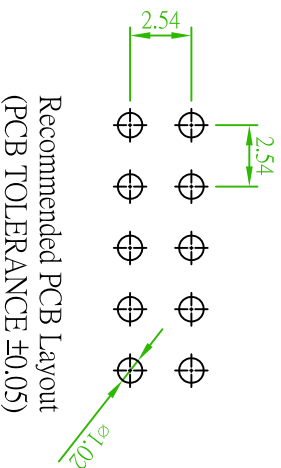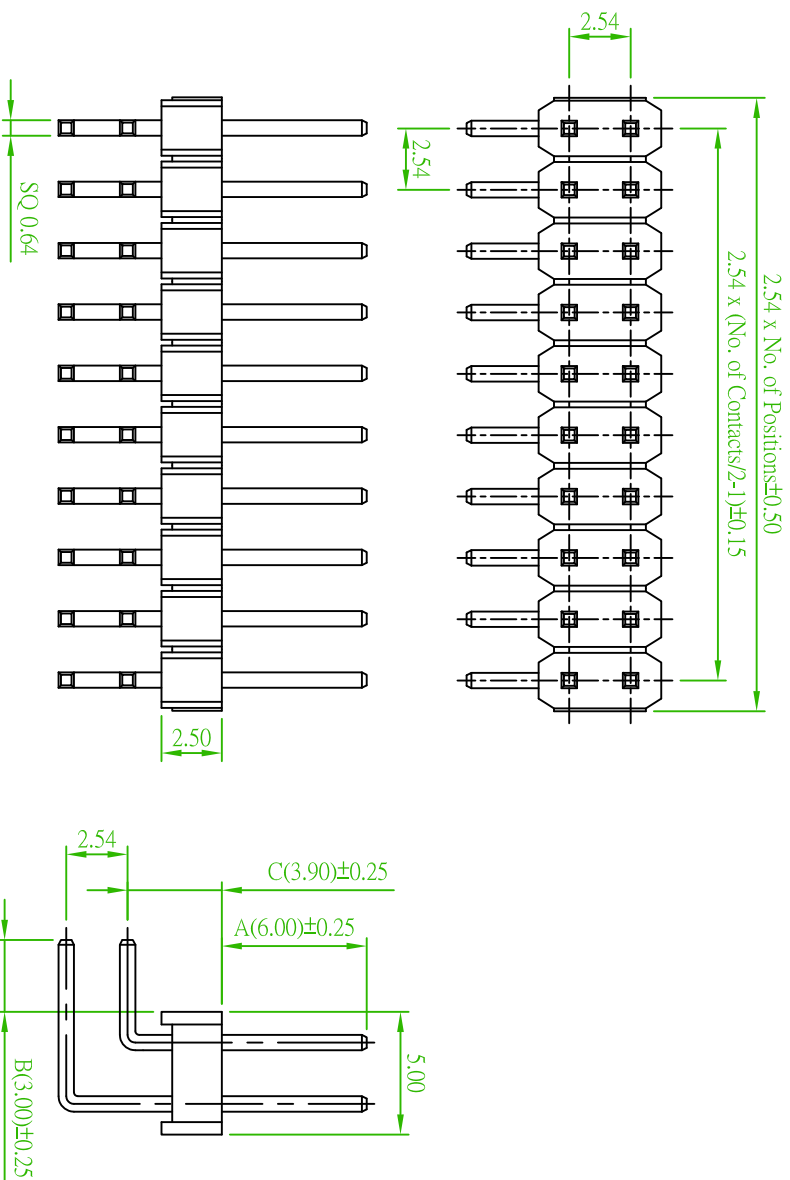

AREA		REV.	DESCRIPTION	DATE
<b>品名</b> TITLE PIN HEADER 2.54mm RIGHT ANGLE TYPE <b>品號</b> PART NO. PH1RD25-2XX-L <b>圖號</b> DRAWING NO. PH1RD25-2XX-L <b>客戶品號</b> CUSTOMER P/N <b>公差</b> TOLERANCE .X ±0.35 .XX ±0.25				
耀德精密有限公司 Amtek Technology Co., Ltd. TEL:86-24268-8833 FAX:86-24268-8835		<b>版本</b> REV. A <b>比例</b> SCALE FREE <b>單位</b> UNIT mm	<b>日期</b> DATE 2012/04/10 <b>繪圖</b> DRAWN Joe <b>核對</b> CHECKED <b>核准</b> APPROVED James	