




## Pin Header 2.0mm 1 Row H=1.5/2.0mm Straight Type

### SPECIFICATION

Current Rate:1.5 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C




### MATERIAL

Insulator:Polyester,UL 94V-0  
 ©Standard:PBT or Nylon 6T  
 Contact Pin:Copper Alloy  
 Contact Plating:Gold Flash all over

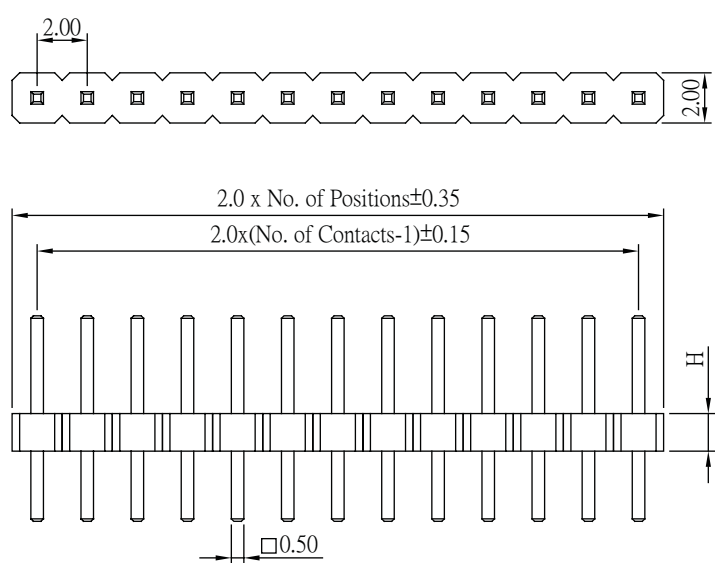

Part No.:PH2S15/20-1XX-L/U

## Pin Header 2.0mm 2 Row H=1.5/2.0mm Straight Type

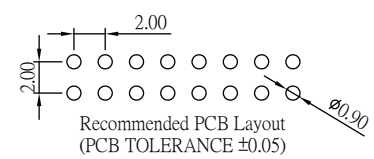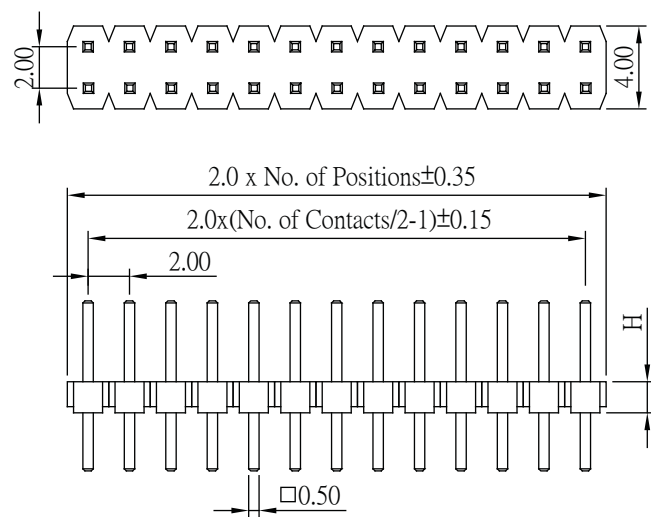

Part No.:PH2S15/20-2XX-L/U

## ORDER INFORMATION

