


Electret Condenser Microphone


KPCM - 27B , KPCM - 27B - P (6.0X2.7)

UNIT:mm

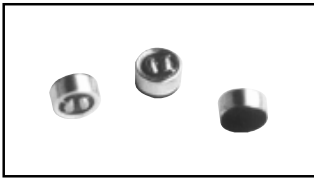

Dimensions

Lead Wire Type KPCM - 27B PCB Type KPCM - 27B - P

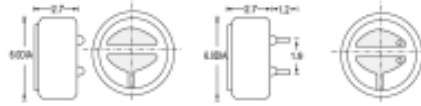


Specifications


Sensitivity	:See Model No. Table
Impedance	:2.2K Ω Max
Standard Power Supply	:2.0V DC
Current Consumption	:0.5mA Max
Sensitivity Reduction	:within-3dB at 1.0V
S/N Ratio	:more than 60dB
Directivity	:Omnidirectional

Sensitivity (0dB=1v/ub at 1kHz)	Sensitivity show method
-70 $\frac{1}{2}$ dB	As 1 pa=10ub, therefore when it be pa or ub showed, there would be -20ub distance between them.
-68 $\frac{1}{2}$ dB	
-66 $\frac{1}{2}$ dB	For examples:
-64 $\frac{1}{2}$ dB	-40dB(0dB=1v/pa)sequivalentto
-62 $\frac{1}{2}$ dB	-60dB(0dB=1v/ub)
-60 $\frac{1}{2}$ dB	
-58 $\frac{1}{2}$ dB	

Schematic

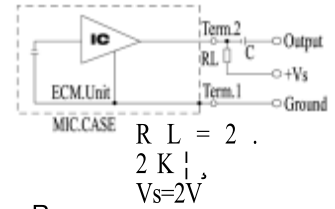


Frequency Response

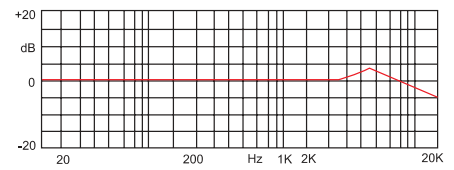


KPCM - 6B , KPCM - 6B- P (6.0X5.2)

UNIT:mm

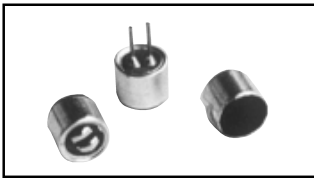

Dimensions

Lead Wire Type KPCM - 6B PCB Type KPCM - 6B-P




Specifications


Sensitivity	:See Model No. Table
Impedance	:2.2K Ω Max
Standard Power Supply	:2.0V DC
Current Consumption	:0.5mA Max
Sensitivity Reduction	:within-3dB at 1.0V
S/N Ratio	:more than 60dB
Directivity	:Omnidirectional

Sensitivity (0dB=1v/ub at 1kHz)	Sensitivity show method
-70 $\frac{1}{2}$ dB	As 1 pa=10ub, therefore when it be pa or ub showed, there would be -20ub distance between them.
-68 $\frac{1}{2}$ dB	
-66 $\frac{1}{2}$ dB	For examples:
-64 $\frac{1}{2}$ dB	-40dB(0dB=1v/pa)sequivalentto
-62 $\frac{1}{2}$ dB	-60dB(0dB=1v/ub)
-60 $\frac{1}{2}$ dB	
-58 $\frac{1}{2}$ dB	

Schematic

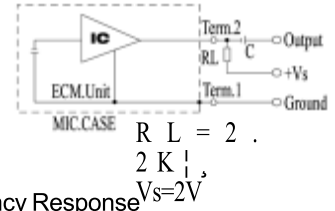


Frequency Response

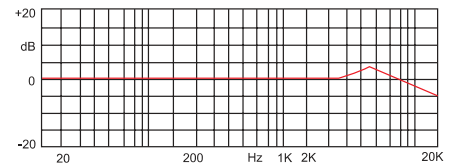


KPCM - 29B , KPCM - 29B - P (9.7X4.5)

UNIT:mm

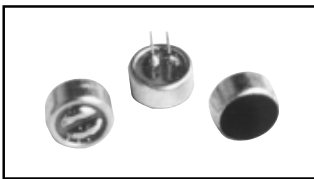

Dimensions

Lead Wire Type KPCM - 29B PCB Type KPCM - 29B - P

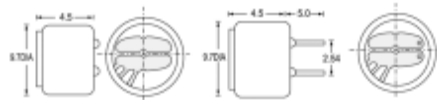


Specifications


Sensitivity	:See Model No. Table
Impedance	:2.2K Ω Max
Standard Power Supply	:4.5V DC
Current Consumption	:0.5mA Max
Sensitivity Reduction	:within-3dB at 3V
S/N Ratio	:more than 60dB
Directivity	:Omnidirectional

Sensitivity (0dB=1v/ub at 1kHz)	Sensitivity show method
-66 $\frac{1}{2}$ dB	As 1 pa=10ub, therefore when it be pa or ub showed, there would be -20ub distance between them.
-64 $\frac{1}{2}$ dB	
-62 $\frac{1}{2}$ dB	For examples:
-60 $\frac{1}{2}$ dB	-40dB(0dB=1v/pa)sequivalentto
-58 $\frac{1}{2}$ dB	-60dB(0dB=1v/ub)
-56 $\frac{1}{2}$ dB	

Schematic

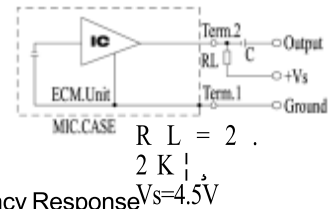

Frequency Response

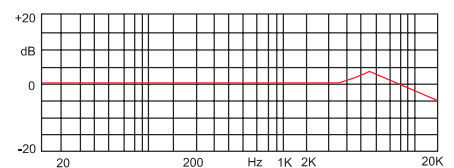

The information contained herein is believed to be correct, but no guarantee for accuracy, completeness. KEPO Electronics Ltd. reserves the right to make changes without notification.