

## Female Header 2.0mm Bottom Entry SMT / SMT Type


### Specifications

Current Rate: 2 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C


### Material

Insulator: Hi-Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated

## ORDER INFORMATION

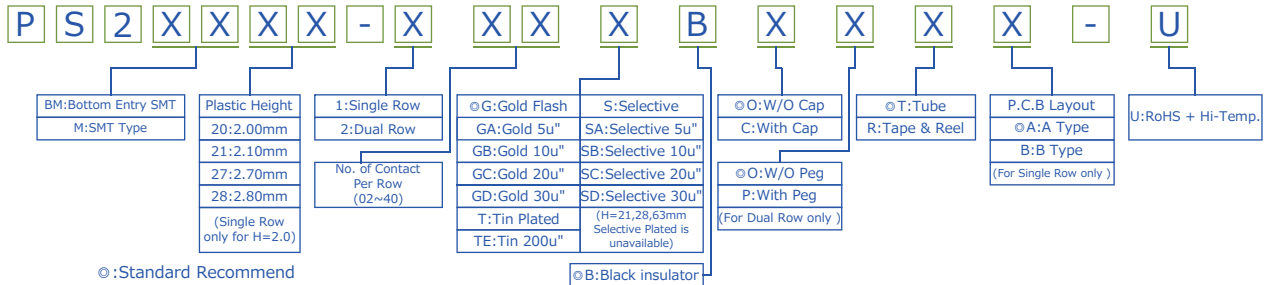


## Female Header 2.0mm 1 & 2 Row H=2.0/2.7mm Bottom Entry SMT Type

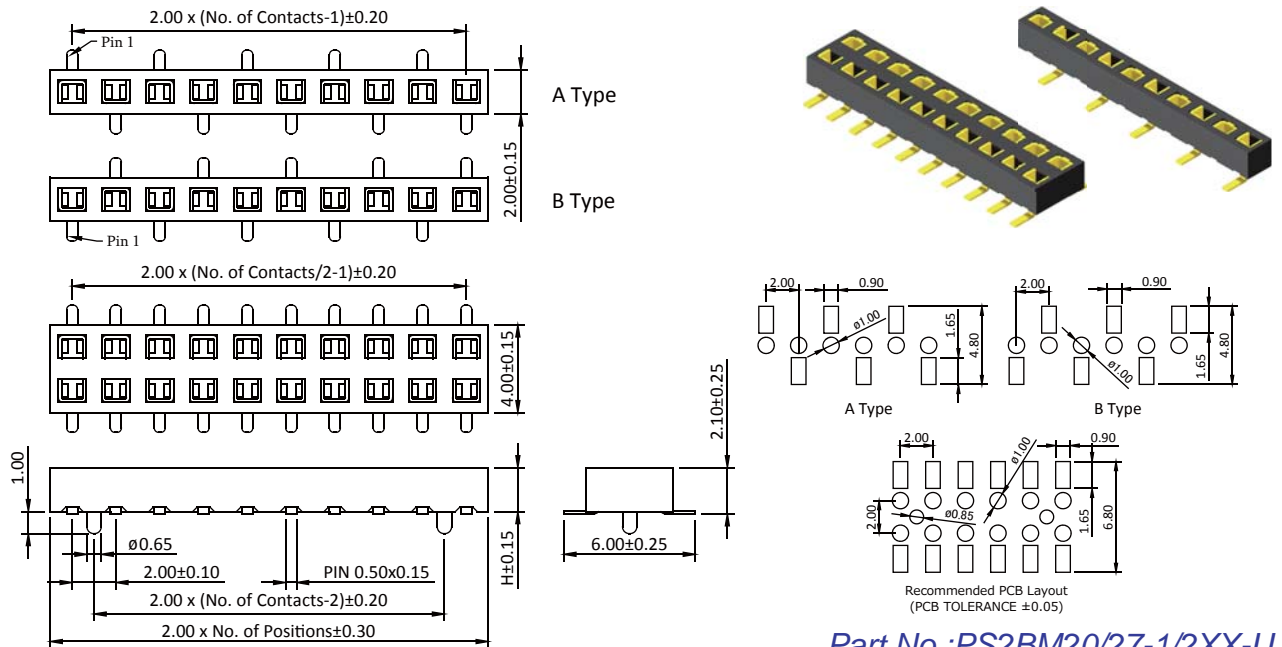

Part No.: PS2BM20/27-1/2XX-U

## Female Header 2.0mm 2 Row H=2.1/2.8mm SMT Type

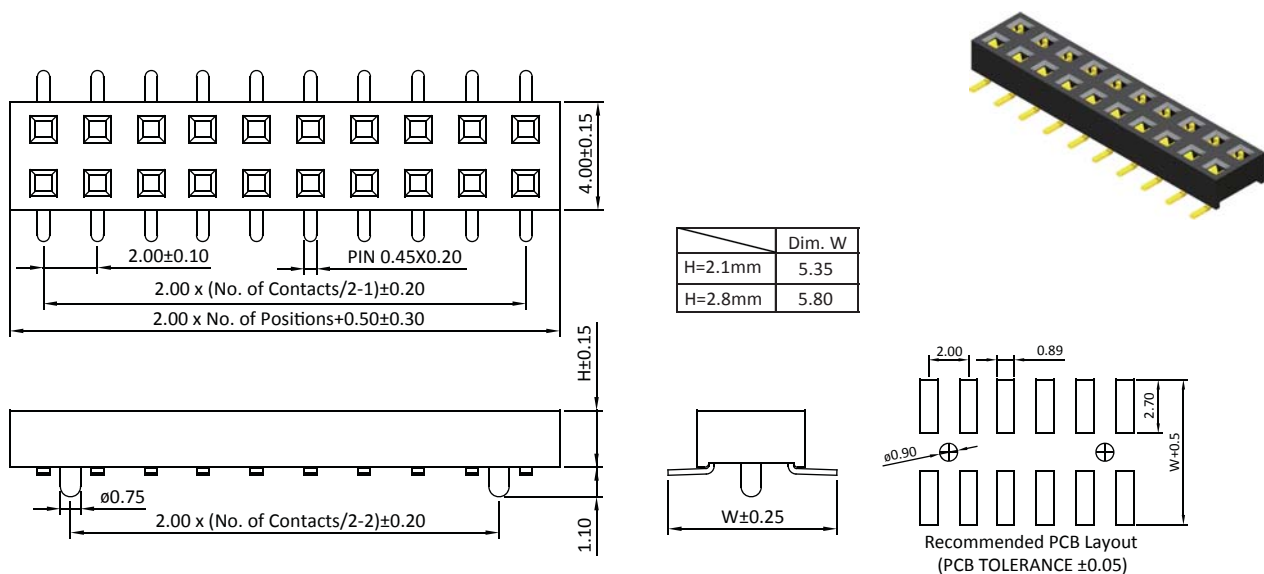

Part No.: PS2M21/28-2XX-U