


REV.	DESCRIPTION	DATE
A	RELEASE	May 08, 2002
B	DRAW MODIFY	Nov. 11, 2002
C	RoHS MODIFY	Feb. 17, 2005
D	DRAW MODIFY	Oct. 18, 2006
E	DRAW MODIFY	Jan. 16, 2007

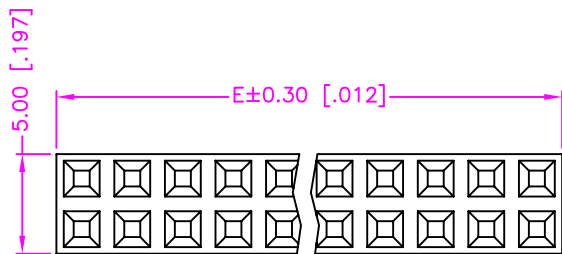

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 0.66$$

$$(\text{NO. OF POSITION PER ROW}) \times 1.00 + .026$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 1.00$$





MATERIALS

1. HOUSING : P.B.T (UL 94V-0), BLACK.
2. TERMINAL : BRASS. (t=0.64mm)
3. STRIP : P.B.T, BLACK.

SPECIFICATION

1. CURRENT RATING : 3 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
4. CONTACT RESISTANCE : 30m OHMS MAX.
5. OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :

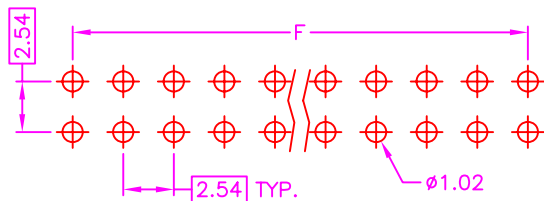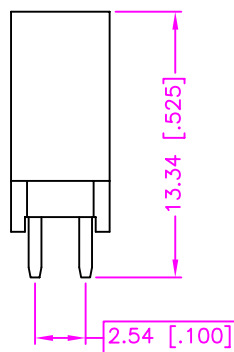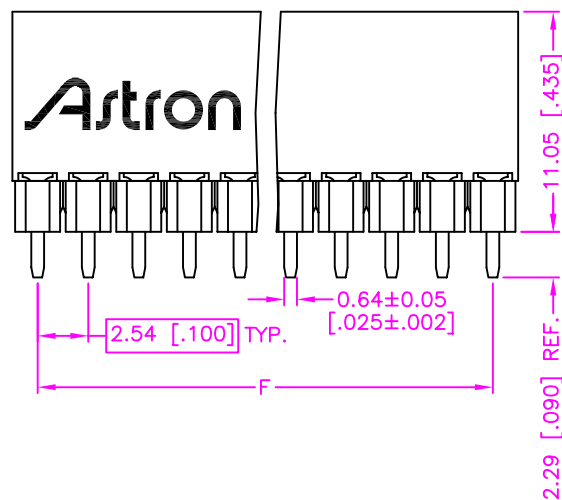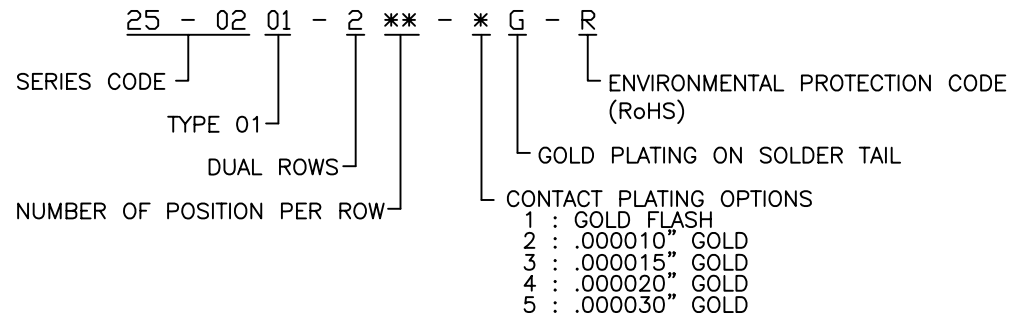

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE .0=±0.30 [0.012] .00=±0.20 [0.008] .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>NGKKJ</i>	Astron WWW.ASTRON.COM.TW
CHECK <i>B&N</i>		APP'D <i>ERJE</i>	
UNITS : mm [inch]		PRODUCT SPEC. 203-0009 C341-2005	NAME POST HEADER RECEPTACLE 2.54mm PITCH, P.C.B. MOUNT VERTICAL, ELEVATED TYPE
SCALE NONE	SIZE A4	SHEET 1 OF 1	DRAW NO. C25-0201-2XX-XG-R
		REV. E	(A)