

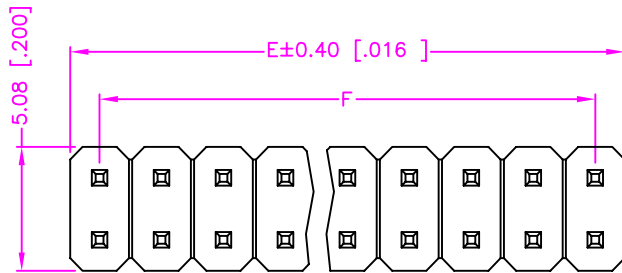
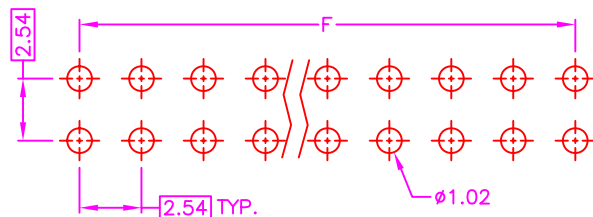


REV.	DESCRIPTION	DATE
A	RELEASE	Sep. 20, 2001
B	RoHS MODIFY	Jul. 25, 2005
C		

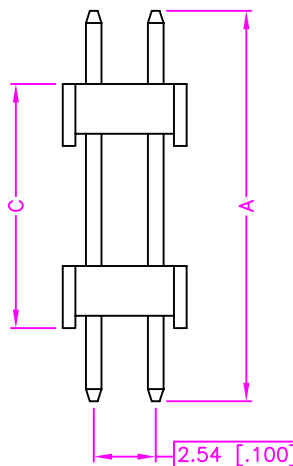

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.54$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$$

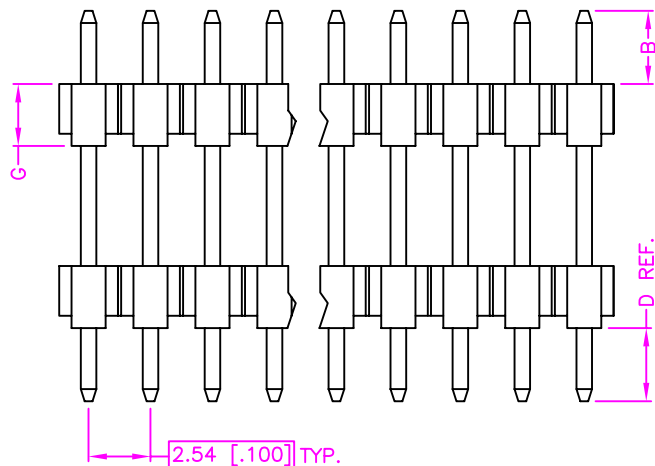

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

- HOUSING : P.B.T (UL 94V-0), BLACK.
- TERMINAL : S.Q. 0.64mm BRASS.

SPECIFICATION



- CURRENT RATING : 3 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
- OPERATING TEMPERATURE : -55°C TO +105°C.

ORDER INFORMATION :


27 - 02 ** - 2 ** - * G - R

SERIES CODE | LENGTH OPTIONS (REF. DRAW NO. C331-2013) | DUAL ROWS | NUMBER OF POSITION PER ROW | ENVIRONMENTAL PROTECTION CODE (RoHS) | GOLD PLATING ON SOLDER TAIL | CONTACT PLATING OPTIONS

CONTACT PLATING OPTIONS:
 1 : GOLD FLASH (STANDARD)
 2 : .000010" GOLD
 3 : .000015" GOLD
 5 : .000030" GOLD


TOLERANCE		DRAWER		 WWW.ASTRON.COM.TW
.0=±0.30 [.012]		ANY		
.00=±0.20 [.008]		CHECK		
.000=±.XXX		FUDY		
.0000=±.		APP'D		NAME POST HEADER 2.54mm PITCH, P.C.B. MOUNT VERTICAL, ELEVATE TYPE
ANG.=±3°		ERFB		
		PRODUCT SPEC.		DRAW NO. C27-02XX-2XX-XG-R
UNITS : mm [inch]		C331-2011		
SCALE NONE	SIZE A4	SHEET 1 OF 1	REV. B	05005

TYPE	A	B	C	D	G	DATE	NOTE
01	21.00[.827]	2.46[.097]	10.16[.400]	8.38[.330]	2.54[.100]	Sep. 20, 2001	
02	9.43[.371]	0.00[.000]	5.08[.200]	4.35[.171]	2.54[.100]	Sep. 20, 2001	
03	19.00[.748]	4.85[.191]	11.00[.433]	3.15[.124]	2.54[.100]	Sep. 20, 2001	SEE NOTE 1
04	16.00[.630]	5.84[.230]	7.62[.300]	2.54[.100]	2.54[.100]	Sep. 20, 2001	SEE NOTE 1
05	20.60[.811]	8.60[.339]	8.98[.354]	3.02[.119]	2.54[.100]	Sep. 20, 2001	
06	17.00[.669]	6.00[.236]	8.00[.315]	3.00[.118]	2.54[.100]	Sep. 20, 2001	
07	22.00[.866]	8.60[.339]	10.40[.409]	3.00[.118]	2.54[.100]	Sep. 20, 2001	
08	17.00[.669]	7.40[.291]	6.60[.260]	3.00[.118]	2.54[.100]	Sep. 20, 2001	
09	18.00[.709]	3.00[.118]	9.00[.354]	6.00[.236]	2.54[.100]	Sep. 20, 2001	
10	26.00[1.024]	6.30[.248]	13.40[.528]	6.30[.248]	2.54[.100]	Sep. 20, 2001	
11	35.00[1.378]	8.00[.315]	24.00[.945]	3.00[.118]	2.54[.100]	Sep. 20, 2001	
12	21.40[.843]	8.00[.315]	10.40[.409]	3.00[.118]	2.54[.100]	Sep. 20, 2001	
13	16.55[.652]	6.05[.238]	7.40[.291]	3.10[.122]	2.54[.100]	Sep. 20, 2001	
14	28.70[1.130]	3.00[.118]	19.20[.756]	6.50[.256]	2.54[.100]	Sep. 20, 2001	
15	14.00[.551]	6.00[.236]	5.50[.217]	2.50[.098]	2.54[.100]	Sep. 20, 2001	
16	23.00[.906]	5.70[.224]	14.60[.575]	2.70[.106]	2.54[.100]	Sep. 20, 2001	
17	38.00[1.496]	6.10[.240]	25.80[1.016]	6.10[.240]	2.54[.100]	Sep. 20, 2001	SEE NOTE 1
18	18.54[.730]	6.35[.250]	8.89[.350]	3.30[.130]	2.54[.100]	Sep. 20, 2001	SEE NOTE 1
19	15.50[.610]	3.00[.118]	9.50[.374]	3.00[.118]	2.54[.100]	Sep. 20, 2001	
20	20.40[.803]	2.91[.115]	14.58[.574]	2.91[.115]	2.54[.100]	Sep. 20, 2001	
21	46.00[1.811]	3.00[.118]	40.00[1.575]	3.00[.118]	2.54[.100]	Sep. 20, 2001	SEE NOTE 1
22	14.08[.554]	6.00[.236]	5.08[.200]	3.00[.118]	2.54[.100]	Sep. 20, 2001	
23	18.00[.709]	7.30[.287]	7.70[.303]	3.00[.118]	2.54[.100]	Sep. 20, 2001	
24	31.00[1.220]	8.00[.315]	20.00[.787]	3.00[.118]	2.54[.100]	Sep. 20, 2001	
25	11.60[.457]	3.52[.139]	5.08[.200]	3.00[.118]	2.54[.100]	Mar. 20, 2002	
26	17.90[.705]	5.40[.213]	9.40[.370]	3.10[.122]	2.54[.100]	Jul. 09, 2002	
27	35.00[1.378]	3.46[.136]	28.08[1.106]	3.46[.136]	2.54[.100]	Oct. 01, 2002	
28	26.40[1.039]	8.00[.315]	14.40[.567]	4.00[.157]	2.54[.100]	Oct. 14, 2002	
29	35.00[1.378]	13.50[.531]	18.00[.709]	3.50[.138]	2.54[.100]	Nov. 25, 2002	
30	24.00[.945]	6.00[.236]	15.00[.591]	3.00[.118]	2.54[.100]	May. 07, 2003	




NOTE 1

FOR DRAW NO. : C331-2010
C331-2011
C331-2012



TOLERANCE .0=±.X .00=±.XX .000=±.XXX .0000=±. ANG.=±3'		DRAWER <i>RUS</i>		Astron WWW.ASTRON.COM.TW
CHECK <i>Katherlin</i>		APP'D <i>ALX</i>		
PRODUCT SPEC. ---		DRAW NO. C331-2013-1		
UNITS : mm [inch]	SCALE NONE	SIZE A4	SHEET 2 OF 1	REV.

TYPE	A	B	C	D	G	DATE	NOTE
31	13.46[.530]	5.59[.220]	5.08[.200]	2.79[.110]	2.54[.100]	Jul. 22, 2003	
32	33.78[1.330]	6.73[.265]	20.57[.810]	6.48[.255]	2.54[.100]	Aug. 27, 2003	
33	31.24[1.230]	5.71[.225]	19.05[.750]	6.48[.255]	2.54[.100]	Aug. 27, 2003	
34	26.00[1.024]	7.00[.276]	16.00[.630]	3.00[.118]	2.54[.100]	Oct. 27, 2003	
35	19.00[.748]	6.00[.236]	10.00[.394]	3.00[.118]	2.54[.100]	Mar. 25, 2004	
36	24.00[.945]	5.50[.217]	15.50[.610]	3.00[.118]	2.54[.100]	Jun. 29, 2004	
37	16.00[.630]	6.60[.260]	6.60[.260]	2.80[.110]	2.54[.100]	Nov. 04, 2004	
38	22.50[.886]	6.00[.236]	13.60[.535]	2.90[.114]	2.54[.100]	Sep. 22, 2005	
39	28.70[1.130]	6.50[.256]	19.55[.770]	2.65[.104]	2.54[.100]	Nov. 30, 2005	
40							
41							
42							
43							
44							
45							
46							
47							
48							
49							
50							
51							
52							
53							
54							
55							
56							
57							
58							
59							
60							



NOTE 1

FOR DRAW NO. : C331-2010
C331-2011
C331-2012

TOLERANCE .0=±.X .00=±.XX .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>ANY</i>	 WWW.ASTRON.COM.TW
CHECK <i>EVAN</i>		APP'D <i>SRP</i>	
		PRODUCT SPEC. —	DRAW NO. C331-2013-2
UNITS : mm [inch]	SCALE NONE	SIZE A4	SHEET 2 OF 2
		REV.	