


REV.	DESCRIPTION	DATE
A	RELEASE	Sep. 17, 2003
B	DRAW MODIFY	Sep. 04, 2004
C	DRAW MODIFY	Oct. 21, 2004
D	DRAW MODIFY	Sep. 04, 2004
E	RoHS MODIFY	Feb. 04, 2005
F	DRAW MODIFY	Jan. 24, 2007

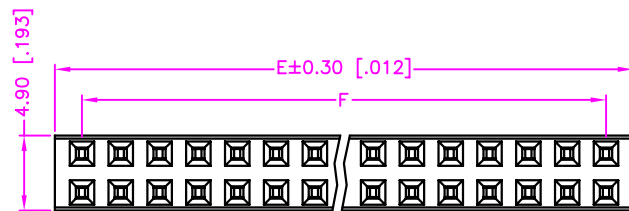

$$E = (\text{NO. OF POSITION PER ROW}) \times 2.54 + 1.02$$


$$(\text{NO. OF POSITION PER ROW}) \times 1.00 + 0.040$$

$$F = (\text{NO. OF POSITION PER ROW} - 1) \times 2.54$$

$$(\text{NO. OF POSITION PER ROW} - 1) \times 1.00$$

$$G = (\text{NO. OF POSITION PER ROW}) \times 2.54$$

$$(\text{NO. OF POSITION PER ROW}) \times 1.00$$

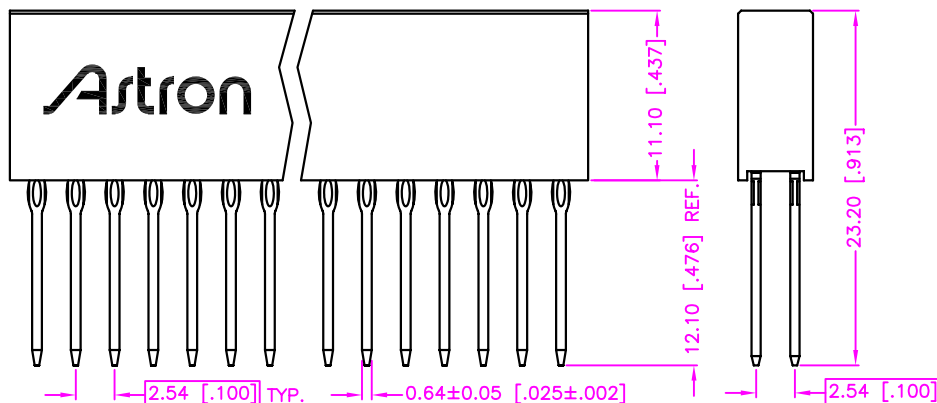





### MATERIALS

- HOUSING : P.P.S (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE. (t=0.60mm)
- STRIP : P.P.S, BLACK.

### SPECIFICATION

- CURRENT RATING : 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 5000M OHMS MIN. AT 1000V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.

### ORDER INFORMATION :

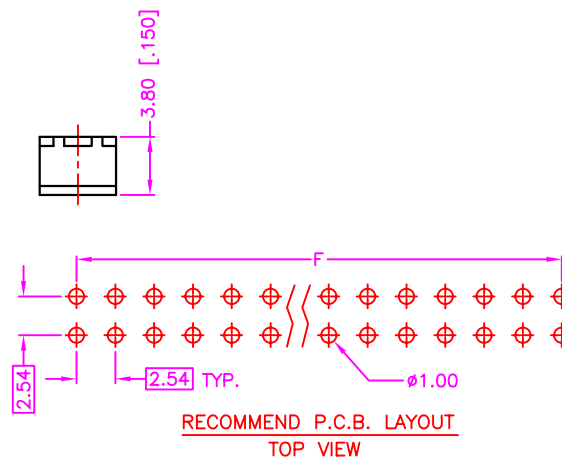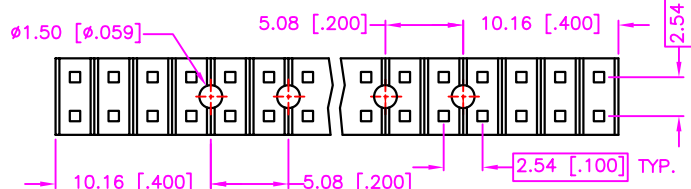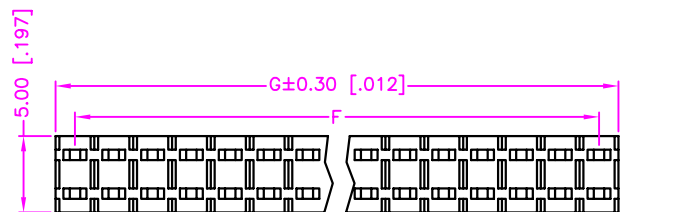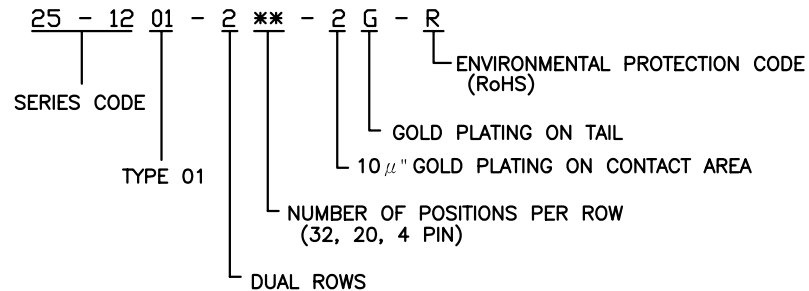

TOLERANCE		DRAWER		 <b>WWW.ASTRON.COM.TW</b>
.0=±0.30 [.012]		B&N		
.00=±0.20 [.008]		CHECK		NAME POST HEADER RECEPTACLE 2.54mm PITCH, P.C.B. MOUNT PRESS FIT TYPE
.000=±.XXX		NFKKJ		
.0000=±.		APP'D		DRAW NO. C25-1201-2XX-2G-R
ANG.=±3°		BRB		
		PRODUCT SPEC.		10018
UNITS : mm [inch]		C349-1001		
SCALE NONE		C349-1002		
SIZE A4		SHEET 1 OF 1		
		REV. F		