
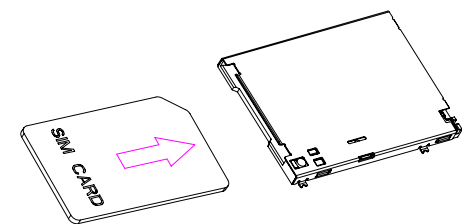
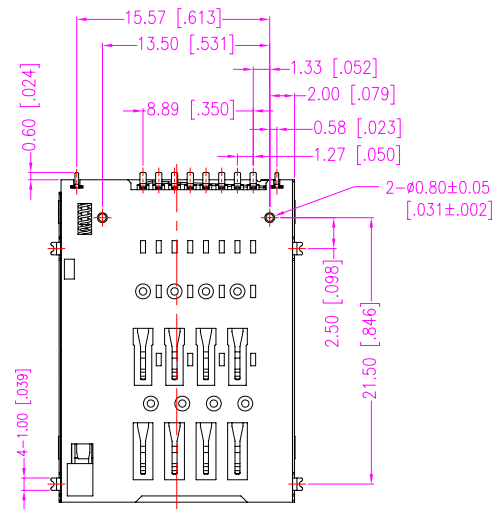


REV.	DESCRIPTION	DATE
A	RELEASE	Mar. 05, 2009

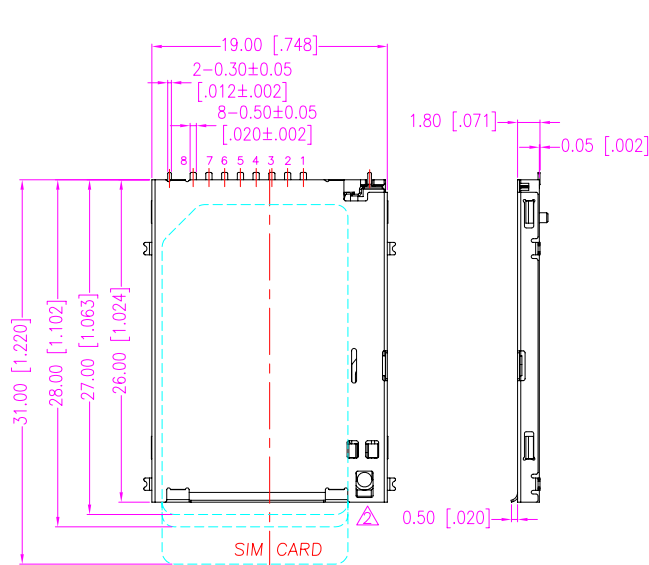



MATERIALS

- HOUSING : L.C.P (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE, (t=0.15mm)
GOLD FLASH PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL,
UNDER NICKEL PLATED OVER ALL.
- SWITCH : PHOSPHOR BRONZE, (t=0.15mm)
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL,
UNDER NICKEL PLATED OVER ALL.
- SPRING : STEEL.
- SHELL : STAINLESS STEEL,
GOLD FLASH PLATED ON SOLDER TAIL.
UNDER NICKEL PLATED OVER ALL.
- CRANK AXLE : STAINLESS STEEL


SPECIFICATION

- CURRENT RATING : 0.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN.
AT 500V DC.
- CONTACT RESISTANCE : 75m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- DURABILITY : 5000 CYCLES.

PART NUMBER INFORMATION :

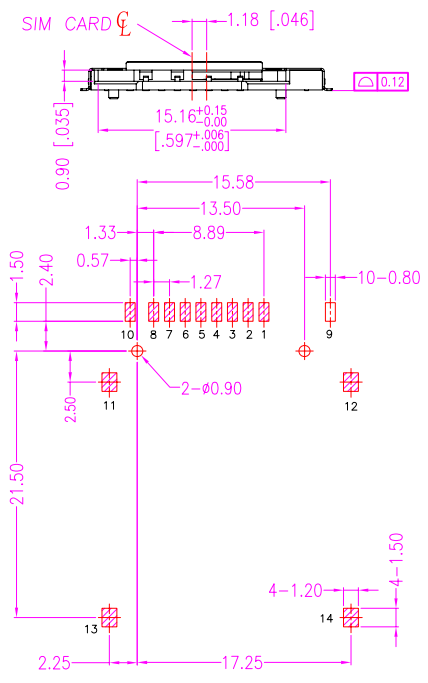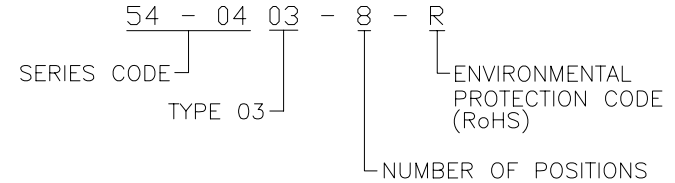

WITHOUT CARD



INSERT CARD

SIM CARD PINOUT	
PIN NO.	PIN ASSIGNMENT
1	GND: PWR SIGNAL AND GND
2	VCC: PWR SIGNAL AND GND
3	VPP: PROGRAMMING VOLTAGE
4	RST: RESET SIGNAL
5	I/O: SERIAL DATA INPUT/OUTPUT
6	CLK: CLOCKING SIGNAL
7	N/A
8	N/A
9	COMMON TERMINAL
10	CARD DETECT SWITCH
11~14	GND

TOLERANCE		DRAWER	
.0=±.25 [0.010]	.00=±.20 [0.008]	JANPE	
.000=±.XXX	.0000=±.	CHECK	
ANG.=±3°		BEN	
		APP'D	
		ERPE	
		PRODUCT SPEC.	
		T-1009	
UNITS : mm [inch]		DRAW NO.	
SCALE NONE	SIZE A4	C54-0403-8-R	
SHEET 1 OF 2	REV. A		



Astron
WWW.ASTRON.COM.TW

NAME: MEMORY CARD
SIM CARD READER CONNECTOR
PUSH - PUSH TYPE
1.27mm PITCH, SMT TYPE


DRAW NO.: C54-0403-8-R

17012

REV.	DESCRIPTION	DATE
A	RELEASE	Mar. 05, 2009

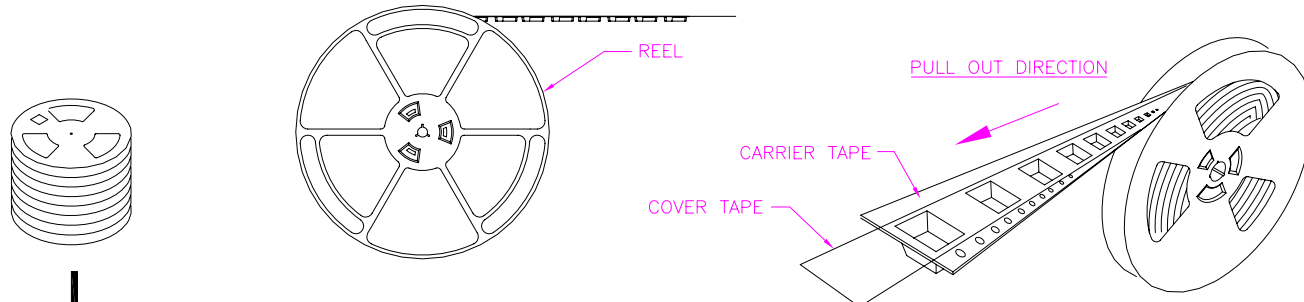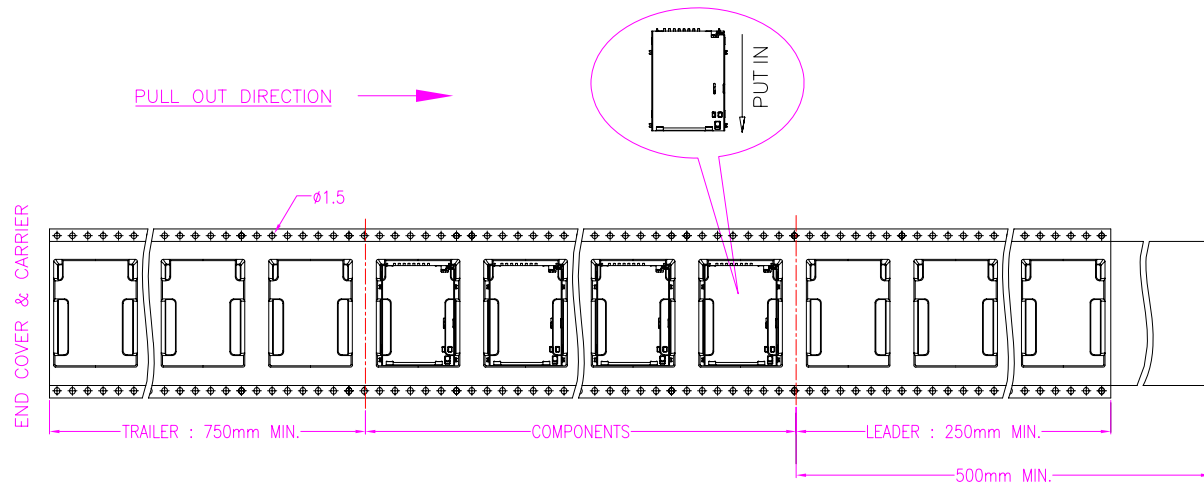

QUANTITY :
 1. 500PCS PER REEL
 2. 3,000PCS/6 REEL PER CARTON

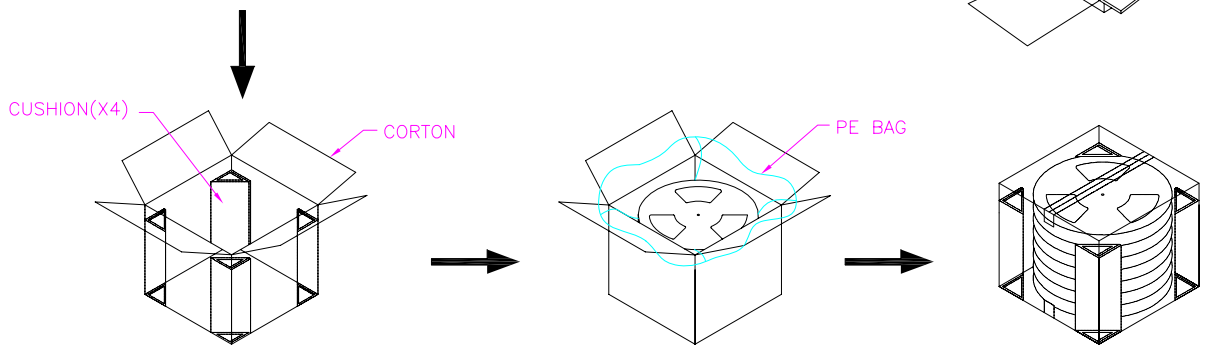

TOLERANCE		DRAWER	
.0=±		JANPE	
.00=±		CHECK	
.000=±		BEN	
.0000=±.		APP'D	
ANG.=±3'		ERPE	
		PRODUCT SPEC.	
UNITS : mm [inch]		T-1009	
SCALE	SIZE	SHEET	REV.
NONE	A4	2 OF 2	A

 WWW.ASTRON.COM.TW		NAME	
		SIM CARD READER CONNECTOR PUSH - PUSH TYPE TAPE & REEL PACKAGE	
DRAW NO.		C54-0403-8-R	
17012			