

# MGA-43428

## High Linearity 851 – 894 MHz Power Amplifier Module



### Data Sheet


#### Description

Avago Technologies' MGA-43428 is a fully matched power amplifier for use in the (851-894) MHz band. High linear output power at 5V is achieved through the use of Avago Technologies' proprietary 0.25um GaAs Enhancement-mode pHEMT process. MGA-43428 is housed in a miniature 5.0mm x 5.0mm molded-chip-on-board (MCOB) module package. A detector is also included on-chip. The compact footprint coupled with high gain, high linearity and good efficiency makes the MGA-43428 an ideal choice as a power amplifier for small cell BTS PA applications.

#### Applications

- Final stage high linearity amplifier for Picocell and Enterprise Femtocell PA targeted for small cell BTS downlink applications.

#### Component Image



TOP VIEW

#### 5.0 x 5.0 x 0.9 mm Package Outline

Note:


Package marking provides orientation and identification

"43428" = Device part number

"YYWW" = year and work week

"XXXX" = assembly lot number

#### Pin Configuration

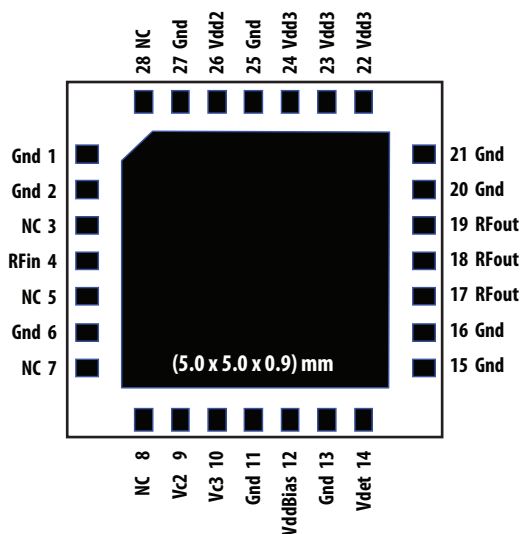

#### Features

- High linearity performance : Max -50dBc ACLR <sup>[1]</sup> at 27.2dBm linear output power (biased on 5V supply)
- High gain : 33.7dB
- Good efficiency
- Fully matched
- Built-in detector
- GaAs E-pHEMT Technology <sup>[2]</sup>
- Low cost small package size: (5.0 x 5.0 x 0.9) mm
- MSL3
- Lead free/Halogen free/RoHS compliance

#### Specifications


880MHz; 5.0V, Idqtotal = 350mA (typ), W-CDMA Test model #1, 64DPCH downlink signal

- PAE : 14.9%
- 27.2dBm linear Pout @ ACLR = -50dBc <sup>[1]</sup>
- 33.7dB Gain
- Detector range : 20dB

Note:

- W-CDMA Test model #1, 64DPCH downlink signal.
- Enhancement mode technology employs positive Vgs, thereby eliminating the need of negative gate voltage associated with conventional depletion mode devices.

#### Functional Block Diagram

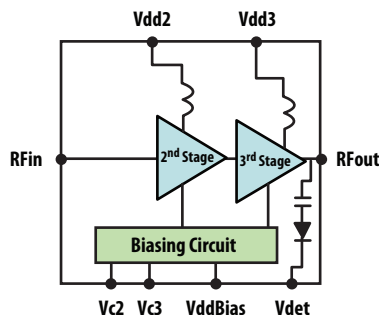

**Attention: Observe precautions for handling electrostatic sensitive devices.**

ESD Machine Model = 80 V

ESD Human Body Model = 400 V

Refer to Avago Application Note A004R:

Electrostatic Discharge, Damage and Control.

**Absolute Maximum Rating**<sup>[1]</sup>  $T_A = 25^\circ\text{C}$ 

| Symbol              | Parameter                              | Units | Absolute Max. |
|---------------------|----------------------------------------|-------|---------------|
| Vdd, VddBias        | Supply voltages, bias supply voltage   | V     | 6             |
| Vc                  | Control Voltage                        | V     | (Vdd)         |
| P <sub>in,max</sub> | CW RF Input Power                      | dBm   | 20            |
| P <sub>diss</sub>   | Total Power Dissipation <sup>[3]</sup> | W     | 4.9           |
| T <sub>j</sub>      | Junction Temperature                   | °C    | 150           |
| T <sub>STG</sub>    | Storage Temperature                    | °C    | -65 to 150    |

**Thermal Resistance**<sup>[2,3]</sup>

$$\theta_{jc} = 13.5^\circ\text{C/W}$$

Notes:

1. Operation of this device in excess of any of these limits may cause permanent damage.
2. Thermal resistance measured using Infra-Red Measurement Technique at Vdd = 5.5 V operating voltage.
3. Board temperature (TB) is 25 °C, for TB > 83.8 °C derate the device power at 74mW per °C rise in Board (package belly) temperature.

**Electrical Specifications**

$T_A = 25^\circ\text{C}$ , Vdd = VddBias = 5.0V, Vc2=Vc3=3V, Idqtotal = 350mA, RF performance at 880MHz, W-CDMA Test model #1, 64DPCH downlink signal operation unless otherwise stated.

| Symbol                  | Parameter and Test Condition                 | Units | Min. | Typ. | Max. |
|-------------------------|----------------------------------------------|-------|------|------|------|
| Vdd                     | Supply Voltage                               | V     | -    | 5.0  | -    |
| Idqtotal                | Quiescent Supply Current                     | mA    | -    | 350  | 560  |
| Gain                    | Gain                                         | dB    | 31   | 33.7 | -    |
| OP1dB                   | Output Power at 1dB Gain Compression         | dBm   | -    | 36.4 | -    |
| ACLR1 @ Pout = 27.2 dBm | W-CDMA Test model #1, 64DPCH downlink signal | dBc   | -    | -50  | -    |
| PAE @ Pout = 27.2 dBm   | Power Added Efficiency                       | %     | 13   | 14.9 | -    |
| S11                     | Input Return Loss, 50 $\Omega$ source        | dB    | -    | 25   | -    |
| DetR                    | Detector RF dynamic range                    | dB    | -    | 20   | -    |

$T_A = 25^\circ\text{C}$ , Vdd = VddBias = 5.5V, Vc2=2.9V, Vc3=2.7V Idqtotal = 345mA, RF performance at 880MHz, W-CDMA Test model #1, 64DPCH downlink signal operation unless otherwise stated.

| Symbol                  | Parameter and Test Condition                 | Units | Typ. |
|-------------------------|----------------------------------------------|-------|------|
| Vdd                     | Supply Voltage                               | V     | 5.5  |
| Idqtotal                | Quiescent Supply Current                     | mA    | 345  |
| Gain                    | Gain                                         | dB    | 33.7 |
| OP1dB                   | Output Power at 1dB Gain Compression         | dBm   | 37.0 |
| ACLR1 @ Pout = 27.9 dBm | W-CDMA Test model #1, 64DPCH downlink signal | dBc   | -50  |
| PAE @ Pout = 27.9 dBm   | Power Added Efficiency                       | %     | 15   |
| S11                     | Input Return Loss, 50 $\Omega$ source        | dB    | 25   |
| DetR                    | Detector RF dynamic range                    | dB    | 20   |

## Product Consistency Distribution Charts<sup>[1]</sup>

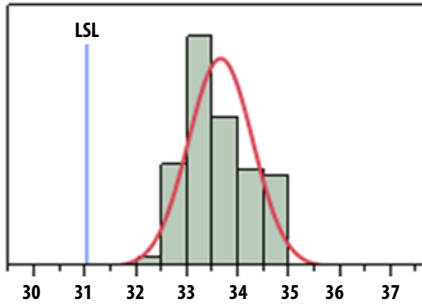


Figure 1. Gain at Pout=27.2dBm, LSL=31dB, nominal = 33.7dB

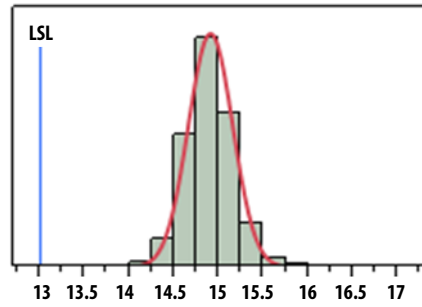


Figure 2. PAE at Pout=27.2dBm, LSL=13%, nominal = 14.9%

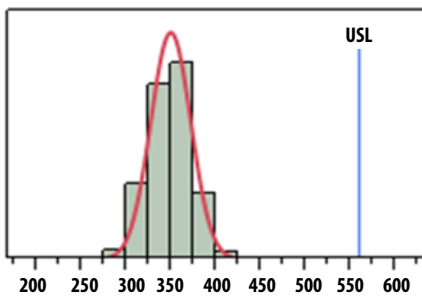


Figure 3. Idqtotal, Nominal = 350mA, USL=560mA

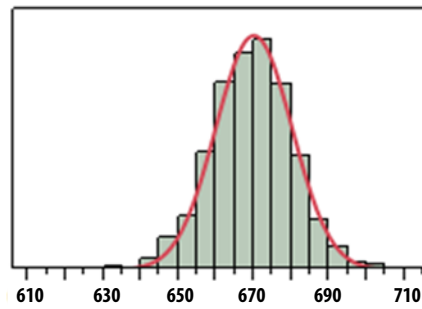


Figure 4. Idd\_Total at Pout=27.2dBm, nominal = 670mA

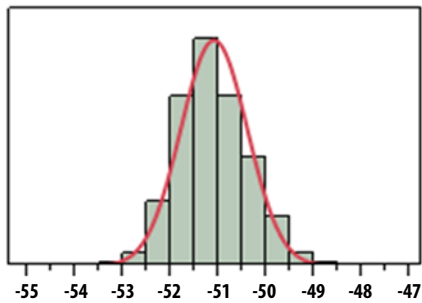


Figure 5. ACLR1 at Pout=27.2dBm, nominal = -51.1dBc

Note:

1. Distribution data sample size is 1500 samples taken from 3 different wafer lots.  $T_A = 25^\circ\text{C}$ ,  $V_{dd} = V_{ddBias} = 5.0\text{V}$ ,  $V_{c2} = V_{c3} = 3\text{V}$ , RF performance at 880MHz unless otherwise stated. Future wafers allocated to this product may have nominal values anywhere between the upper and lower limits.

MGA-43428 typical over-temperature performance at  $V_{c2}=V_{c3}=3V$  ( $V_{dd}=V_{ddBias}=5V$ ) as shown in Figure 35 and  $V_{c2}=2.9V$ ,  $V_{c3}=2.7V$  ( $V_{dd}=V_{ddBias}=5.5V$ ) unless otherwise stated.

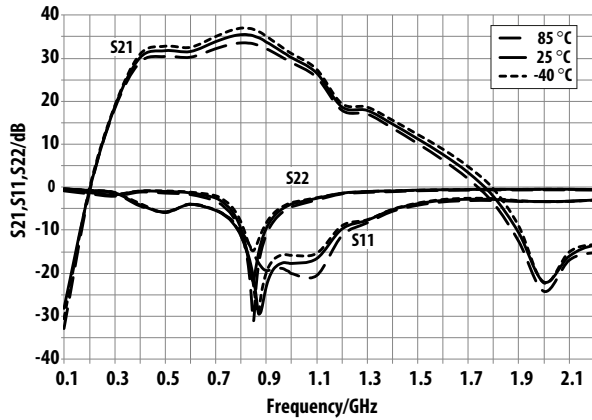


Figure 6. Small-signal performance Over-temperature  $V_{dd}=V_{ddBias}=5.0V$  operating voltage

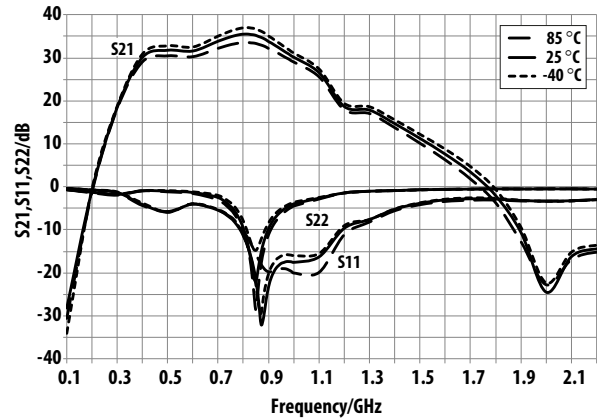


Figure 7. Small-signal performance Over-temperature  $V_{dd}=V_{ddBias}=5.5V$  operating voltage

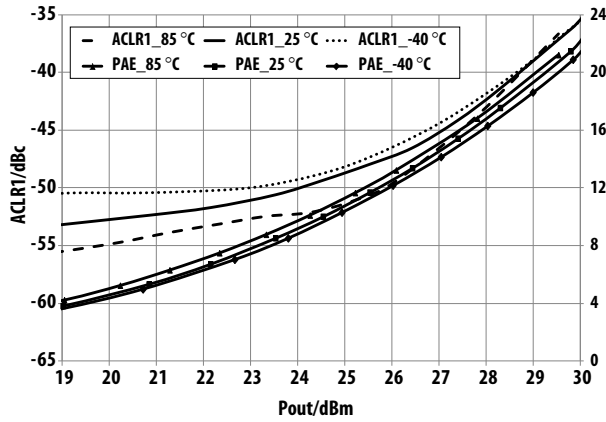


Figure 8. Over-temperature ACLR1, PAE vs Pout @ 851MHz  $V_{dd}=V_{ddBias}=5.0V$  operating voltage

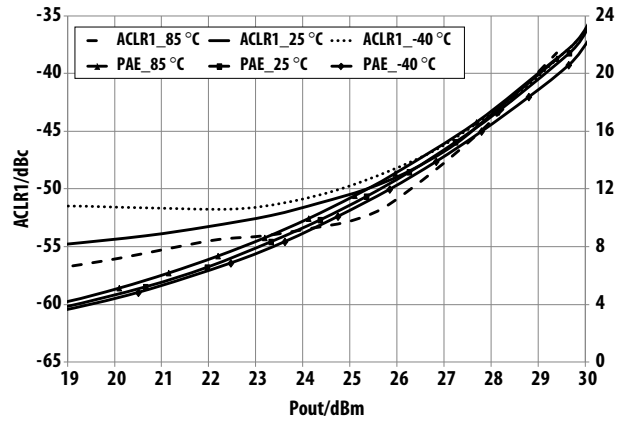


Figure 9. Over-temperature ACLR1, PAE vs Pout @ 859MHz  $V_{dd}=V_{ddBias}=5V$  operating voltage

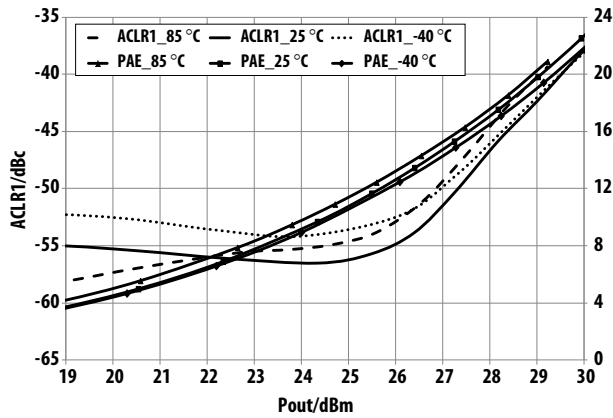


Figure 10. Over-temperature ACLR1, PAE vs Pout @ 869MHz  $V_{dd}=V_{ddBias}=5.0V$  operating voltage

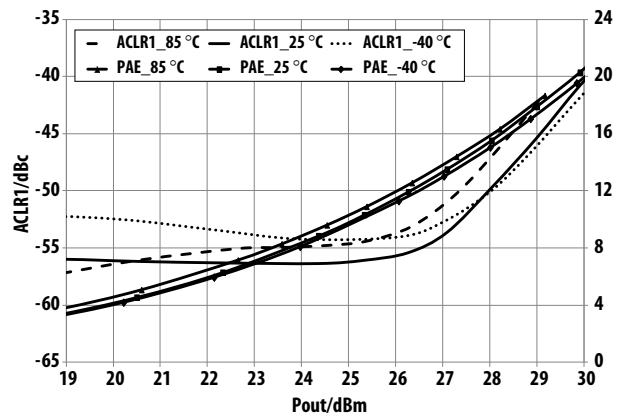


Figure 11. Over-temperature ACLR1, PAE vs Pout @ 869MHz  $V_{dd}=V_{ddBias}=5.5V$  operating voltage

MGA-43428 typical over-temperature performance at  $V_{c2}=V_{c3}=3V$  ( $V_{dd}=V_{ddBias}=5V$ ) as shown in Figure 35 and  $V_{c2}=2.9V$ ,  $V_{c3}=2.7V$  ( $V_{dd}=V_{ddBias}=5.5V$ ) unless otherwise stated.

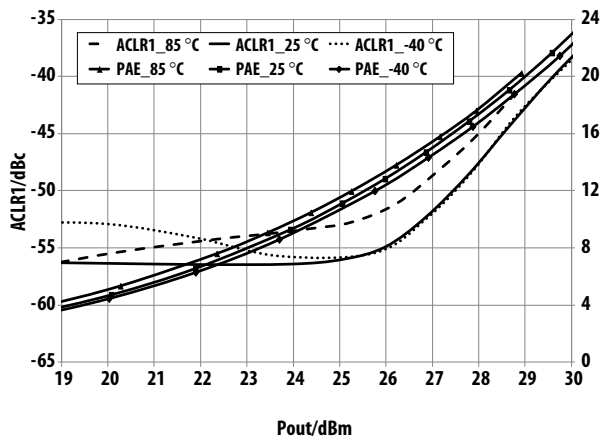


Figure 12. Over-temperature ACLR1, PAE vs Pout @ 880MHz  
 $V_{dd}=V_{ddBias}=5.0V$  operating voltage

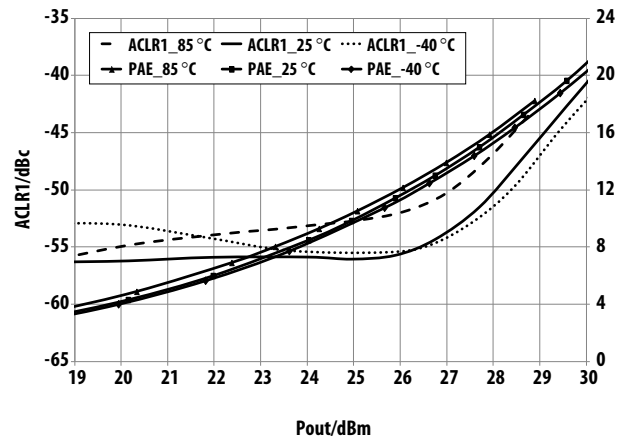


Figure 13. Over-temperature ACLR1, PAE vs Pout @ 880MHz  
 $V_{dd}=V_{ddBias}=5.5V$  operating voltage

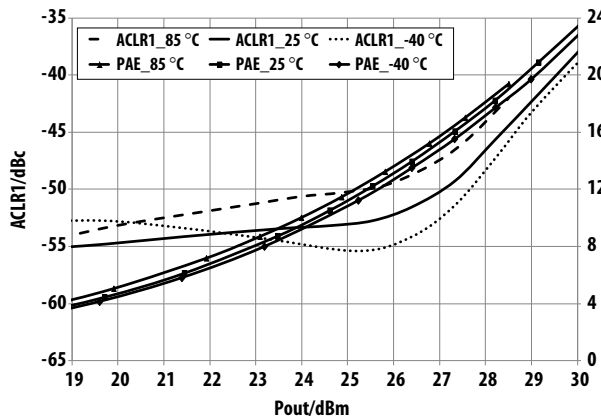


Figure 14. Over-temperature ACLR1, PAE vs Pout @ 894MHz  
 $V_{dd}=V_{ddBias}=5.0V$  operating voltage

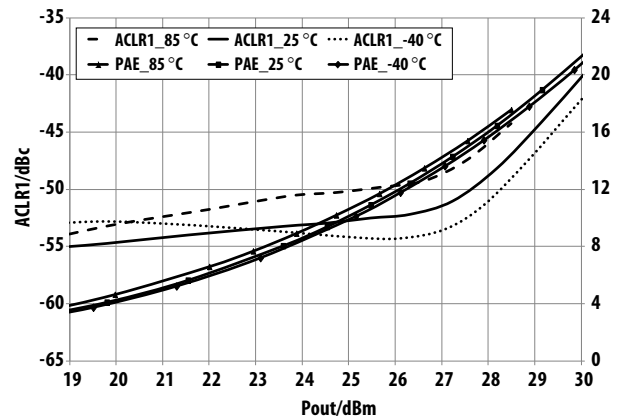


Figure 15. Over-temperature ACLR1, PAE vs Pout @ 894MHz  
 $V_{dd}=V_{ddBias}=5.5V$  operating voltage

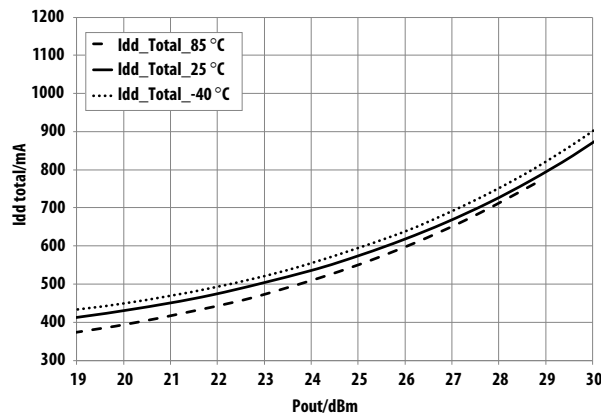


Figure 16. Over-temperature Idd\_Total vs Pout @ 880MHz  
 $V_{dd}=V_{ddBias}=5.0V$  operating voltage

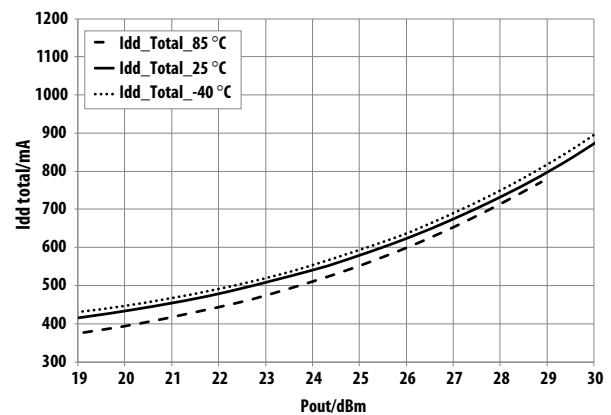


Figure 17. Over-temperature Idd\_Total vs Pout @ 880MHz  
 $V_{dd}=V_{ddBias}=5.5V$  operating voltage

MGA-43428 typical over-temperature performance at  $V_{c2}=V_{c3}=3V$  ( $V_{dd}=V_{ddBias}=5V$ ) as shown in Figure 35 and  $V_{c2}=2.9V$ ,  $V_{c3}=2.7V$  ( $V_{dd}=V_{ddBias}=5.5V$ ) unless otherwise stated.

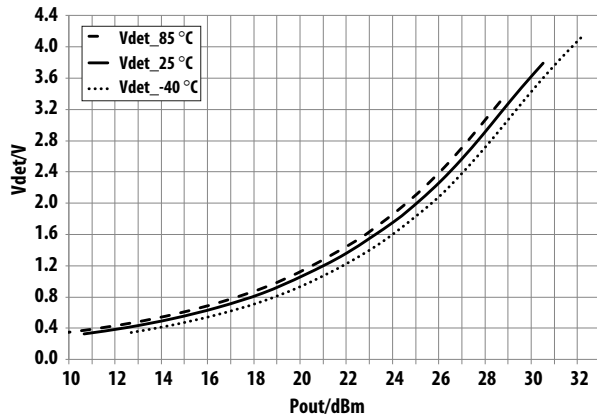


Figure 18. Over-temperature Vdet vs Pout @ 880MHz  
 $V_{dd}=V_{ddBias}=5.0V$  operating voltage

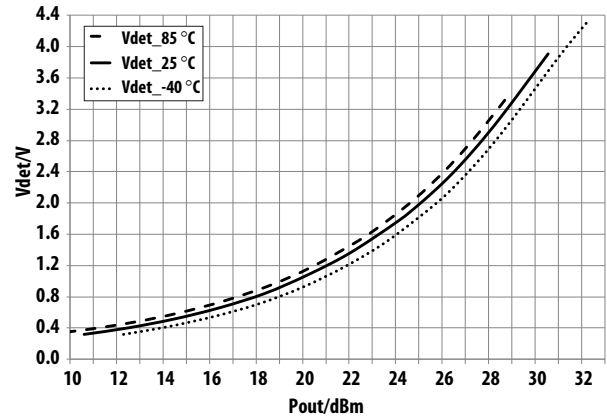


Figure 19. Over-temperature Vdet vs Pout @ 880MHz  $V_{dd}=V_{ddBias}=5.5V$  operating voltage

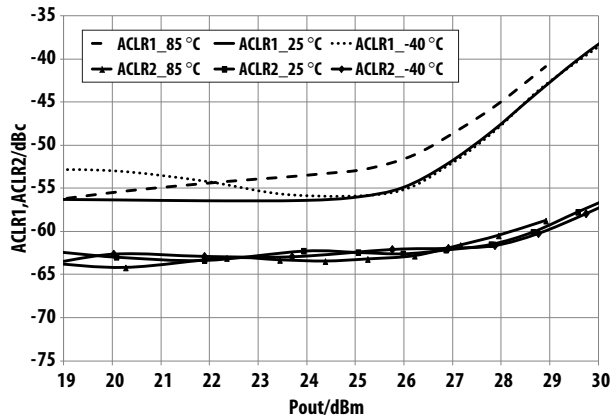


Figure 20. Over-temperature ACLR1, ACLR2/dBc vs Pout @ 880MHz  
 $V_{dd}=V_{ddBias}=5.0V$  operating voltage

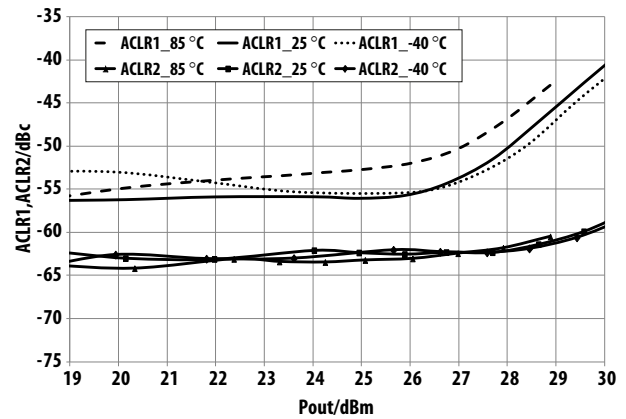


Figure 21. Over-temperature ACLR1, ACLR2/dBc vs Pout @ 880MHz  
 $V_{dd}=V_{ddBias}=5.5V$  operating voltage

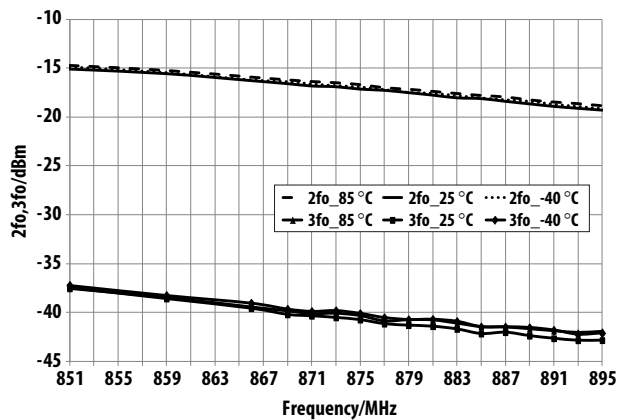


Figure 22. Over-temperature 2nd, 3rd Harmonics vs Freq at  $P_{out}=27.2dBm$ ,  
 $V_{dd}=V_{ddBias}=5.0V$  operating voltage

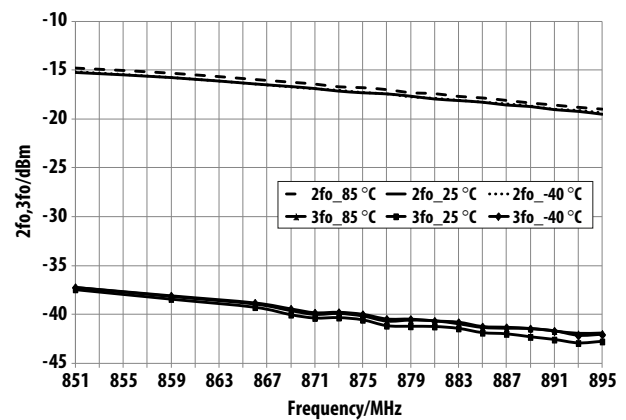


Figure 23. Over-temperature 2nd, 3rd Harmonics vs Freq at  $P_{out}=27.2dBm$ ,  
 $V_{dd}=V_{ddBias}=5.5V$  operating voltage

MGA-43428 typical over-temperature performance at  $V_{c2}=V_{c3}=3V$  ( $V_{dd}=V_{ddBias}=5V$ ) as shown in Figure 35 and  $V_{c2}=2.9V$ ,  $V_{c3}=2.7V$  ( $V_{dd}=V_{ddBias}=5.5V$ ) unless otherwise stated.

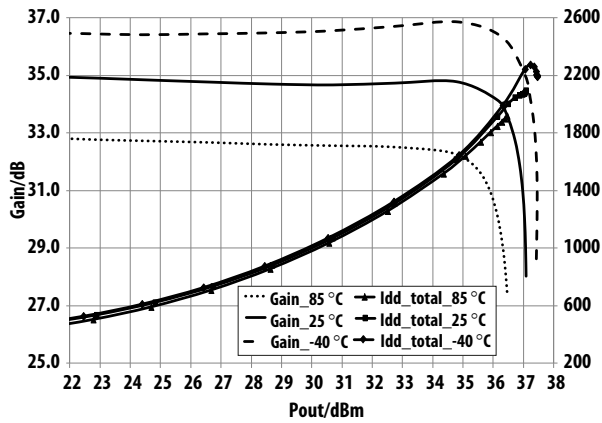


Figure 24. Over-temperature Gain, Idd\_Total vs Pout @ 851MHz  
 $V_{dd}=V_{ddBias}=5.0V$  operating voltage

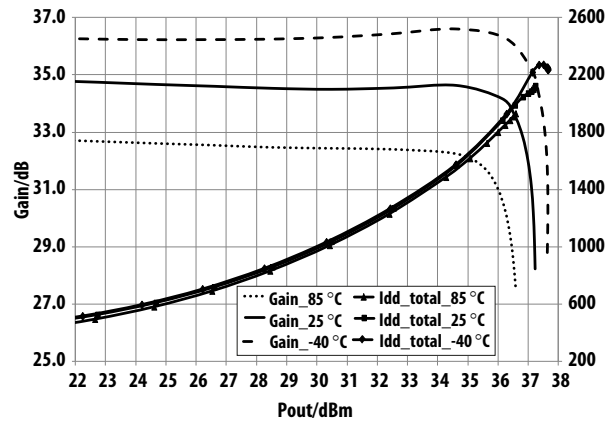


Figure 25. Over-temperature Gain, Idd\_Total vs Pout @ 859MHz  
 $V_{dd}=V_{ddBias}=5.0V$  voltage

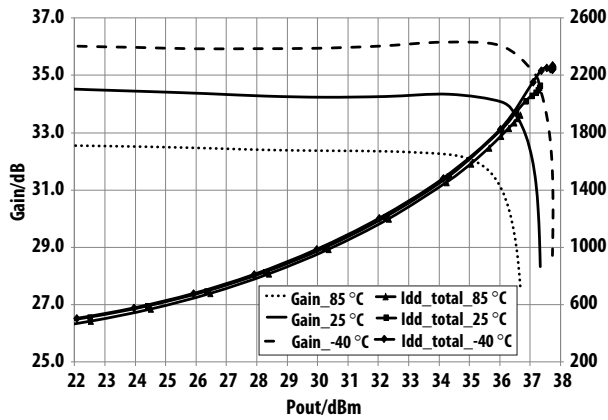


Figure 26. Over-temperature Gain, Idd\_Total vs Pout @ 869MHz  
 $V_{dd}=V_{ddBias}=5.0V$  operating voltage

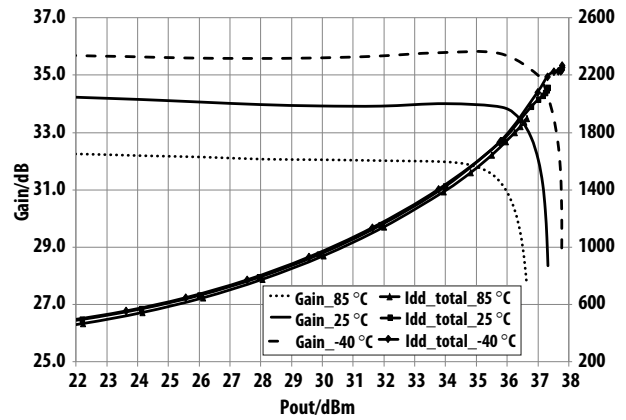


Figure 27. Over-temperature Gain, Idd\_Total vs Pout @ 880MHz  
 $V_{dd}=V_{ddBias}=5.0V$  voltage



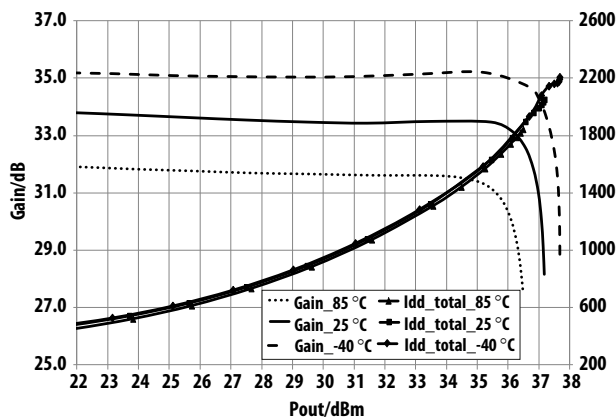


Figure 28. Over-temperature Gain, Idd\_Total vs Pout @ 894MHz  
 $V_{dd}=V_{ddBias}=5.0V$  operating voltage


**MGA-43428 typical 3GPP W-CDMA Test model #1 Spectrum Emission Mask performance at Vdd=VddBias=5.0V, Vc2=Vc3=3V unless otherwise stated.**

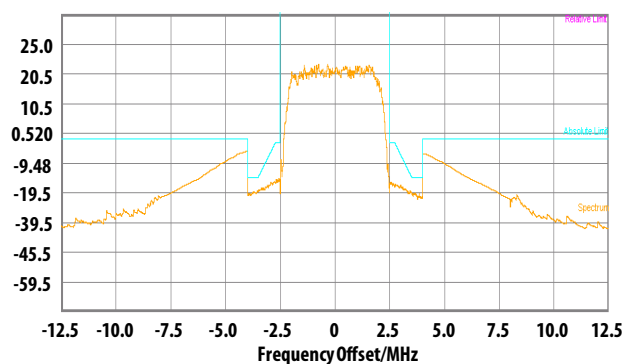


**Figure 29. SEM at Pout=28dBm @ 851MHz**

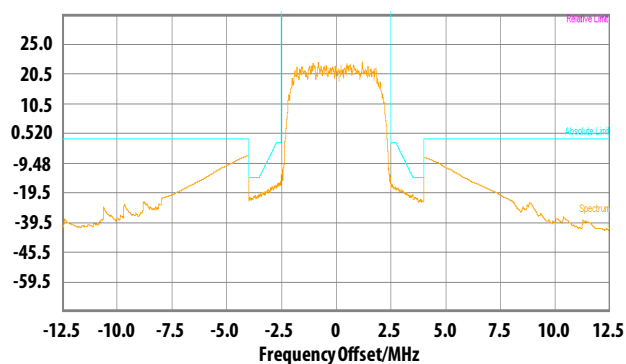


**Figure 30. SEM at Pout=28dBm @ 859MHz**

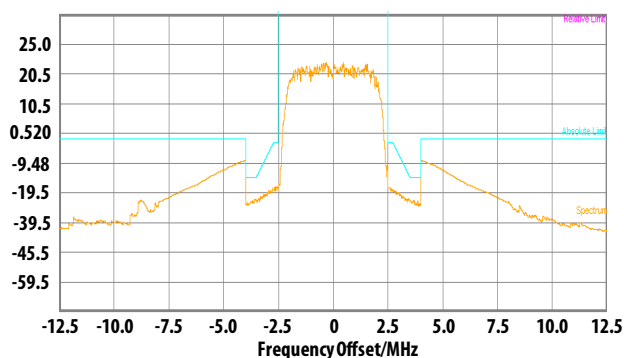

**Figure 31. SEM at Pout=28dBm @ 869MHz**

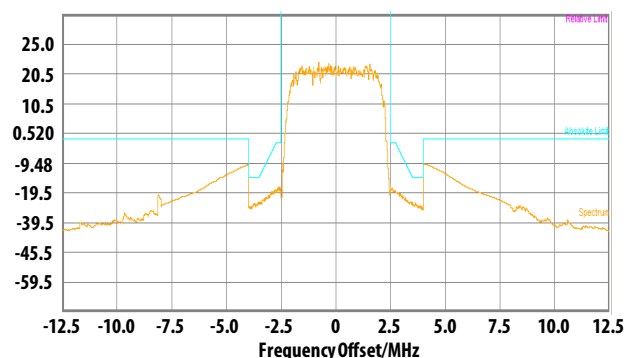

**Figure 32. SEM at Pout=28dBm @ 880MHz**

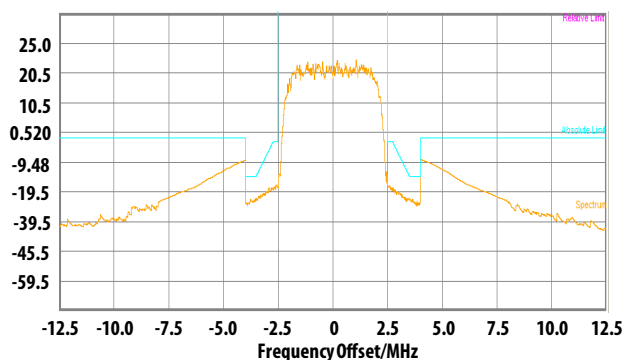

**Figure 33. SEM at Pout=28dBm @ 894MHz**



**S-Parameter<sup>[5]</sup> (Vdd=VddBias=5.0V, Vc2=Vc3=3V, TA=25 °C, 50ohm)**

| <b>Freq</b>  | <b>S11</b>  | <b>S11</b>   | <b>S21</b>  | <b>S21</b>   | <b>S12</b>  | <b>S12</b>   | <b>S22</b>  | <b>S22</b>   |
|--------------|-------------|--------------|-------------|--------------|-------------|--------------|-------------|--------------|
| <b>(GHz)</b> | <b>(dB)</b> | <b>(ang)</b> | <b>(dB)</b> | <b>(ang)</b> | <b>(dB)</b> | <b>(ang)</b> | <b>(dB)</b> | <b>(ang)</b> |
| 0.1          | -0.279      | 163.713      | -28.202     | -21.616      | -63.031     | -63.949      | -0.748      | 174.481      |
| 0.2          | -0.462      | 144.704      | -1.01       | -61.828      | -63.509     | -121.03      | -1.172      | 171.921      |
| 0.3          | -0.847      | 114.595      | 17.853      | -124.749     | -79.206     | -132.692     | -1.461      | 173.548      |
| 0.4          | -3.813      | 40.322       | 29.673      | 139.221      | -65.466     | -51.065      | -0.637      | 170.986      |
| 0.5          | -6.353      | -105.622     | 31.19       | 44.592       | -63.041     | -112.889     | -0.818      | 162.172      |
| 0.6          | -3.764      | -175.42      | 31.777      | 5.7          | -57.981     | -156.352     | -0.88       | 155.194      |
| 0.70         | -4.76       | 148.36       | 33.604      | -44.016      | -51.025     | 178.006      | -1.968      | 136.005      |
| 0.75         | -6.288      | 129.471      | 34.716      | -70.21       | -48.786     | 161.263      | -3.67       | 120.258      |
| 0.76         | -6.763      | 125.483      | 34.918      | -75.948      | -48.366     | 158.687      | -4.22       | 116.371      |
| 0.77         | -7.339      | 121.292      | 35.114      | -81.952      | -47.791     | 151.075      | -4.906      | 111.915      |
| 0.78         | -8.001      | 117.126      | 35.286      | -88.131      | -47.225     | 147.119      | -5.734      | 107.047      |
| 0.79         | -8.796      | 112.954      | 35.429      | -94.496      | -46.979     | 141.353      | -6.727      | 101.727      |
| 0.80         | -9.741      | 108.927      | 35.539      | -101.032     | -46.63      | 134.179      | -7.933      | 95.81        |
| 0.81         | -10.83      | 105.292      | 35.614      | -107.702     | -45.549     | 129.29       | -9.429      | 89.08        |
| 0.82         | -12.153     | 101.863      | 35.634      | -114.496     | -45.766     | 121.44       | -11.386     | 80.772       |
| 0.83         | -13.737     | 99.621       | 35.609      | -121.38      | -46.181     | 116.344      | -13.877     | 69.025       |
| 0.84         | -15.608     | 98.82        | 35.54       | -128.276     | -45.979     | 109.828      | -17.087     | 49.51        |
| 0.85         | -17.824     | 100.403      | 35.422      | -135.133     | -45.224     | 101.98       | -20.429     | 16.245       |
| 0.86         | -20.478     | 105.858      | 35.255      | -141.912     | -44.529     | 95.379       | -21.19      | -35.397      |
| 0.87         | -23.096     | 120.412      | 35.035      | -148.549     | -45.07      | 90.014       | -17.336     | -67.009      |
| 0.88         | -24.32      | 144.578      | 34.78       | -155.023     | -45.382     | 86.305       | -14.306     | -84.631      |
| 0.89         | -23.832     | 167.094      | 34.491      | -161.319     | -45.459     | 80.565       | -12.037     | -95.432      |
| 0.90         | -22.279     | -177.303     | 34.171      | -167.415     | -45.402     | 74.488       | -10.302     | -102.979     |
| 0.91         | -20.561     | -170.127     | 33.823      | -173.297     | -45.396     | 72.391       | -8.924      | -109.046     |
| 0.92         | -19.244     | -167.627     | 33.451      | -178.939     | -45.905     | 66.811       | -7.864      | -113.892     |
| 0.93         | -18.252     | -166.43      | 33.074      | 175.672      | -45.84      | 64.594       | -6.996      | -118.083     |
| 0.94         | -17.533     | -166.226     | 32.691      | 170.464      | -45.894     | 59.934       | -6.266      | -121.89      |
| 0.95         | -17.021     | -166.597     | 32.299      | 165.435      | -46.183     | 53.987       | -5.651      | -125.334     |
| 0.96         | -16.655     | -167.016     | 31.893      | 160.607      | -46.477     | 51.213       | -5.139      | -128.326     |
| 0.97         | -16.434     | -167.132     | 31.502      | 155.928      | -46.507     | 42.658       | -4.705      | -131.01      |
| 0.98         | -16.369     | -167.175     | 31.106      | 151.415      | -46.475     | 41.817       | -4.333      | -133.457     |
| 0.99         | -16.39      | -167.015     | 30.713      | 147.009      | -46.787     | 41.403       | -4.01       | -135.701     |
| 1.0          | -16.836     | -165.927     | 30.35       | 142.87       | -47.117     | 39.826       | -3.775      | -137.292     |
| 1.1          | -16.787     | -123.059     | 26.778      | 103.521      | -48.588     | 4.326        | -2.322      | -150.146     |
| 1.2          | -9.819      | -126.66      | 19.659      | 68.37        | -53.365     | -29.741      | -1.188      | -154.668     |
| 1.3          | -7.267      | -125.881     | 18.231      | 53.823       | -53.431     | -32.282      | -0.737      | -163.55      |
| 1.4          | -4.808      | -136.026     | 14.993      | 28.337       | -54.615     | -57.338      | -0.553      | -168.2       |
| 1.5          | -3.381      | -147.083     | 11.549      | 5.48         | -56.792     | -54.424      | -0.422      | -171.185     |
| 1.6          | -2.589      | -157.355     | 8.124       | -16.899      | -59.051     | -79.166      | -0.194      | -174.217     |
| 1.7          | -2.235      | -166.689     | 4.221       | -40.731      | -63.931     | -92.696      | -0.185      | -177.218     |

**S-Parameter<sup>[5]</sup> (Vdd=VddBias=5.0V, Vc2=Vc3=3V, TA=25 °C, 50ohm)** Continued

| <b>Freq</b>  | <b>S11</b>  | <b>S11</b>   | <b>S21</b>  | <b>S21</b>   | <b>S12</b>  | <b>S12</b>   | <b>S22</b>  | <b>S22</b>   |
|--------------|-------------|--------------|-------------|--------------|-------------|--------------|-------------|--------------|
| <b>(GHz)</b> | <b>(dB)</b> | <b>(ang)</b> | <b>(dB)</b> | <b>(ang)</b> | <b>(dB)</b> | <b>(ang)</b> | <b>(dB)</b> | <b>(ang)</b> |
| 1.8          | -2.282      | -174.564     | -0.751      | -65.616      | -69.219     | -91.567      | -0.208      | -179.247     |
| 1.9          | -2.582      | -179.634     | -8.178      | -88.022      | -64.601     | 92.695       | -0.198      | 179.406      |
| 2.0          | -2.757      | 178.106      | -21.965     | -70.735      | -64.369     | 14.153       | -0.119      | 177.883      |
| 2.1          | -2.669      | 176.392      | -17.748     | 6.253        | -65.617     | 79.033       | -0.112      | 176.235      |
| 2.2          | -2.458      | 174.164      | -14.874     | -2.106       | -65.682     | -47.983      | -0.118      | 174.931      |
| 2.3          | -2.251      | 171.2        | -14.688     | -15.524      | -69.286     | 47.691       | -0.11       | 173.746      |
| 2.4          | -2.109      | 167.967      | -15.533     | -29.596      | -67.105     | -173.868     | -0.077      | 172.506      |
| 2.5          | -2.053      | 164.605      | -17.077     | -44.476      | -69.846     | 72.07        | -0.062      | 171.142      |
| 2.6          | -2.104      | 161.476      | -19.799     | -62.06       | -65.351     | -126.523     | -0.095      | 169.817      |
| 2.7          | -2.276      | 159.689      | -26.062     | -80.022      | -71.683     | -152.203     | -0.14       | 168.728      |
| 2.8          | -2.162      | 159.831      | -30.924     | 10.411       | -73.062     | 110.648      | -0.129      | 167.958      |
| 2.9          | -1.68       | 157.912      | -23.025     | -1.993       | -65.882     | 100.057      | -0.063      | 166.791      |
| 3.0          | -1.397      | 154.167      | -21.821     | -18.25       | -64.199     | 36.793       | -0.09       | 165.216      |
| 3.5          | -1.164      | 137.153      | -17.47      | -103.818     | -69.85      | 46.932       | -0.1        | 159.674      |
| 4.0          | -1.288      | 122.791      | -29.151     | 73.457       | -62.117     | 92.479       | -0.143      | 153.672      |
| 4.5          | -1.534      | 109.313      | -38.499     | 24.405       | -70.059     | 62.88        | -0.127      | 147.428      |
| 5.0          | -1.814      | 99.01        | -41.898     | -11.621      | -64.041     | 23.512       | -0.161      | 140.379      |
| 5.5          | -1.835      | 91.189       | -46.309     | -38.949      | -68.856     | 47.119       | -0.166      | 134.306      |
| 6.0          | -1.749      | 81.178       | -54.485     | -36.192      | -66.832     | 29.174       | -0.2        | 127.319      |
| 7.0          | -1.435      | 62.172       | -49.891     | 13.721       | -74.107     | -28.35       | -0.268      | 113.34       |
| 8.0          | -1.369      | 41.12        | -43.968     | -24.325      | -68.592     | -20.144      | -1.14       | 94.776       |
| 9.0          | -2.048      | 8.852        | -28.906     | -154.272     | -47.076     | -160.962     | -10.112     | 109.804      |
| 10.0         | -3.801      | -25.311      | -45.49      | 120.099      | -50.085     | 74.482       | -1.003      | 47.132       |
| 11.0         | -3.308      | -57.449      | -43.674     | -14.743      | -45.763     | 19.486       | -1.497      | -3.019       |
| 12.0         | -2.966      | -105.22      | -46.11      | -100.306     | -43.048     | -34.07       | -2.188      | -57.299      |
| 13.0         | -4.892      | -158.802     | -45.46      | 77.676       | -55.304     | -92.766      | -4.392      | -93.561      |
| 14.0         | -10.148     | 31.119       | -39.937     | -34.287      | -46.152     | -37.767      | -1.789      | -121.928     |
| 15.0         | -5.004      | -132.258     | -40.974     | -98.027      | -39.762     | -109.061     | -1.151      | -162.806     |
| 16.0         | -2.471      | 165.237      | -45.503     | -142.428     | -44.893     | -161.603     | -0.833      | 171.414      |
| 17.0         | -1.547      | 146.582      | -41.172     | -160.839     | -42.663     | -162.441     | -1.362      | 145.508      |
| 18.0         | -1.616      | 112.011      | -44.76      | 122.642      | -44.824     | 119.407      | -4.375      | 70.222       |
| 19.0         | -2.206      | 78.724       | -59.163     | 22.859       | -54.654     | 50.726       | -3.611      | -38.084      |
| 20.0         | -2.549      | 52.466       | -50.574     | 120.932      | -48.794     | 110.88       | -3.061      | -100.732     |

**S-Parameter<sup>[5]</sup> (Vdd=VddBias=5.5V, Vc2=2.9V, Vc3=2.7V, TA=25 °C, 50ohm)**


| Freq  | S11     | S11      | S21     | S21      | S12     | S12      | S22     | S22      |
|-------|---------|----------|---------|----------|---------|----------|---------|----------|
| (GHz) | (dB)    | (ang)    | (dB)    | (ang)    | (dB)    | (ang)    | (dB)    | (ang)    |
| 0.1   | -0.286  | 163.587  | -28.113 | -20.473  | -59.949 | 124.392  | -0.764  | 174.406  |
| 0.2   | -0.465  | 144.74   | -0.954  | -60.978  | -72.397 | 143.991  | -1.201  | 171.792  |
| 0.3   | -0.852  | 114.587  | 17.985  | -124.557 | -70.615 | -59.588  | -1.506  | 173.659  |
| 0.4   | -3.81   | 40.462   | 29.736  | 138.709  | -63.075 | -5.667   | -0.644  | 171.064  |
| 0.5   | -6.333  | -105.35  | 31.199  | 44.086   | -58.997 | -149.366 | -0.842  | 162.243  |
| 0.6   | -3.747  | -175.157 | 31.77   | 5.281    | -55.079 | -147.417 | -0.913  | 155.328  |
| 0.70  | -4.752  | 148.707  | 33.561  | -44.539  | -50.92  | 177.275  | -2.04   | 136.354  |
| 0.75  | -6.262  | 130.173  | 34.639  | -70.706  | -48.526 | 155.844  | -3.785  | 121.029  |
| 0.76  | -6.745  | 126.145  | 34.834  | -76.43   | -47.924 | 154.719  | -4.345  | 117.267  |
| 0.77  | -7.297  | 122.137  | 35.026  | -82.402  | -47.162 | 146.629  | -5.042  | 113.067  |
| 0.78  | -7.957  | 118.09   | 35.19   | -88.535  | -47.265 | 144.931  | -5.867  | 108.432  |
| 0.79  | -8.743  | 114.122  | 35.326  | -94.847  | -46.736 | 140.178  | -6.867  | 103.394  |
| 0.80  | -9.659  | 110.345  | 35.433  | -101.326 | -45.772 | 131.728  | -8.099  | 97.832   |
| 0.81  | -10.701 | 106.869  | 35.505  | -107.934 | -45.359 | 124.52   | -9.64   | 91.528   |
| 0.82  | -12.004 | 103.81   | 35.522  | -114.66  | -46.047 | 124.202  | -11.645 | 83.853   |
| 0.83  | -13.518 | 101.689  | 35.494  | -121.48  | -46.159 | 114.997  | -14.301 | 73.481   |
| 0.84  | -15.277 | 101.048  | 35.425  | -128.302 | -45.533 | 107.384  | -17.882 | 55.435   |
| 0.85  | -17.332 | 102.713  | 35.312  | -135.082 | -44.982 | 103.656  | -21.844 | 20.215   |
| 0.86  | -19.743 | 107.781  | 35.147  | -141.803 | -45.587 | 100.985  | -22.734 | -41.021  |
| 0.87  | -21.994 | 120.516  | 34.933  | -148.379 | -45.245 | 92.519   | -18.069 | -72.179  |
| 0.88  | -23.38  | 140.646  | 34.684  | -154.773 | -45.448 | 84.093   | -14.697 | -88.553  |
| 0.89  | -23.249 | 160.564  | 34.402  | -161.028 | -45.609 | 79.511   | -12.303 | -98.361  |
| 0.90  | -21.997 | 176.014  | 34.09   | -167.105 | -45.602 | 76.916   | -10.524 | -105.294 |
| 0.91  | -20.56  | -175.193 | 33.75   | -172.934 | -45.575 | 71.343   | -9.117  | -110.743 |
| 0.92  | -19.322 | -171.735 | 33.39   | -178.576 | -45.468 | 65.167   | -8.024  | -115.281 |
| 0.93  | -18.389 | -169.954 | 33.02   | 176.049  | -45.427 | 62.522   | -7.131  | -119.253 |
| 0.94  | -17.692 | -169.259 | 32.643  | 170.862  | -45.449 | 59.112   | -6.387  | -122.873 |
| 0.95  | -17.181 | -169.17  | 32.256  | 165.842  | -45.719 | 54.312   | -5.764  | -126.15  |
| 0.96  | -16.813 | -169.225 | 31.86   | 160.993  | -46.491 | 49.458   | -5.238  | -129.005 |
| 0.97  | -16.614 | -169.18  | 31.473  | 156.308  | -46.529 | 43.464   | -4.801  | -131.602 |
| 0.98  | -16.544 | -169.187 | 31.083  | 151.795  | -46.174 | 40.697   | -4.422  | -133.965 |
| 0.99  | -16.567 | -168.844 | 30.696  | 147.381  | -46.449 | 38.713   | -4.089  | -136.141 |
| 1.0   | -17.035 | -167.585 | 30.336  | 143.218  | -46.977 | 36.093   | -3.842  | -137.678 |
| 1.1   | -17.075 | -122.526 | 26.798  | 103.645  | -48.729 | 5.626    | -2.362  | -150.208 |
| 1.2   | -9.913  | -126.184 | 19.671  | 68.526   | -53.615 | -32.039  | -1.2    | -154.678 |
| 1.3   | -7.305  | -125.412 | 18.279  | 53.652   | -52.97  | -36.668  | -0.748  | -163.544 |
| 1.4   | -4.826  | -135.822 | 15.026  | 27.891   | -54.817 | -59.095  | -0.558  | -168.195 |
| 1.5   | -3.399  | -146.974 | 11.554  | 4.822    | -56.408 | -75.543  | -0.424  | -171.164 |
| 1.6   | -2.615  | -157.241 | 8.082   | -17.645  | -61.14  | -92.315  | -0.193  | -174.207 |
| 1.7   | -2.269  | -166.539 | 4.121   | -41.437  | -63.405 | -145.986 | -0.182  | -177.204 |
| 1.8   | -2.308  | -174.296 | -0.908  | -66.026  | -66.51  | -130.127 | -0.205  | -179.259 |
| 1.9   | -2.584  | -179.354 | -8.352  | -87.931  | -73.06  | 173.723  | -0.206  | 179.382  |

**S-Parameter<sup>[5]</sup> (Vdd=VddBias=5.5V, Vc2=2.9V, Vc3=2.7V, TA=25 °C, 50ohm)** Continued

| Freq  | S11     | S11      | S21     | S21      | S12     | S12      | S22     | S22      |
|-------|---------|----------|---------|----------|---------|----------|---------|----------|
| (GHz) | (dB)    | (ang)    | (dB)    | (ang)    | (dB)    | (ang)    | (dB)    | (ang)    |
| 2.0   | -2.761  | 178.271  | -22.039 | -69.716  | -65.774 | 151.339  | -0.121  | 177.893  |
| 2.1   | -2.663  | 176.54   | -17.819 | 6.795    | -63.97  | -13.319  | -0.113  | 176.222  |
| 2.2   | -2.464  | 174.227  | -14.889 | -1.559   | -67.191 | 104.434  | -0.119  | 174.928  |
| 2.3   | -2.251  | 171.314  | -14.697 | -15.111  | -66.77  | -106.52  | -0.111  | 173.744  |
| 2.4   | -2.104  | 168.054  | -15.546 | -29.015  | -68.601 | -19.953  | -0.077  | 172.53   |
| 2.5   | -2.047  | 164.65   | -17.094 | -44.425  | -62.938 | -9.8     | -0.064  | 171.132  |
| 2.6   | -2.092  | 161.602  | -19.729 | -61.989  | -72.969 | -143.209 | -0.094  | 169.813  |
| 2.7   | -2.258  | 159.742  | -26.149 | -79.872  | -71.475 | 65.475   | -0.135  | 168.749  |
| 2.8   | -2.145  | 159.798  | -30.83  | 10.899   | -72.344 | 120.391  | -0.126  | 167.924  |
| 2.9   | -1.681  | 157.858  | -22.97  | -1.781   | -73.269 | 131.105  | -0.059  | 166.765  |
| 3.0   | -1.395  | 154.134  | -21.785 | -18.675  | -62.432 | 106.999  | -0.095  | 165.205  |
| 3.5   | -1.159  | 137.132  | -17.429 | -104.237 | -67.221 | 44.106   | -0.094  | 159.67   |
| 4.0   | -1.288  | 122.79   | -29.08  | 73.168   | -62.342 | 67.886   | -0.148  | 153.651  |
| 4.5   | -1.527  | 109.297  | -38.443 | 21.915   | -64.339 | 63.746   | -0.128  | 147.402  |
| 5.0   | -1.803  | 98.976   | -42.087 | -12.946  | -68.747 | -12.26   | -0.162  | 140.367  |
| 5.5   | -1.821  | 91.127   | -46.559 | -42.386  | -64.34  | 28.7     | -0.173  | 134.291  |
| 6.0   | -1.744  | 81.077   | -53.972 | -39.128  | -67.047 | 9.154    | -0.198  | 127.323  |
| 7.0   | -1.44   | 62.029   | -50.315 | 13.331   | -64.987 | -8.73    | -0.271  | 113.315  |
| 8.0   | -1.38   | 41.054   | -43.776 | -23.713  | -68.971 | 6.022    | -1.142  | 94.756   |
| 9.0   | -2.061  | 8.775    | -28.893 | -155.39  | -47.692 | -159.637 | -10.044 | 109.905  |
| 10.0  | -3.817  | -25.346  | -46.107 | 116.46   | -51.239 | 74.057   | -1.006  | 47.044   |
| 11.0  | -3.305  | -57.386  | -43.697 | -11.253  | -45.56  | 19.399   | -1.499  | -3.149   |
| 12.0  | -2.955  | -105.162 | -45.718 | -108.798 | -42.729 | -35.532  | -2.193  | -57.433  |
| 13.0  | -4.867  | -158.812 | -44.919 | 75.339   | -52.813 | -85.386  | -4.396  | -93.647  |
| 14.0  | -10.184 | 30.467   | -39.941 | -33.914  | -46.323 | -32.018  | -1.793  | -122.102 |
| 15.0  | -5.008  | -132.666 | -41.079 | -100.137 | -39.888 | -107.586 | -1.155  | -162.923 |
| 16.0  | -2.467  | 165.054  | -45.916 | -140.817 | -45.06  | -165.069 | -0.838  | 171.323  |
| 17.0  | -1.544  | 146.276  | -41.593 | -160.555 | -42.588 | -158.639 | -1.378  | 145.37   |
| 18.0  | -1.619  | 111.824  | -44.741 | 119.814  | -45.26  | 119.527  | -4.408  | 69.888   |
| 19.0  | -2.211  | 78.503   | -58.683 | 56.644   | -54.262 | 31.438   | -3.612  | -38.577  |
| 20.0  | -2.547  | 52.28    | -49.019 | 110.908  | -50.645 | 116.823  | -3.059  | -101.004 |

Notes:


5. S-parameter is measured with deembedded reference plane at DUT RFin and RFout pins.

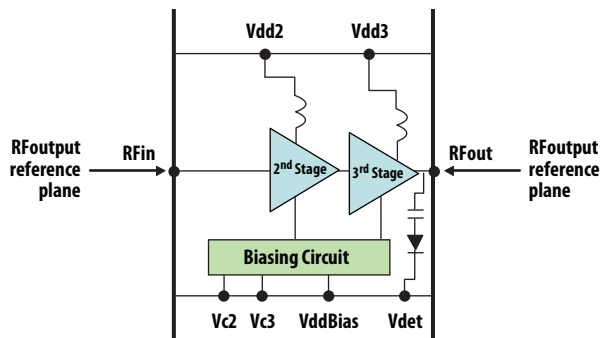

**Figure 34. RFinput and RFoutput Reference Plane**

## Demonstration Board Top View

(Vdd=VddBias=5.0V, Vc2= Vc3=3V; Vdd=VddBias=5.5V operating voltage, Vc2=2.9V, Vc3=2.7V)

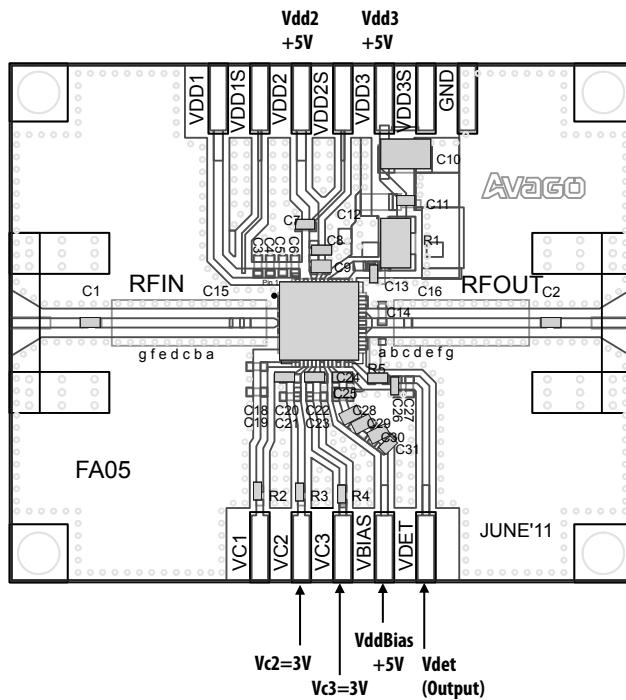

| Component                                         | Value             | Supplier | Size |
|---------------------------------------------------|-------------------|----------|------|
| C1, C2, C20, C22                                  | 56pF $\pm$ 5%     | Murata   | 0402 |
| C11, C31                                          | 0.1uF $\pm$ 10%   | Murata   | 0402 |
| C3, C4, C5, C6, C12, C14, C18, C19, C21, C23, C27 | Not Used          | Murata   | 0402 |
| C10                                               | 2.2uF $\pm$ 10%   | Murata   | 0805 |
| C26                                               | 22nF $\pm$ 10%    | Kyocera  | 0402 |
| R1                                                | 0 $\Omega$        | KOA      | 0805 |
| R3, R4, R5                                        | 0 $\Omega$        | KOA      | 0402 |
| C24                                               | 3.9pF $\pm$ 0.025 | Murata   | 0402 |
| C25                                               | 22pF $\pm$ 5%     | Murata   | 0402 |
| C28                                               | 82pF JA01         | Murata   | 0402 |
| C8, C29                                           | 2200pF JA01       | Murata   | 0402 |
| C7, C13, C30                                      | 0.047uF $\pm$ 5%  | Murata   | 0402 |
| C9                                                | 12pF $\pm$ 5%     | Murata   | 0402 |

Note:

For performance optimization control voltage for individual stages can be adjusted by varying R2, R3 and R4 resistor value.


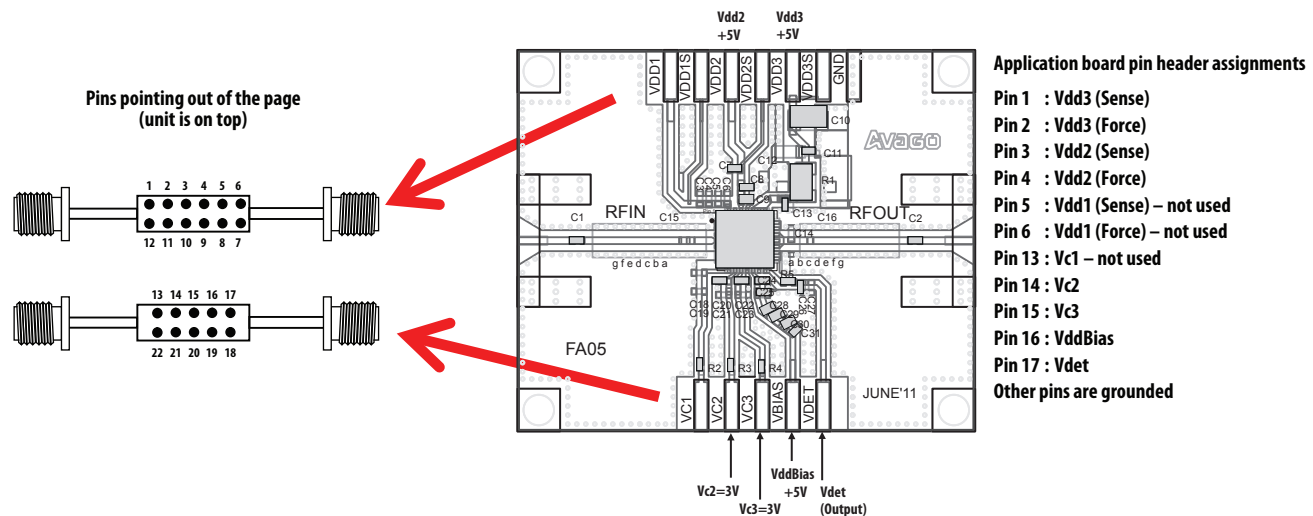


Figure 35. Demonstration board application circuit for MGA-43428 module

## Application Schematic

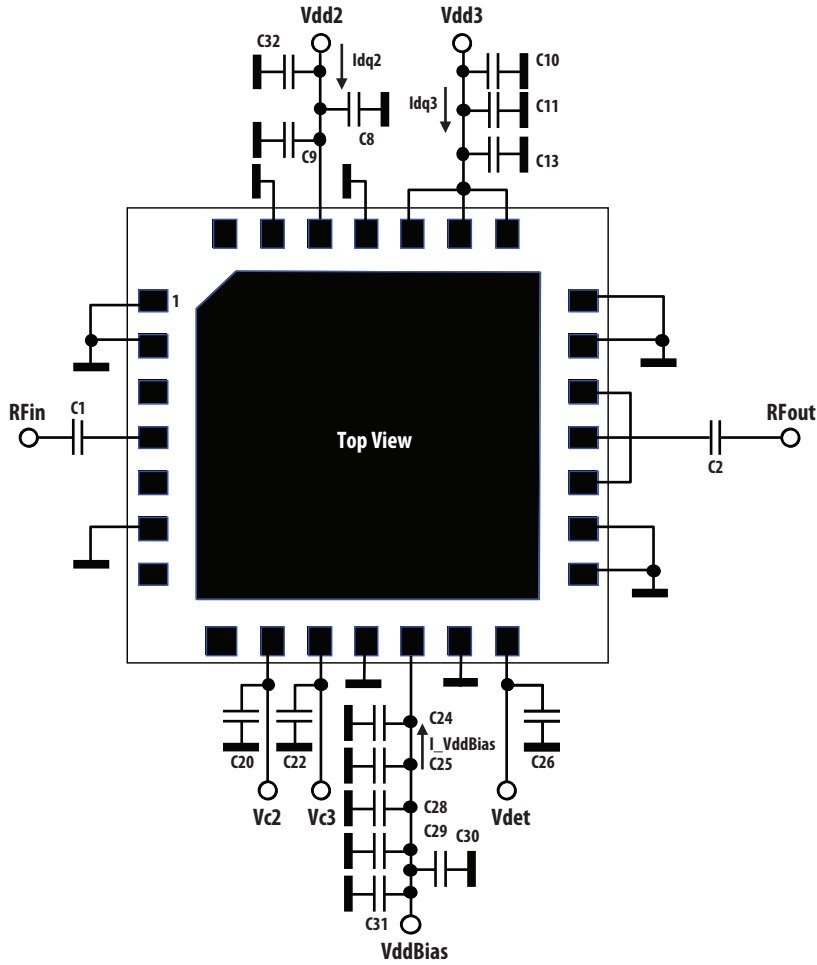

**Figure 36. Application schematic in demonstration board**

### Notes

1. All capacitors on supply lines are bypass capacitors
2.  $C_1 / C_2$  are RF coupling capacitors.
3. For  $V_{dd}=V_{ddBias}=5V$ ,  $I_{dq2} = 100 \text{ mA}$ ,  $I_{dq3} = 250 \text{ mA}$ ,  $I_{V_{ddBias}} = 14 \text{ mA}$ .  $I_{dq2/3}$  are adjusted by voltages to CMOS-compatible control pins  $V_{c2/3}$  respectively. These typical bias currents were obtained with  $V_{c2/3}$  voltages in Fig 2 below. Adjustment of these currents enable optimum bias conditions to be achieved for best linearity and efficiency for a given modulation type.
4. For  $V_{dd}=V_{ddBias}=5.5V$ ,  $V_{c2} = 2.9V$  and  $V_{c3} = 2.7V$  with typical  $I_{dq2} = 100 \text{ mA}$ ,  $I_{dq3} = 245 \text{ mA}$ ,  $I_{V_{ddBias}} = 14 \text{ mA}$

## MGA-43428 typical $I_{c2}$ , $I_{c3}$ Vs $V_c$ performance unless otherwise stated

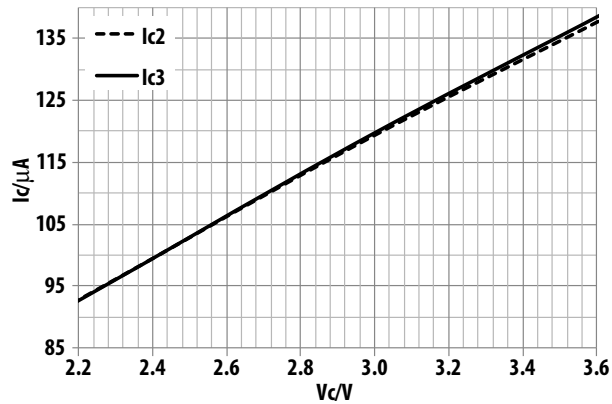


Figure 37.  $I_c$  Versus  $V_c$  at  $V_{dd}=V_{ddBias}=5.0V$



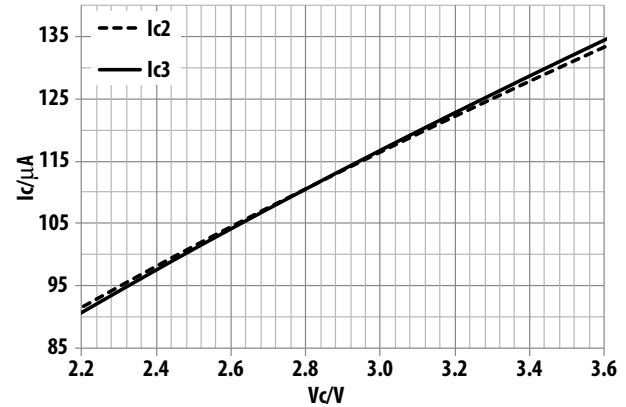


Figure 38.  $I_c$  Versus  $V_c$  at  $V_{dd}=V_{ddBias}=5.5V$


## PCB Land Pattern and Stencil Outline

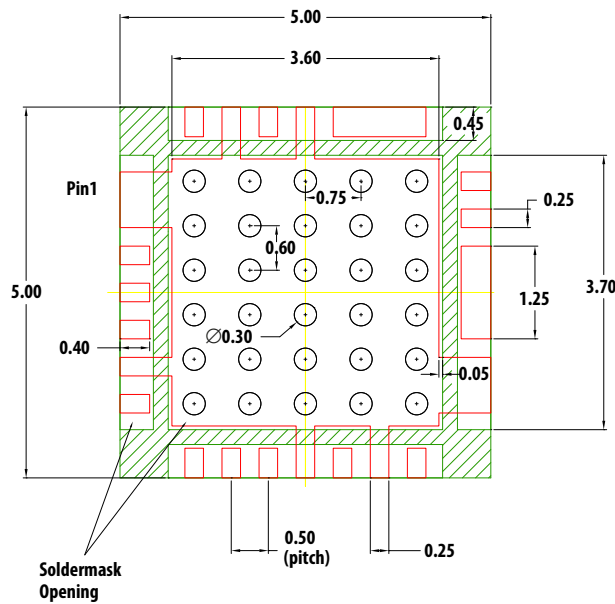

**Land Pattern**

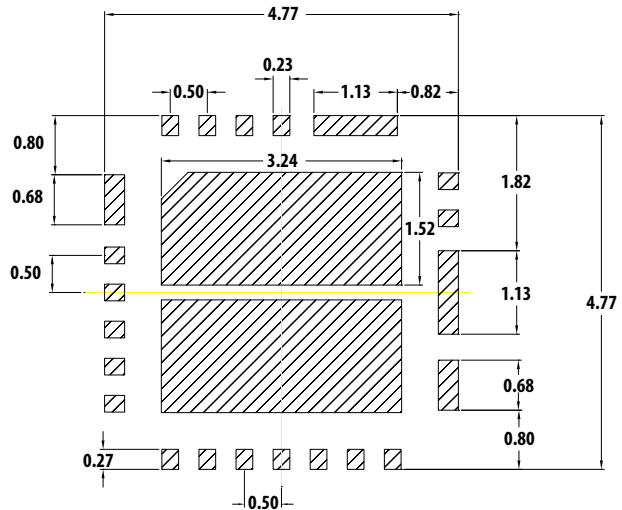


**Stencil Opening**




### Note :

1. Recommended Land Pattern and Stencil.
2. 4 mils stencil thickness recommended.
3. All dimensions are in mm

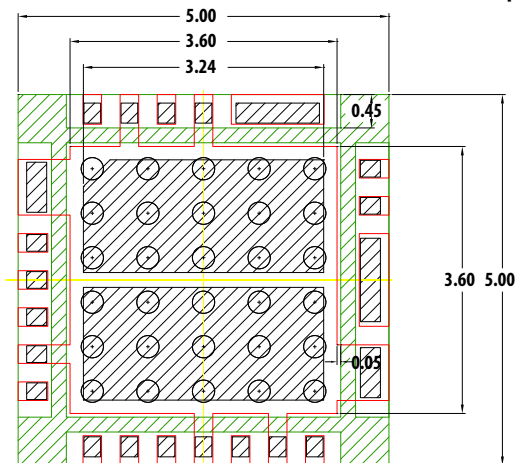

**Combination of Land Pattern & Stencil Opening**

## MCOB (5.0 x 5.0 x 0.9) mm 28-Lead Package Dimensions

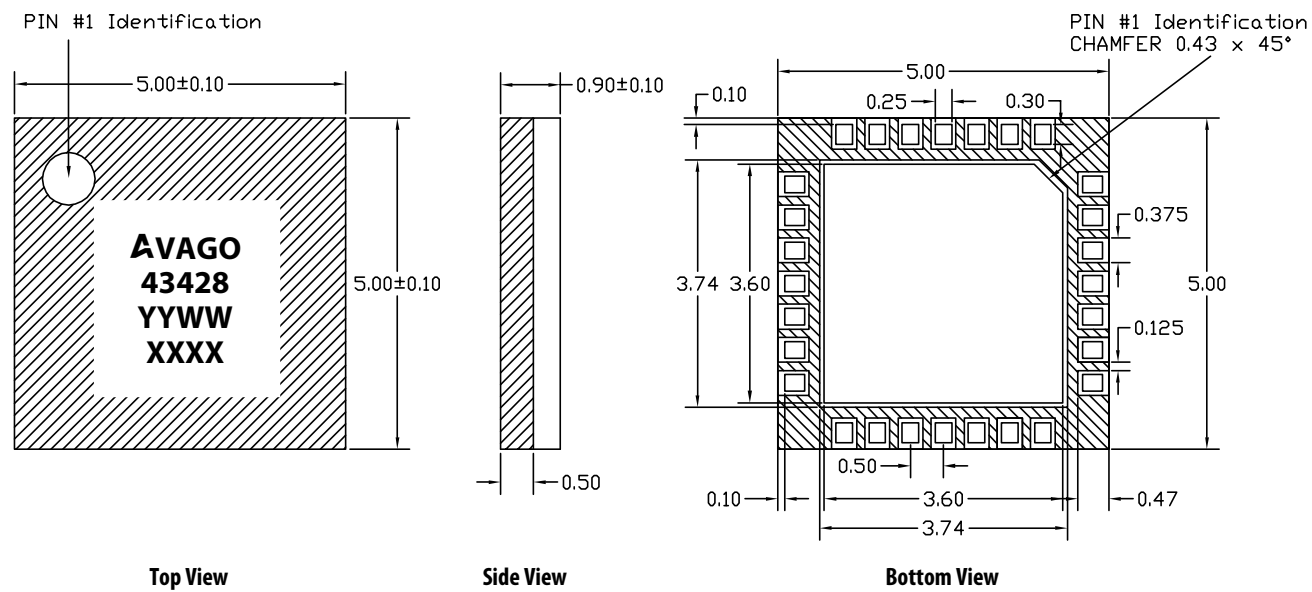

### Note


1. All dimensions are in millimeters.
2. Dimensions are inclusive of plating.
3. Dimensions are exclusive of mold flash and metal burr.

## Part Number Ordering Information



| Part Number    | Qty  | Container      |
|----------------|------|----------------|
| MGA-43428-BLKG | 100  | Antistatic Bag |
| MGA-43428-TR1G | 1000 | 7" Reel        |



## Device Orientation


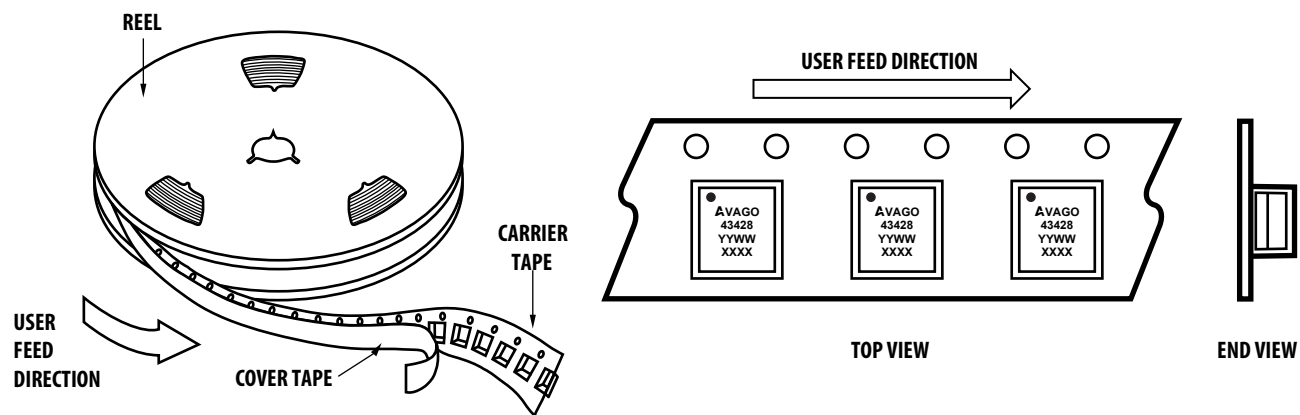


## Tape Dimensions

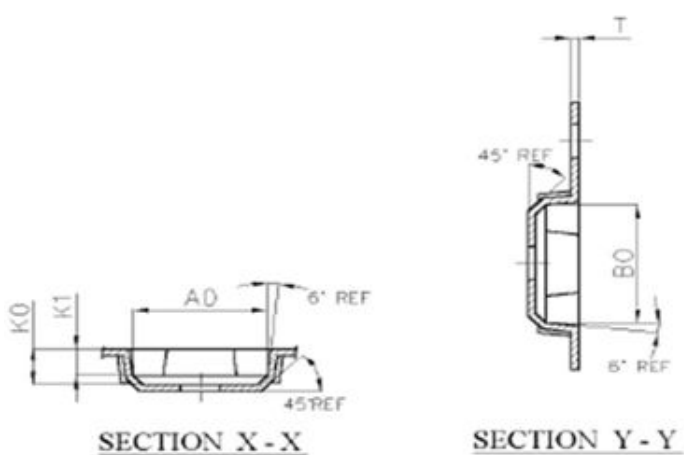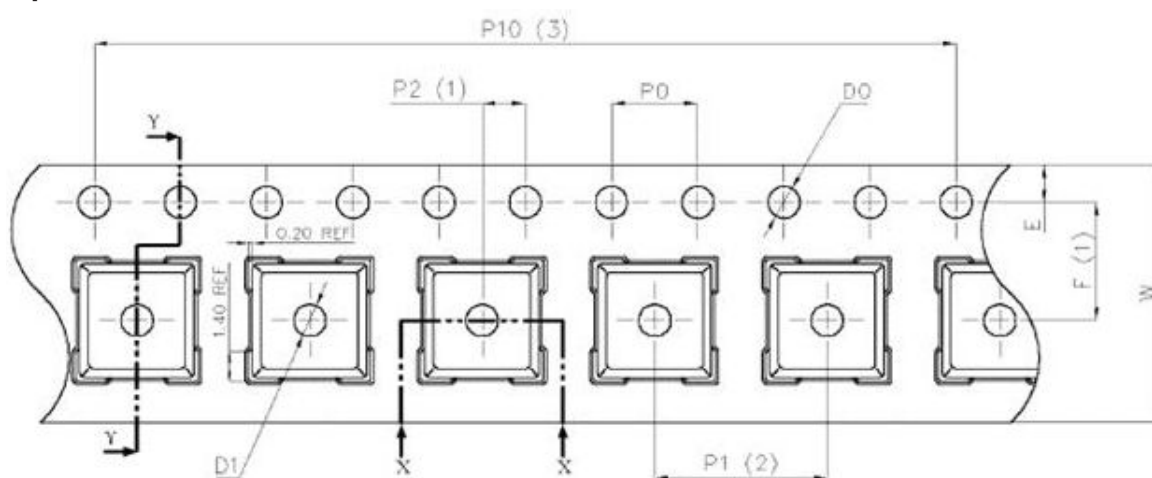

| Dimension List |                                    |        |            |
|----------------|------------------------------------|--------|------------|
| Annote         | Millimeter                         | Annote | Millimeter |
| A0             | 5.40±0.10                          | P0     | 4.00±0.10  |
| B0             | 5.40±0.10                          | P2     | 2.00±0.10  |
| D0             | 1.50 <sup>+0.10</sup> <sub>0</sub> | P10    | 40.00±0.20 |
| D1             | 1.60±0.10                          | E      | 1.75±0.10  |
| K0             | 1.90±0.10                          | F      | 5.50±0.10  |
| K1             | 1.50±0.10                          | T      | 0.30±0.03  |
| P1             | 8.00±0.10                          | W      | 12.00±0.30 |

### Reel Dimensions (7" reel)

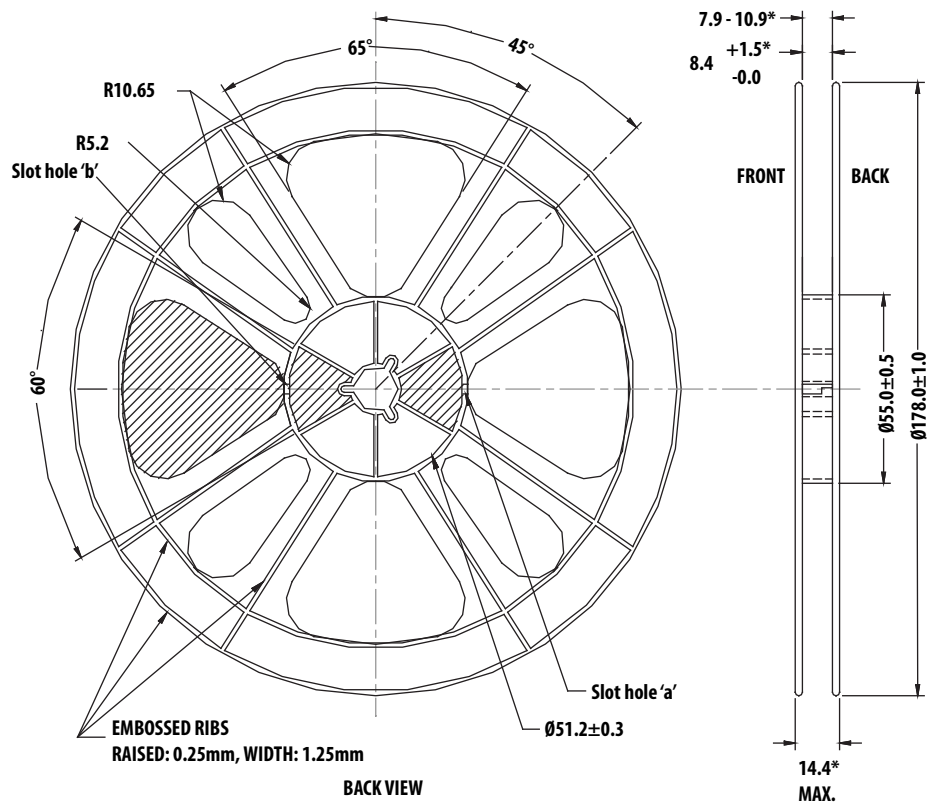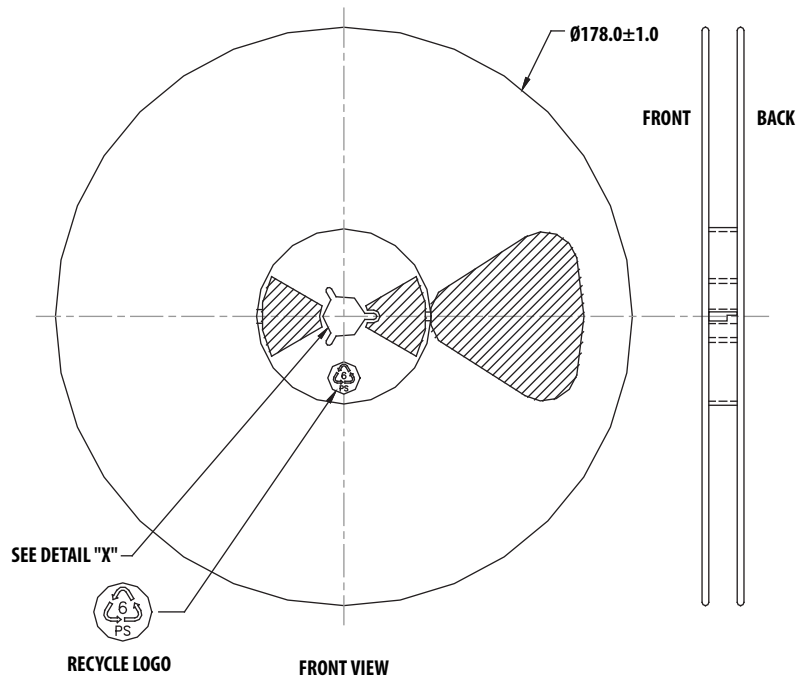

For product information and a complete list of distributors, please go to our web site: **[www.avagotech.com](http://www.avagotech.com)**

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries.  
Data subject to change. Copyright © 2005-2012 Avago Technologies. All rights reserved.  
AV02-3796EN - October 30, 2012

