

# CZL608



## Main Application areas:

### Details:


Rated load (kg): 0.5、 1、 3、 5、 6、 10、 15、 20、 25

Main features: The product is made of alloy aluminum. It is hermetically sealed with glue to IP65, surface anodized and anti-corrosion, integral structure and easy installation. The product is suit for electronic top scale, floor scale and other weighing equipment.

### Parameters:

Precision : C2	Temp. effect on span(%F.S/10°C): $\pm 0.02$
Comprehensive error(%F.S) : $\pm 0.02$	Temp. effect on zero(%F.S/10°C) : $\pm 0.03$
Rated output(mv/v) : $2.0 \pm 0.2$	Compensated temp. range(°C) : $-10 \sim +40$
Creep(%F.S/30min) : $\pm 0.02 / \pm 0.017$	Use temp. range(°C) : $-20 \sim +60$
Zero balance(%F.S) : $\pm 1.0$	Excitation voltage(V) : $9 \sim 12$ (DC)
Input resistance( $\Omega$ ) : $405 \pm 10$	Safe overload (%F.S) : 120
Output resistance( $\Omega$ ) : $350 \pm 3$	Ultimate overload (%F.S) : 150
Insulation resistance(M $\Omega$ ) : $\geq 5000$ (100VDC)	Defend grade : IP65

### Installation size (mm):

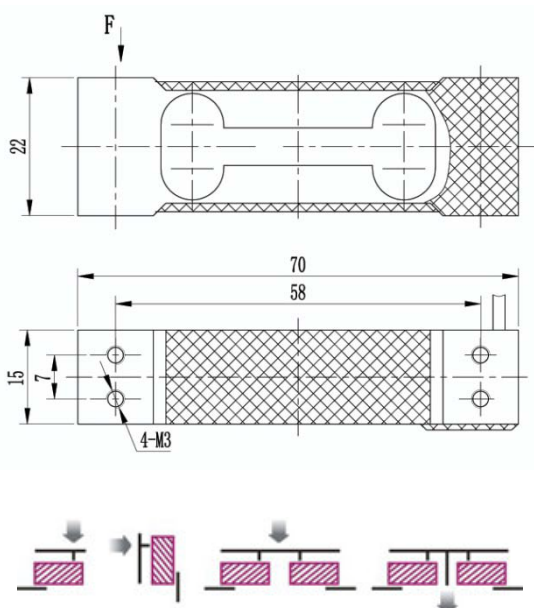

### Wiring schematic diagram:

Red: Input ( + ) 111 White: Output ( - )  
Black: Input ( - ) 111 Green: Output ( + )

Notes : It used 4-core shielded cable( $\phi 5 \times 3000$ mm)

### Load instruction: