



**WIRING SCHEME:**



**LOAD INSTRUCTION:**

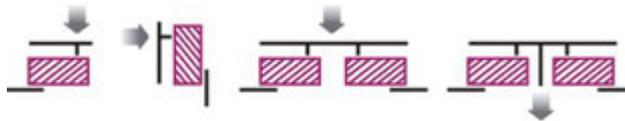

**DIMENSIONS:**

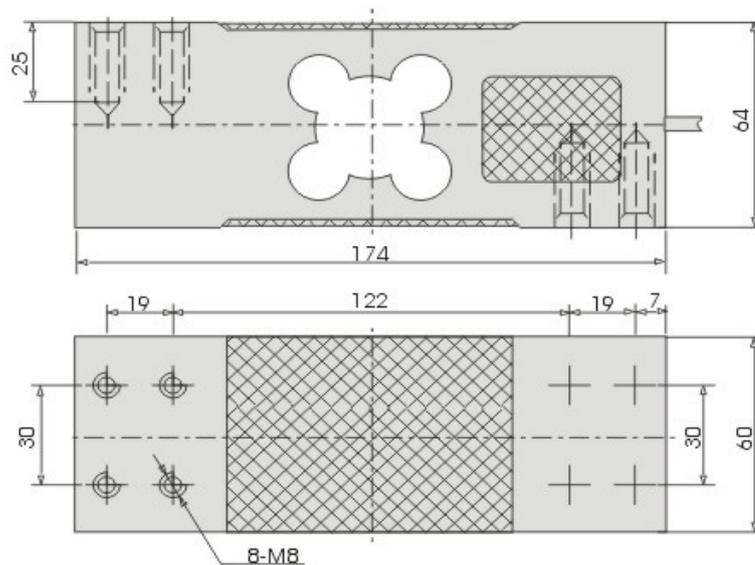

Компания СЭА  
 Адрес: Украина, 02094, г. Киев, ул.Краківська, 13-Б  
 телефон: +38 (044) 291-00-41  
 e-mail: info@sea.com.ua

## PARAMETERS:

Precision: 0.02%F.S	Insulation resistance: $\geq 5000\text{M}\Omega(100\text{VDC})$
Rated output: $2\pm 0.1\text{mV/V}$	Excitation voltage: 9VDC~12VDC
Non-linearity: 0.02%F.S	Compensated temp.range: $-10^{\circ}\text{C}\sim+40^{\circ}\text{C}$
Hysteresis: 0.02%F.S	Use temp.range: $-20^{\circ}\text{C}\sim+60^{\circ}\text{C}$
Repeat: 0.02%F.S	Temp.effect on zero: 0.03%F.S/10°C
Creep: 0.02%F.S/10min	Temp.effect on span: 0.02%F.S/10°C
Zero balance: $\pm 2\%F.S$	Safe overload: 120%
Input resistance: $405\pm 10\Omega$	Ultimate overload: 150%
Output resistance: $350\pm 3\Omega$	Defense class: IP65

