




LOAD INSTRUCTION

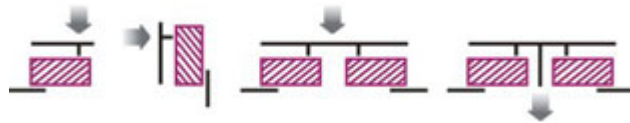

DIMENSIONS:

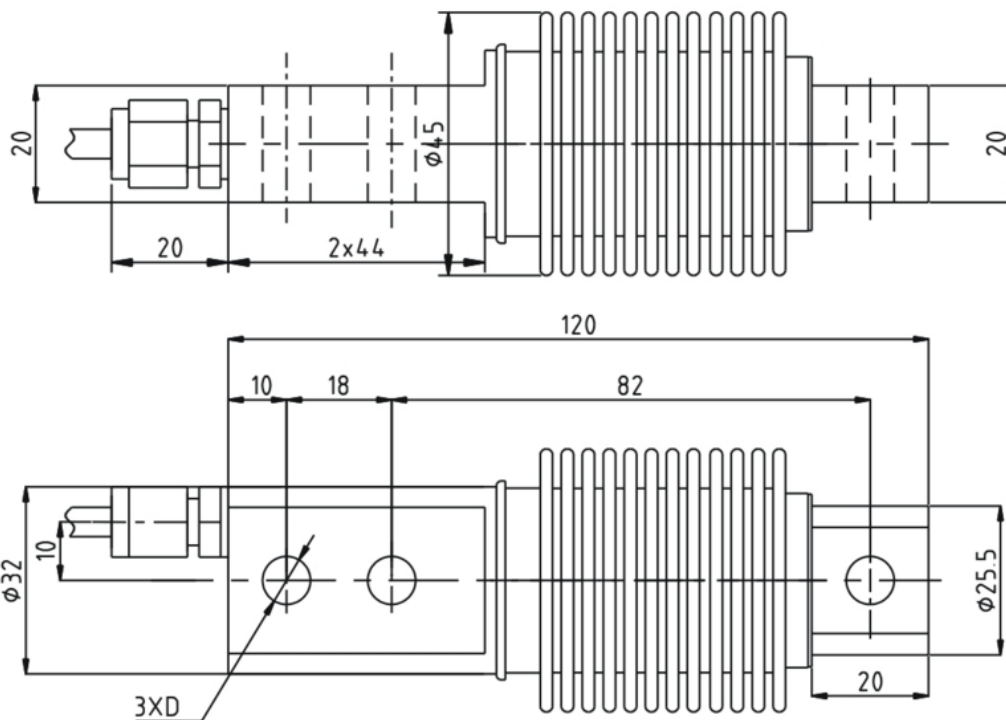

Rated Load(kg)	5-200	250-500
D	8.2	10.3

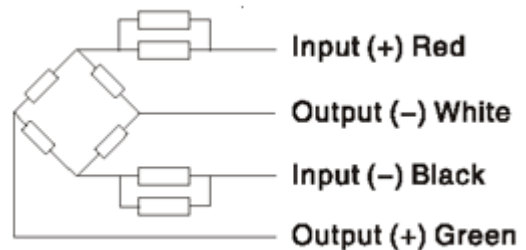

SPECIFICATION:	
Rated output: 2.0 ± 0.002 mv/v	Maximum safe overload: 150%
Combined error: $\pm 0.03\%$ F.S	Ultimate safe overload: 200%
Repeat: $\pm 0.02\%$ F.S	Recommended Excitation: 10 to 12V DC
Non-linearity: $\pm 0.02\%$ F.S	Maximum Excitation: 15V DC
Hysteresis error: $\pm 0.02\%$ F.S	Environment protection: IP68
Zero balance: $\pm 1\%$ F.S	Input impedance: $400 \pm 20 \Omega$
Creep error(30minutes): $\pm 0.02\%$ F.S	Output impedance: $352 \pm 3 \Omega$
Temperature effect on zero: $\pm 0.02\%$ F.S	Insulation resistance at 50V DC: $\geq 5000 M\Omega$
Temperature effect on output: $\pm 0.02\%$ F.S	Material: nickel-plated alloy steel
Compensated temperature range: -10 to +40°C	Cable length: 3.0meter Diameter 6mm

