

55W Constant Current – DIP-Switch

FMS-55-1050 LD

■ Approve

SELV CE

■ Features

- Class I, SELV, built-in
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP
- Power Factor $>0.95@230VAC, full\ load$
- Efficiency $\geq 90\%$
- 5 years warranty

■ Applications(Typ.)


- Linear light
- Troffer light

■ Description

FMS-55-1050 LD is a 55W constant current LED driver that operates from 198-264Vac input with 800 to 1050mA output current. The output current is selectable by DIP Switch. With it's dimensions from 280 x 30 x 21.5mm it is easy to integrate in linear light and troffer light products. To ensure trouble-free operation, protection is provided against output short circuit and over Load.

■ Model code

FMS-55-1050 LD

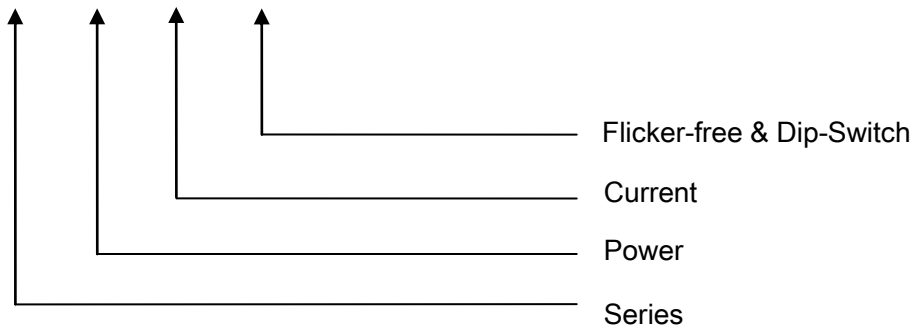

55W Constant Current – DIP-Switch

FMS-55-1050 LD

■ Specification

Input	Rated input voltage	220-240VAC
	Range of input voltage	198-264VAC
	Frequency(Hz)	50/60 Hz
	Power Factor	> 0.95@Full Load,230VAC
	Input Current max	0.4A MAX. @Full Load,198VAC
	Start-up time	< 0.5S
	Unload Power Consumption	≤0.5W
	Inrush Current	30A Max.
	THD	< 10%. @Full Load,230VAC
	Leakage Current	< 0.7mA(240VAC)
Output	Constant Current	800/.../1050mA
	Unload voltage Max. (VDC)	63V
	Voltage Range(VDC)	36-52VDC
	Rated power	54.6W Max.
	Current Accuracy	±5%@220-240VAC
	Voltage Regulation	±5% @Full Load,220-240VAC
	Load Regulation	±5%@220-240VAC
	Hold-up Time	1s max.@Full Load
	Current Ripple *Note.2	≤±3%@Full Load, 230VAC
	Output LF current ripple(<120Hz)	≤±3% @Full Load,230VAC
	Efficiency(Typ.)	≥90%
Protection	Over Load Protection	103-120%
		Protection type: Auto resume
	Over Voltage Protection	> 63VDC
		Protection type: Auto resume
Short circuit Protection	Protection type: Auto resume	
Over Temperature Protection	Protection type: Auto resume	
Environment	Operating Temperature	-20°C...+50°C
	tc	80°C
	Storage Temperature	-25°C...+60°C
	Life time	30,000H,@tc=80°C,230Vac
		50,000H,@tc=65°C, 230Vac
Humidity	20%-90%RH	
Others	Dimension	280X30X21.5(LXWXH)mm
Standards	Safety standards	EN 61347-1; EN61347-2-13; EN62384
	Withstand voltage	Input-output : 3750VAC/5mA/1min; Input-PE : 1500VAC/5mA/1min; Output-PE : 500VAC/5mA/1min;
	Isolation resistance	≥4MΩ@500VDC
	EMI	EN55015; EN61000-3-2 Class C; EN61000-3-3
	EMS	EN 61547; EN 61000-4-2; EN 61000-4-5 —L-N>1KV, L/N-PE> 2KV
Note	1.All parameters NOT specially mentioned are measured at 230VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor.	

55W Constant Current – DIP-Switch

FMS-55-1050 LD

■ Adjustable Output Current with dip-switch

Vo	Po	Io	1	2	3
36-52VDC	41.6W	800mA	--	--	--
36-52VDC	46.8W	900mA	--	--	ON
36-52VDC	49.4W	950mA	--	ON	--
36-52VDC	52W	1000mA	ON	--	ON
36-52VDC	54.6W	1050mA*	ON	ON	--

*Factory default

■ Operating window

