



## Model 1933 1310 nm CATV Coaxial DFB Laser Diode

Emcore's Model 1933 DFB lasers offer a low cost solution for linear fiberoptic links. These components can be cooled with external thermo-electric coolers for high stability, or run without TEC's to reduce power consumption. The DFB laser builds upon Ortel's long history of high performance, leading edge designs in CATV, wireless, and high speed digital applications. The laser diode devices are packaged in a compact hermetic assembly together with monitor photodiode and isolator, for flexible integration into various transmitter configurations.

### Applications

- Video signal distribution in HFC and FTTx nodes
- High linearity, low power fiber links

### Features

- Linear DFB laser design
- Output power > 8 mW available
- Bandwidth > 2700 MHz
- RoHS compliance
- Optical Isolator
- Low power consumption
- Monitor photodiode

### Performance Highlights

	Min	Typical	Max	Units
Operating Case Temperature Range	0	-	45	°C
Minimum Optical Output Power	2	-	-	
	4	-	-	mW
	8	-	-	
Frequency Range	40	-	2700	MHz
Carrier-to-Noise Ratio (79 channels)	51	-	-	dB
Composite Second Order (79 channels)	-	-	-53	dBc
	-	-	-57	
Composite Triple Beat (79 channels)	-	-	-63	dBc
	-	-	-65	
Center Wavelength	1300	-	1320	nm
Optical Return Loss	35	-	-	dB
Side Mode Suppression Ratio, CW	30	-	-	dB

See following pages for complete specifications and conditions.



**For more information on this and other products:**

Contact Sales at Emcore 626-293-3400, or visit [www.emcore.com](http://www.emcore.com).

## Absolute Maximum Ratings<sup>1</sup>

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameters	Symbol	Condition/Notes	MIN	MAX	Unit
Storage Temperature	T <sub>STG</sub>	Non-Operating	-40	85	°C
Operating Case Temperature	T <sub>OP</sub>	Continuous	-40	85	°C
Laser Diode Forward Current	I <sub>OP</sub>	CW	-	100	mA
Laser Diode Reverse Voltage	V <sub>R</sub>	Continuous	-	1.0	V
Photodiode Forward Current	I <sub>MPD</sub>	Continuous	-	2	mA
Photodiode Reverse Voltage	V <sub>MPD,R</sub>	Continuous	-	10	V
Average RF Input Power	PIN	60 Seconds	-	62	dBmV
Lead Soldering Temperature/Time	-	-	-	260/10	°C/sec
Relative Humidity	RH	Continuous	-	85	%
ESD	-	Human Body Model	-500	+500	V

1. Absolute maximum data are limited to system design only; proper device performance is not guaranteed over rating listed above. Operation beyond these maximum conditions may degrade device performance, lead to device failure, shorter lifetime, and will invalidate the device warranty.

## Electrical/Optical Characteristics

Parameters	Symbol	Conditions/Notes	Min	Typ	Max	Unit
Operating Case Temperature <sup>1</sup>	$T_{case}$	-	0	-	45	°C
Minimum Optical Output Power	$P_O$	2 mW version 4 mW version 8 mW version	2 4 8	3 6 9	4 8 -	mW
Threshold Current	$I_{TH}$	$T_{case} = 25^{\circ}C$ $T_{case} = 45^{\circ}C$	- -	8 13	15 20	mA
Laser Bias Current	$T_{OP}$	$0^{\circ}C < T_{case} < 45^{\circ}C$	-	-	85	mA
Forward Voltage	$V_F$	$I_{op}$	-	1.0	1.2	V
Laser Input Impedance	$Z$	-	2	4	8	$\Omega$
MPD Current	$I_{MPD}$	$V_{MPD} = 5V, I_{op} = 60 mA$	200	-	800	$\mu A$
MPD Dark Current	$I_D$	$V_{MPD} = 5V, I_{op} = 0$ $T_{case} = 25^{\circ}C$	-	-	50	nA
Center Wavelength	$\lambda_c$	$I_{op}$	1300	-	1320	nm
Relative Intensity Noise	RIN	CW, $I_{op}$ , $50 MHz < f < 550 MHz$	-	-	-145	dB/Hz
Optical Isolation	ISO	$0^{\circ}C < T_{case} < 45^{\circ}C$	30	-	-	dB
Spectral Width (-20 dB)	$\Delta\lambda$	$I_{op}$	-	0.1	1.0	nm
Side Mode Suppression Ratio	SMSR	$I_{op}$	30	45	-	dB
Optical Return Loss	ORL	$T_{case} = 25^{\circ}C$	35	-	-	dB

1. Referenced to base of TO header.

## RF Characteristics


Parameters	Symbol	Conditions/Notes	Min	Typ	Max	Unit
Bandwidth <sub>3 dB</sub>	BW	$I_{op}, T_{case} = 25^{\circ}C$	2700	-	-	MHz
Frequency Response Flatness <sup>1</sup>	$ S_{21} $	40 MHz < f < 1000 MHz 950 MHz < f < 2700 MHz	- -	- -	1 3	dB <sub>p-p</sub>
Carrier-to-Noise Ratio <sup>2,3</sup>	CNR	$I_{op}$	51	-	-	dB
Composite Second Order <sup>2,3</sup>	CSO	$I_{op}$	- -	- -	-53 -57	dBc
Composite Triple Beat <sup>2,3</sup>	CTB	$I_{op}$	- -	- -	-63 -65	dBc

- $I_{op}, T_{case} = 25^{\circ}C$ .
- 3.2% OMI, 79 NTSC unmodulated carriers (50 MHz to 550 MHz). 0 km fiber.
- Received power = 0 dBm.


# Model 1933 1310 nm CATV Coaxial DFB Laser Diode

PRELIMINARY DATASHEET | AUGUST 17, 2007

## Package Outline Drawing

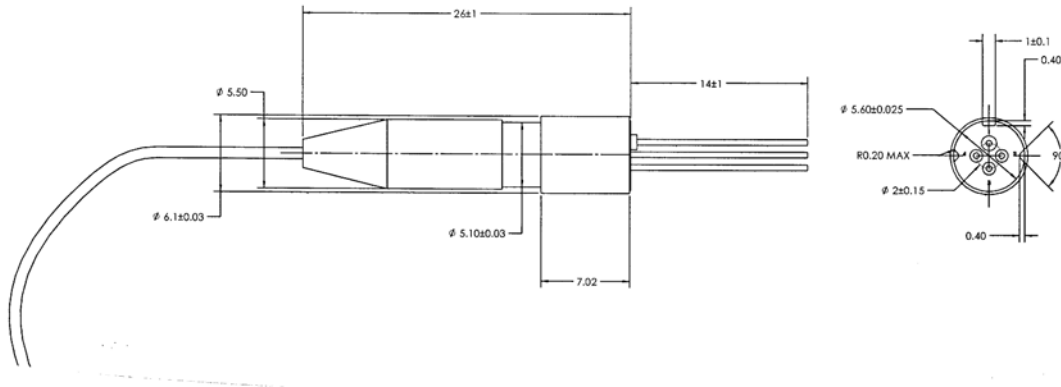

## Mounting Bracket

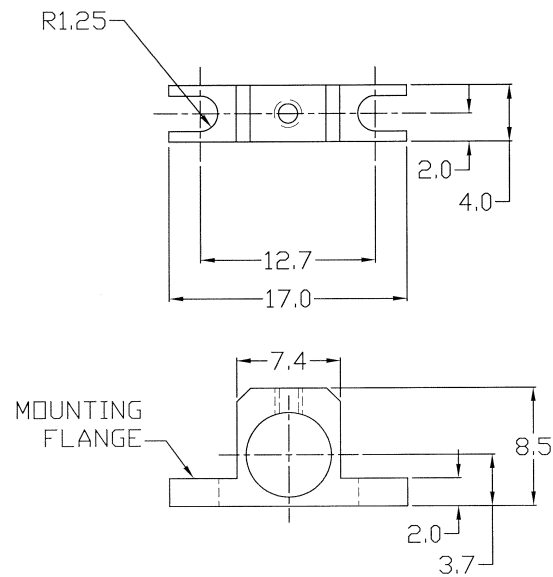


# Model 1933 1310 nm CATV Coaxial DFB Laser Diode

PRELIMINARY DATASHEET | AUGUST 17, 2007

## Reliability/Quality

Designed to meet qualification requirements of Telcordia™ (Bellcore) GR-468-CORE.

## Schematic and Pinout



Pinout A

## Pin Definitions

Pin	Description
1	LD Anode, Case Ground
2	LD Cathode
3	PD Cathode
4	PD Anode

## Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class IIIb laser product. This device has been classified with the FDA/CDRH under accession number TBD.

Single-mode fiber pigtail with SC/APC connectors (standard).


Wavelength = 1.3  $\mu\text{m}$ .

Maximum power = 50 mW.

Because of size constraints, laser safety labeling (including an FDA class IIIb label) is not affixed to the module, but attached to the outside of the shipping carton.


Product is not shipped with power supply.

**Caution: Use of controls, adjustments and procedures other than those specified herein may result in hazardous laser radiation exposure.**

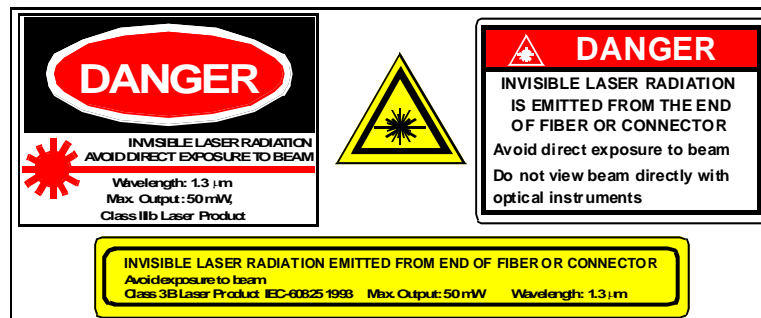

## Ordering Code Definitions

1933-w-x-yy-zz-v

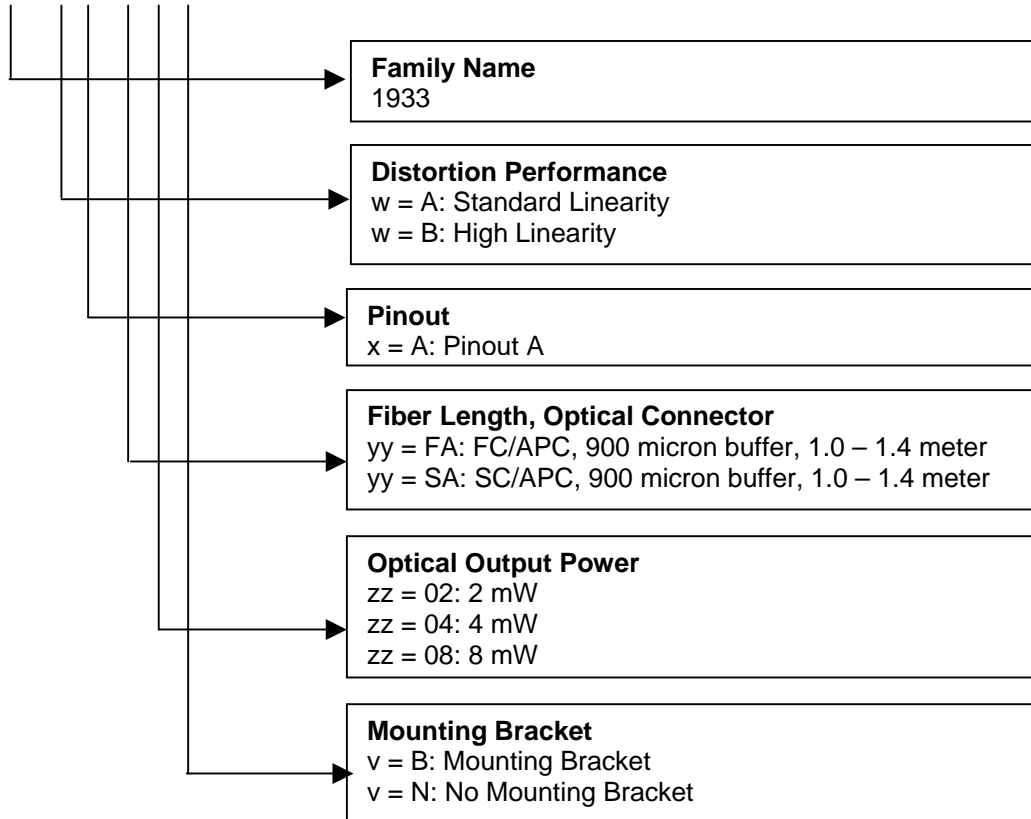

## Example

1933-B-A-S11-04: 1933, High Linearity, Pinout A, SC/APC optical connector, 1.0 – 1.4 meter fiber pigtail, 900 micron fiber buffer, 4 mW optical power

Information contained herein is deemed to be reliable and accurate as of issue date. EMCORE reserves the right to change the design or specifications of the product at any time without notice. EMCORE and the EMCORE logo are trademarks of EMCORE Corporation.