

KP-1608F3C


Features

- 1.6mmX0.8mm SMT LED, 1.1mm THICKNESS.
- MECHANICALLY AND SPECTRALLY MATCHED TO KP-1608 PHOTOTRANSISTOR.
- WATER CLEAR LENS.
- PACKAGE: 2000PCS / REEL.
- RoHS COMPLIANT.

Description

F3 Made with Gallium Arsenide Infrared Emitting diodes.

Package Dimensions

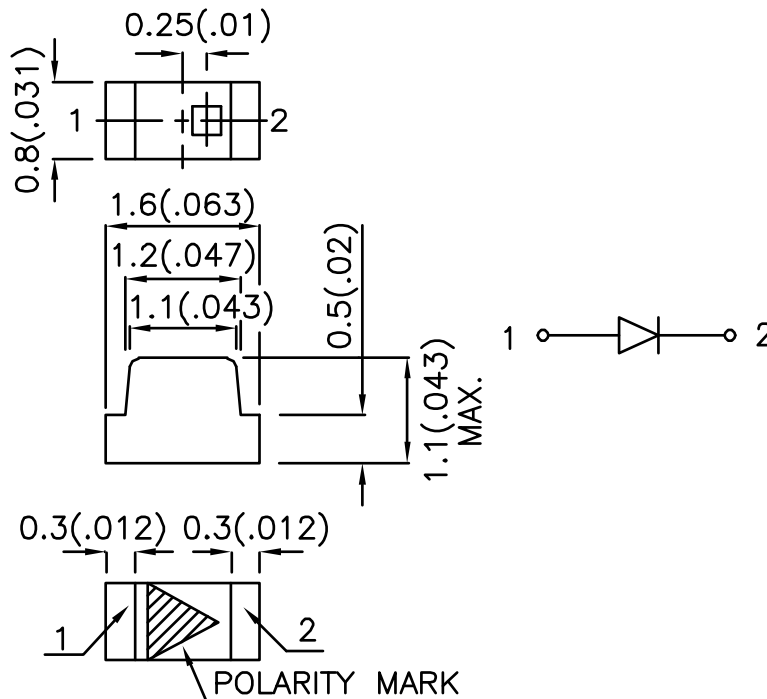

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.1(0.004)$ unless otherwise noted.
3. Specifications are subject to change without notice.

Selection Guide

| Part No. | Dice | Lens Type | Po (mW/sr) @ 20mA | | Viewing Angle |
|------------|------|-------------|----------------------|------|------------------|
| | | | Min. | Typ. | θ1/2 |
| KP-1608F3C | GaAs | WATER CLEAR | 0.4 | 1.2 | 120° |

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at TA=25°C


| Item | P/N | Symbol | Typ. | Max. | Units | Test Conditions |
|--------------------------|-----|--------|------|------|-------|-----------------|
| Forward Voltage | F3 | VF | 1.2 | 1.6 | V | IF=20mA |
| Reverse Current | F3 | IR | - | 10 | uA | VR=5V |
| Capacitance | F3 | C | 90 | - | pF | VF=0V;f=1MHz |
| Peak Spectral Wavelength | F3 | λP | 940 | - | nm | IF=20mA |
| Spectral Bandwidth | F3 | Δλ1/2 | 50 | - | nm | IF=20mA |

Absolute Maximum Ratings at TA=25°C





| Parameter | Symbol | F3 | Units |
|-------------------------|--------|------------|-------|
| Power Dissipation | PT | 100 | mW |
| DC Forward Current | IF | 50 | mA |
| Peak Forward Current[1] | iFS | 1.2 | A |
| Reverse Voltage | VR | 5 | V |
| Operating Temperature | TA | -40 To +85 | °C |
| Storage Temperature | TSTG | -40 To +85 | °C |

Note:


1. 1/100 Duty Cycle, 10μs Pulse Width.

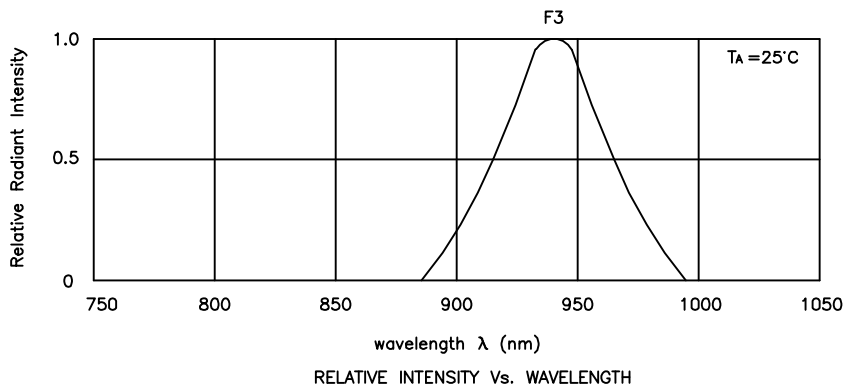

KP-1608F3C

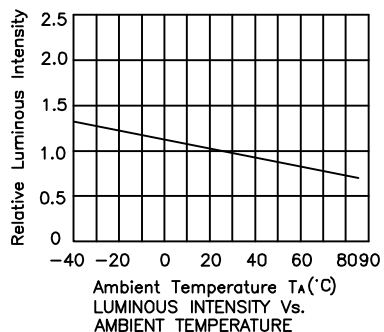


KP-1608F3C

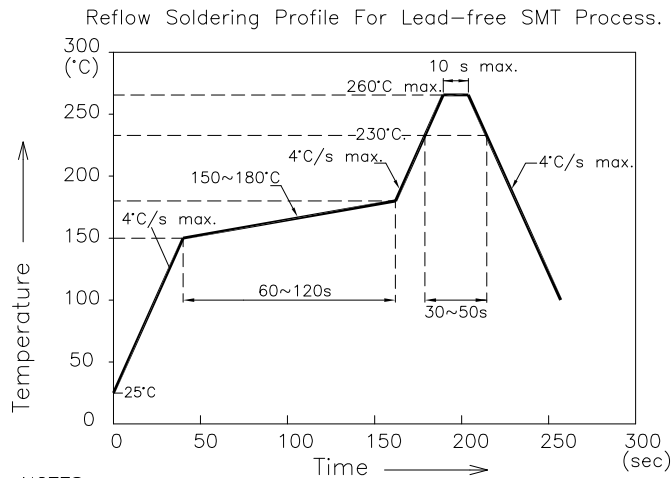


NOTES:

1. We recommend the reflow temperature 245°C(±5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

Recommended Soldering Pattern (Units : mm)

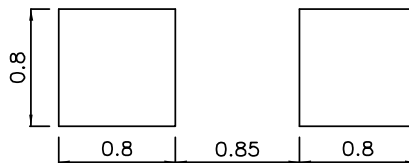

Tape Specifications (Units : mm)

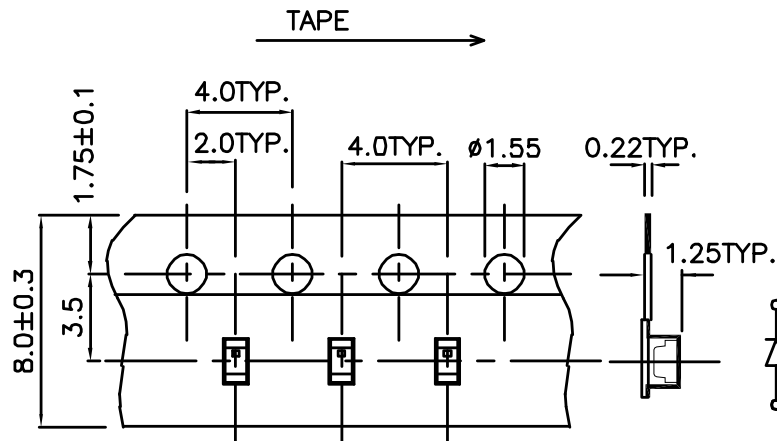

Remarks:

If special sorting is required (e.g. binning based on forward voltage or radiant intensity/ luminous flux), the typical accuracy of the sorting process is as follows:

1. Radiant Intensity/ luminous flux: +/-15%
2. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.