


Terminal block >> Din rail and Fuse Series

KLS2-510EW

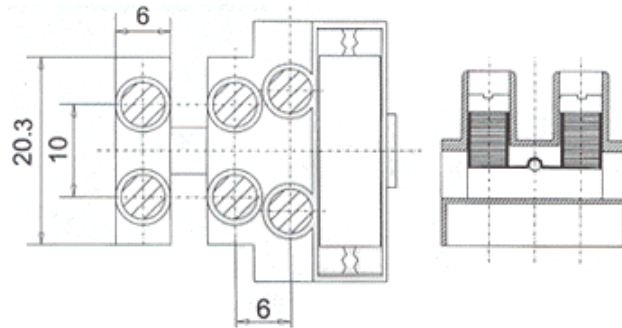

KLS2-510EW-3P

E:-With earth screw hole

W:-With wire protection

3P-Pins or 1P 2P 3P 4P 5P

Capability	
Rated voltage/Rated current	250V/10A
Wire range	18-12 AWG, 2.5 mm ²
Withstanding voltage	AC2500V/1Min
Insulation resistance	5000M Ω /DC1000V
Contact resistance	20 m Ω
Temp. Range	-40 $\text{ }^{\circ}\text{C}$ ~+105 $\text{ }^{\circ}\text{C}$
MAX Soldering	+250 $\text{ }^{\circ}\text{C}$ for 5 Sec
Torque	0.5Nm (4.5lb.in)
Strip length	7-8 mm
Specification	
Housing	PA66, UL94V-0
Screws	M3, steel, Zinc plated
Contact	Brass, Ni plated