

Product Specification

Number: L-KLS10-Y1-Y5V-472M500V-P10

Name: Safety Ceamic Capacitor

Specification: _____

Customer: B36

Date: 2021-01-26

Customer Signature:



NINGBO KLS ELECTRONIC CO; LTD

Tel : 0086-574-86828566

Fax : 0086-574-86824882

ADD : NO. 8-1, RONGXIA RD. XIAPU SHANQIAN
INDUSTRIAL ZONE BEILUN NINGBO ZHEJIANG.

Compile	Check	Review	Approval
Jenny	Jack.C		



安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor

编号	SPEC-002
版本	A
日期	2021-01-1
页码	1 / 17

目 录

1. 目的	2
2. 范围	2
3. 外观与尺寸	2
3.1. 尺寸	2
3.2. 标志说明	3
4. 特点	3
5. 普通特性	4
6. 型号命名方式	5
7. 规格表	6
8. 标准与试验方法	7
9. 包装	11
9.1. 编带包装规格	11
9.2. 包装规格	12
10. 测量和使用注意事项	13
10.1. 测量	13
10.2. 额定值	14
10.3. 贮存与使用条件	16
10.4. 焊锡和安装	16

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor

编号	SPEC-002
版本	A
日期	2021-01-1
页码	2 / 17

1. 目的

Purpose

制订本标准的目的是为了使双方在样品的电气特性、外观、尺寸上达成一致，便于以续交货产品的规格确认与验收。

In order to reach the recognition in the electrical characteristics and the appearance, the dimension when ensuring the samples and facilitate the specification and acceptance criteria of the follow-up goods, so we set down the standard.

2. 范围

Scope

本标准适用于下表规定的电容器。

This specification applies to the capacitors of following table:


No.	描述 Description	产品料号 Part number	客户料号 Customer P/N
1	Y1 472M 500VAC Y5V F10 E04	L-KLS10-Y1-Y5V-472M500V-P10	
2	(此行空白)		
3	(此行空白)		

3. 外观与尺寸

Appearance and Dimensions

本产品结构图如下所示，圆板型、蓝色，标示清晰可见，外观没有明显缺陷。

In this product, the structure drawing as follows, disc type, sky-blue, marking to be easily legible, no marked defect on appearance.

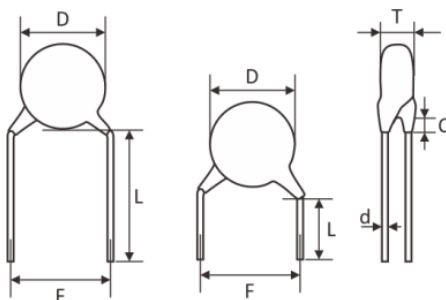

3.1. 尺寸 (单位: mm)

Dimensions (Unit: mm)

Part number	D (max)	T (max)	F (±0.8)	L (min)	C (max)	d (±0.05)
L-KLS10-Y1-Y5V-472M500V-P10	13.0	6.0	10.0	20.0	3.0	0.55
(此行空白)						
(此行空白)						

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor


编号	SPEC-002
版本	A
日期	2021-01-1
页码	3 / 17

3.2. 标志说明

Marking illustrate

本次送样产品的标志构成如下表所示：

The Marking of the product is shown in the following table:

产品料号 Part number	L-KLS10-Y1-Y5V-472M500V-P10	(空白)	(空白)
标志图形 Marking drawing	 <p>AR472M X1/Y1: 500V~ C51234</p>	(空白)	(空白)

注：标志最下一列（C51234）为产品 ID 号。




NOTE: The bottom row of the marking (C51234) is the product ID number.

4. 特点

Features

- 本产品符合 IEC 60384-14 标准要求，通过 UL、VDE、ENEC 和 CQC 安规认证。

This product meets the requirements of IEC 60384-14 and is certified by UL, VDE, ENEC and CQC

认证标志 Recognized approval mark	认证标准 Standards	额定电压 Rated voltage	认证证书号 Certificate number
	UL 60384-14	Y1:500V~ Y2:300V~	E334332
	DIN EN 60384-14(VDE 0565-1-1):2014-04 EN 60384-14:2013-08 IEC 60384-14(ed. 4)	Y1:500V~ Y2:300V~	Y1: 40046156 Y2: 40046155
	IEC 60384-14:2013	Y1:500V~ Y2:300V~	Y1: CQC17001165588 Y2: CQC17001165567

ENEC Signatories (Please refer to http://www.eepca.org/affiche_cbgroup.php?typ=1&soc=4)

AENOR (Spain)	EZU (Czech Republic)	NEMKO (Norway)	TUV SUD PS (Germany)
ASTA BEAB (United kingdom)	IMQ (Italy)	SGS Belgium (Belgium)	UL Int DEMKO (Demark)
BSI (United kingdom)	Intertek Semko (Sweden)	SGS FIMKO (Finland)	VDE (Germany)
CERTIF (Portugal)	KEMA (Netherlands)	SIQ (Slovenia)	OVE (Austria)
ELECTROSUISSE (Switzerland)	LCIE (France)	SNCH (Luxembourg)	
ELOT (Greece)	MEEI (Hungary)	TRPS (Germany)	

- 操作温度高达 125°C。

Operating temperature range guaranteed up to 125 degrees (UL: 85 deg.)

- 包封层为阻燃性级环氧树脂（符合 UL94 V-0 级），导线为 CP 线，内电极为银或铜，结构如图所示：


Coated with flame-retardant epoxy resin (conforming to UL94 V-0 standard), Lead with CP wire, inert metal copper or silver as a coating after the electrode, its structure follows

- 可适用于自动化生产线。

Cost-saving automatic insertion available

- 符合 RoHS 标准，无卤。

Comply with RoHS, Halogen-free available

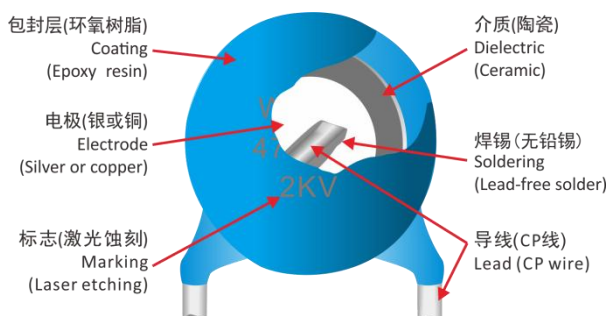

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor



5. 普通特性

General Specifications

类别 Subclass	Y1	Y2
容量范围 Capacitance Range	10pF ~ 0.0047uF	10pF ~ 0.01uF
额定电压 Rated Voltage	500Vac	300Vac
耐电压 Dielectric strength	使用 4000Vac(50Hz-60Hz, 电流小于 50mA)测量 1 分钟, 无异常 The capacitor should not be damaged when 4000Vac (50Hz-60Hz, 50mA max.) for 1 minute.	使用 2600Vac(50Hz-60Hz, 电流小于 50mA)测量 1 分钟, 无异常 The capacitor should not be damaged when 2500Vac (50Hz-60Hz, 50mA max.) for 1 minute.
电容量 Capacitance	在 25°C 环境下使用 1kHz 1.0Vrms (SL 使用 1MHz 或 100kHz) 的条件进行测量, 容量在允许误差范围内。 Within the specified tolerance. Y5P, Y5U, Y5V measured at 1kHz±20%, SL measured at 1MHz (100kHz) ±20%, Both are 1Vrms, 25°C	
损耗角正切 tanδ	SL: <30pF: $Q \geq 400 + 20C_R$ ≥30pF: $Q \geq 1000$ 测量条件同“电容量” Measured condition see “Capacitance”	Y5P, Y5U: 0.025 max. Y5V: 0.050 max.
绝缘电阻 Insulation resistance	使用 500VDC 测量 1 分钟, 绝缘电阻不小于 10 000 MΩ 10 000MΩ minimum at 500VDC for 1 minute.	
温度特性 Temperature characteristic	SL, Y5P, Y5U, Y5V	
气候类别 Climatic category	40/125/21B	

■ 温度特性典型曲线图

Temperature characteristic curves

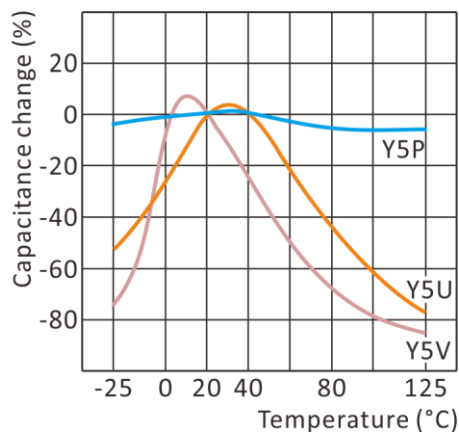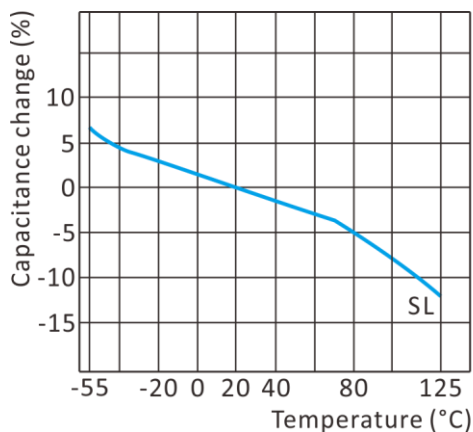

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor

编号	SPEC-002
版本	A
日期	2021-01-1
页码	5 / 17

6. 型号命名方式

Part Number

Y1	Y5V	472	M	500V	P10
(1)	(2)	(3)	(4)	(5)	(6)

① 产品类别 Product type

Y1 series, Y2 series.

② 温度特性 Temperature Characteristics

SL: SL, Y5P: B4, Y5U: E4, Y5V: F4 etc.

③ 标称容量 Nominal Capacitance

标称容量用三位数表示，单位为 PF，第一、二位为有效数字，第三位为前两位后面跟“0”的个数；当有小数点时，小数点用“R”表示；如 4.7pF 表示为 4R7、1000pF 表示为 102。

Nominal capacitance is expressed in 3-digit number, in Pico-Farads; The first two digits indicate significant digits.

The 3rd digit indicates the number of zero following. R denotes decimal. Ex, 4.7pF is 4R7, 1000pF is 102.

④ 容量误差 Capacitance Tolerance

J: ±5%, K: ±10%, M: ±20% etc.

⑤ 额定电压 Rated Voltage

2E: 250Vac, 2F: 300Vac, 2G: 400Vac; 2H: 500Vac etc.

⑥ 脚距 Lead spacing

Code	P5	P6.4	P7.5	P10	P12.5
脚距 Lead spacing	5.0mm	6.4mm	7.5mm	10mm	12.5mm

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor

编号 SPEC-002


版本 A

日期 2021-01-1

页码 6 / 17

7. 规格表

Specification list

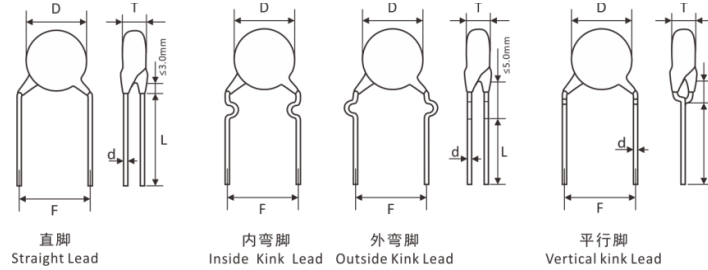

类别 Class	Y2				Y1			
温度特性 T. C.	SL	Y5P	Y5U	Y5V	SL	Y5P	Y5U	Y5V
误差 Tolerance (%)	±5% (J)	±10% (K)	±20% (M)	±20% (M)	±5% (J)	±10% (K)	±20% (M)	±20% (M)
容量 Cap. (pF)								
10	E				E			
12	E				E			
15	F				F			
18	F				G			
20	F				G			
22	F				G			
24	G				G			
27	H				I			
30	H				E			
33	E				E			
36	E				E			
39	E				F			
43	E				F			
47	F				G			
51	F				G			
56	G				H			
62	G				H			
68	H				I			
75	I				I			
82	I				J			
91	J				K			
100	J	E			K	E		
120		E				E		
150		E				E		
180		E				E		
220		E				E		
270		E				F		
330		E				G		
390		E				G		
470		F	E			H	E	
560		G	E			I	E	
680		H	E			J	G	
820		J	E			K	G	
1 000		J	F	E		L	H	E
1 500			H	F			J	G
2 200			J	G			L	J
3 300			L	H			N	K
4 700			N	K			P	M
5 600				K				
6 800				M				
10 000				O				
T, mm max	4.5	4.5	5.0	5.0	5.0	5.5	5.5	5.5
F, ±0.8mm	5.0 / 7.5	5.0 / 7.5	7.5 / 10.0	7.5 / 10.0	7.5 / 10.0	10.0	10.0	10.0
D, ±0.1mm	0.55	0.55	0.60	0.60	0.55	0.60	0.60	0.60
L, mm min.	20.0 (脚长可以根据客户需求订制, Lead length by customer requirements)							

代码 Code	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
D, mm max	6.5	7.0	7.5	8.0	8.5	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	18.0

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor


编号	SPEC-002
版本	A
日期	2021-01-1
页码	7 / 17

8. 标准与试验方法


Specifications and Testing Method

序 No.	项目 Item	标准 Specifications	试验方法 Testing Method
1	外观与尺寸 Appearance and Dimension	外观形状没有明显的缺点, 尺寸在标准范围内。 No marked defect on appearance form and dimensions are within specified range.	电容必须用目视检查其明显的缺点。 The capacitor should be visually inspected for evidence of defect. 尺寸用游标卡尺测量。 Dimensions should be measured with slide calipers.
2	标志 Marking	清晰易于识别。 To be easily legible	目视检查。 The capacitor should be visually inspected.
3	容量 (C _R) Capacitance (C _R)	在误差范围内。 Within specified tolerance	容量与损耗(Q值)在25±1°C下, 使用1kHz(SL使用1MHz或100kHz)和1Vrms下测量。 The capacitance, tanδ (Q value) should be measured at 25°C ± 1°C with 1kHz (SL: 1MHz or 100kHz) and AC1.0V (r.m.s.).
4	损耗角正切或 Q 值 tanδ or Q value	SL, <30pF: Q≥400+20C _R ≥30pF: Q≥1000 Y5P, Y5U: <0.025 Y5V: <0.050	
5	绝缘电阻 Insulation Resistance	>10 000MΩ	在两导线间施加 500VDC 进行测量, 时间不超过 1 分钟 (如果绝缘电阻达到要求值时, 试验可以在更短的时间内结束)。 The insulation resistance should be measured with a DC 500V at normal temperature and humidity and less than 1 min. of charging (The test may be terminated in a shorter time, if the required value of insulation resistance is reached). 测试电压应用在电容时必须通过1MΩ的电阻。 The voltage should be applied to the capacitor through a resistor of 1MΩ.
6	导线间 Between Lead Wires	无失效。 No failure	在电容器两导线间施加下表测试电压60s后不被破坏(充/放电流不大于50mA)。 The capacitor should not be damaged when test voltages of following table are applied between the lead wires for 60 sec. (Charge/Discharge current ≤50mA)
	本体绝缘 Body Insulation	无失效。 No failure	首先, 将电容器的端子拧在一起, 然后如右图所示, 将金属箔包住电容器离端子3-4mm的本体, 接着将电容器插入盛着直径为1mm的金属球的容器中, 最后施加如下表所示的AC电压60秒钟。 First, the terminals of the capacitor should be connected together. Then, as shown in figure at right, a metal foil should be closely wrapped around the body of the capacitor to the distance of about 3 to 4mm from each terminal. Then, the capacitor should be inserted into a container filled with metal balls of about 1mm diameter. Finally, AC voltage of following table is applied for 60 sec. between the capacitor lead wires and metal balls.
7	导线抗张强度 Terminal Tensile Strength	导线无折断, 电容无破损。 Lead wire should not be cut off. Capacitor should not be broken.	如右图所示, 固定电容器的本体, 使电容器每支导线均承受10N垂直力, 保持10±1秒钟。 As shown in the figure at right, fix the body of the capacitor and apply a tensile weight gradually to each lead wire in the radial direction of the capacitor up to 10N and keep it for 10±1 sec.
8	导线抗折强度 Terminal Bending Strength	导线无折断, 电容无破损。 Lead wire should not be cut off. Capacitor should not be broken.	电容器导线应承受5N重量, 然后向外弯折成90°, 然后回复到原来位置; 接着往反方向弯折90°, 再复原; 弯折一次2-3秒钟。 Each lead wire should be subjected to 5N weight and then a 90° bend, at the point of egress, in one direction, return to original position, and then apply a 90° bend in the opposite direction at the rate of one bend in 2 to 3 sec.

类型 Type	WAB	WAR
耐电压 Voltage proof	AC2600V	AC4000V



类型 Type	WAB	WAR
耐电压 Voltage proof	AC2600V	AC4000V



安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor

编号 SPEC-002

版本 A

日期 2021-01-1

页码 8 / 17

☑ 接上页 Continued from the preceding page

序号 No.	项目 Item	标准 Specifications	试验方法 Testing Method												
9	可焊性 Solderability of Leads	导线必须有3/4以上的面积均匀附着焊锡。 Lead wire should be soldered with uniform coating on the axial direction over 3/4 of the circumferential direction.	将电容器的导线浸入焊料中 2 ± 0.5 秒钟，浸入深度离导线根部1.5-2.0mm。 The lead wire of a capacitor should be dipped into molten solder for 2 ± 0.5 sec. The depth of immersion is up to about 1.5 to 2.0mm from the root of lead wires. 焊锡温度：无铅焊锡 (Sn-3Ag-0.5Cu) $245\pm 5^{\circ}\text{C}$ 易溶解的H63号锡 (Pb37/Sn63) $235\pm 5^{\circ}\text{C}$ Temp. of solder: Lead Free Solder (Sn-3Ag-0.5Cu) $245\pm 5^{\circ}\text{C}$ H63 Eutectic Solder (Pb37/Sn63) $235\pm 5^{\circ}\text{C}$												
10	耐焊接热 Soldering Effect	外观 App. 没有可见损伤 No marked defect 容量变化率 $\Delta C/C$ SL: $\pm 5\%$ or 1pF, whichever is large (取较大值). Y5P: $\pm 10\%$ Y5U, Y5V: $\pm 20\%$ 绝缘电阻 I.R. $> 1\ 000\text{M}\Omega$ 耐电压 V.P. 如第6项 Per Item 6	如图所示，导线浸入离导线根部1.5-2.0mm处、锡温为 $260\pm 5^{\circ}\text{C}$ 锡槽中 10 ± 1 秒。 As shown in figure, the lead wires should be immersed in solder of $260\pm 5^{\circ}\text{C}$ up to 1.5 to 2.0mm from the root of terminal for 10 ± 1.0 sec.  预处理Pre-treatment: 电容器必须先贮存在 $85\pm 2^{\circ}\text{C}$ 条件下1小时，然后在室温下存放 24 ± 2 小时，再进行初始测量。 Capacitor should be stored at $85\pm 2^{\circ}\text{C}$ for 1 hr., and then placed at room condition for 24 ± 2 hrs. before initial measurements. 试验后处理Post-treatment: 电容必须存放在室温下1-2小时。 Capacitor should be stored for 1 to 2 hrs. at room condition.												
11	振动 Vibration Resistance	外观 App. 没有可见损伤 No marked defect 容量 Cap. 在允许误差范围 Within the specified tolerance 损耗 $\tan\delta$ 如第4项 Per Item 4	将电容器导线焊稳和调整振动频率范围为10-55Hz、总振幅为1.5mm，振动从10Hz到55Hz，然后再回到10Hz，大约一分钟。 The capacitor should be firmly soldered to the supporting lead wire and vibrated at a frequency range of 10 to 55Hz, 1.5mm in total amplitude, with about a 1 minute rate of vibration change from 10Hz to 55Hz and back to 10Hz. 总时间六个小时，每两小时在相互垂直方向来回三次。 Apply for a total of 6 hrs., 2 hrs each in 3 mutually perpendicular directions.												
12	温度特性 Temperature Characteristics	Y5P: Within $\pm 10\%$ Y5U: Within $+22/-56\%$ Y5V: Within $+22/-82\%$ SL: $+350$ to $-1\ 000\text{ppm}/^{\circ}\text{C}$	电容器必须按照下表中的每一步骤进行测量。 The capacitance measurement should be made at each step specified in following table. <table border="1" data-bbox="893 1411 1308 1635"> <thead> <tr> <th>阶段 Step</th> <th>温度 ($^{\circ}\text{C}$) Temperature ($^{\circ}\text{C}$)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>$+25\pm 2$</td> </tr> <tr> <td>2</td> <td>-25 ± 2</td> </tr> <tr> <td>3</td> <td>$+25\pm 2$</td> </tr> <tr> <td>4</td> <td>$+85\pm 2$</td> </tr> <tr> <td>5</td> <td>-25 ± 2</td> </tr> </tbody> </table>	阶段 Step	温度 ($^{\circ}\text{C}$) Temperature ($^{\circ}\text{C}$)	1	$+25\pm 2$	2	-25 ± 2	3	$+25\pm 2$	4	$+85\pm 2$	5	-25 ± 2
阶段 Step	温度 ($^{\circ}\text{C}$) Temperature ($^{\circ}\text{C}$)														
1	$+25\pm 2$														
2	-25 ± 2														
3	$+25\pm 2$														
4	$+85\pm 2$														
5	-25 ± 2														
13	耐湿负荷 Humidity Loading	外观 App. 没有可见损伤 No marked defect 容量变化率 $\Delta C/C$ SL: $\pm 5\%$ or 1pF, whichever is large (取较大值). Y5P: $\pm 10\%$ Y5U, Y5V: $\pm 15\%$ 损耗 $\tan\delta$ SL, $< 30\text{pF}$: $Q\geq 275+5/2C_R$ $\geq 30\text{pF}$: $Q\geq 350$ Y5P, Y5U: < 0.050 Y5V: < 0.075 绝缘电阻 I.R. $> 3\ 000\text{M}\Omega$ 耐电压 V.P. 如第6项 Per Item 6	电容保持在温度为 $40\pm 2^{\circ}\text{C}$ 、相对湿度为90-95%条件下施加额定电压 500 ± 12 小时。 Apply the rated voltage for 500 ± 12 hrs. at $40\pm 2^{\circ}\text{C}$ in 90 to 95% relative humidity. 试验后处理: Post-treatment: 电容必须贮存在室温条件下一至二小时。 Capacitor should be stored for 1 to 2 hrs. at room condition.												

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor






编号 SPEC-002

版本 A

日期 2021-01-1

页码 9 / 17

接上页 Continued from the preceding page

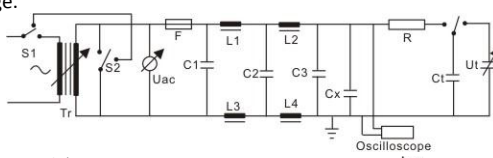序号 No.	项目 Item	标准 Specifications	试验方法 Testing Method						
14	外观 App.	没有可见损伤 No marked defect	<p>尖峰电压 Impulse Voltage 每个供试验电容必须承受5kV (Y1为8kV) 尖峰电压三次, 然后再进行寿命试验。 Each individual capacitor should be subjected to a 5kV (8kV for Y1) impulses for three times. After the capacitors are applied to life test.</p>  <p>在125±2/-0°C和相对湿度不超过50%的条件下使用下表所要求的电压进行1000小时。 Apply a voltage of following table for 1000 hrs. at 125±2/-0°C, and relative humidity of 50% max.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="2">应用电压 Applied Voltage</th> </tr> </thead> <tbody> <tr> <td>AC525V (Y1使用AC875V), 另在每小时将电压增加AC1000V, 时间0.1秒。</td> <td>AC525V (AC875V for Y1), except that once each hour the voltage is increased to AC1000V(r.m.s.) for 0.1 sec.</td> </tr> </tbody> </table> <p>试验后处理 Post-treatment: 电容必须贮存在室温条件下一至二小时。 Capacitor should be stored for 1 to 2 hrs. at *room condition.</p>	应用电压 Applied Voltage		AC525V (Y1使用AC875V), 另在每小时将电压增加AC1000V, 时间0.1秒。	AC525V (AC875V for Y1), except that once each hour the voltage is increased to AC1000V(r.m.s.) for 0.1 sec.		
	应用电压 Applied Voltage								
	AC525V (Y1使用AC875V), 另在每小时将电压增加AC1000V, 时间0.1秒。	AC525V (AC875V for Y1), except that once each hour the voltage is increased to AC1000V(r.m.s.) for 0.1 sec.							
	容量变化率 ΔC/C	SL: ±5% or 1pF, whichever is large (取较大值). Y5P: ±10% Y5U, Y5V: ±15%							
绝缘电阻 I.R.	>3 000MΩ								
耐电压 V.P.	如第6项 Per Item 6								
15	针焰试验 Flame Test	<p>电容离开火焰后自动熄灭。 The capacitor flame discontinues as follows.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>周期 Cycle</th> <th>时间 (秒) Time (sec.)</th> </tr> </thead> <tbody> <tr> <td>1 to 4</td> <td>30</td> </tr> <tr> <td>5</td> <td>60</td> </tr> </tbody> </table>	周期 Cycle	时间 (秒) Time (sec.)	1 to 4	30	5	60	<p>电容应放在火焰中15秒钟, 然后离开15秒钟, 如此重复5次。 The capacitor should be subjected to applied flame for 15 sec. and then removed for 15 sec. until 5 cycles are completed.</p> 
周期 Cycle	时间 (秒) Time (sec.)								
1 to 4	30								
5	60								
16	自燃性 Active Flammability	纱布不着火 The cheese-cloth should not be on fire.	<p>单个电容器应用纱布全部包住至少一层, 但不多于两层。电容应承受放电20次, 每次放电间隔5秒钟。AC电源应维持两分钟, 最后放电。 The capacitor should be individually wrapped in at least one but not more than two complete layers of cheese-cloth. The capacitor should be subjected to 20 discharges. The interval between successive discharges should be 5 sec. The UAC should be maintained for 2 min. after the last discharge.</p>  <p>C1, 2: 1uF±10% C3: 0.033uF±5% 10KV Ct: 3uF±5% 10KV Cx: 供试验电容 Capacitor under test F: 额定 10A 的慢熔断保险丝 Fuse, Rated 10A R: 100Ω±5% Ur: 额定电压 Rated Voltage Ut: 施加在储能电容器 Ct 上的电压 Voltage applied to Ct.</p> <p>L1 to 4: 1.5mH±20% 16A 棒状磁芯的扼流圈 1.5mH±20% 16A Rod core choke</p> 						
17	阻燃性 Passive Flammability	<p>燃烧时间不超过30秒, 棉纸不被点燃。 The burning time should not exceed 30 sec. The tissue paper should not ignite.</p>	<p>电容器在下面试验中, 火焰在适当的位置被最大燃烧, 各个试验样品应只承受一次燃烧, 燃烧时间: 30秒钟。 The capacitor under test should be held in the flame in the position which best promotes burning. Each specimen should only be exposed once to the flame. Time of exposure to flame: 30 sec.</p>  <p>火焰长度: 12±1mm Length of flame: 12±1mm 煤气火焰: 长度不小于 35mm, 内部直径 0.5±0.1mm, 外部直径不小于 0.9mm, Gas burner: Length 35mm min., inside Dia. 0.5±0.1mm, outside Dia. 0.9mm max. 煤气: 丁烷煤气纯度 95%以上 Gas: Butane gas Purity 95% min.</p>						

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor

编号 SPEC-002

版本 A

日期 2021-01-1

页码 10 / 17

☑ 接上页 Continued from the preceding page

序 No.	项目 Item	标准 Specifications	试验方法 Testing Method																											
18	外观 App.	没有可见损伤 No marked defect	<p>电容器应承受五次温度循环，然后连续交替循环两次。 The capacitor should be subjected to 5 temperature cycles, then consecutively to 2 immersion cycles.</p> <p style="text-align: center;">温度循环 Temperature Cycle</p> <table border="1"> <thead> <tr> <th>阶段 Step</th> <th>温度(°C) Temperature (°C)</th> <th>时间(分钟) Time (min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-25+0/-3</td> <td>30</td> </tr> <tr> <td>2</td> <td>室温 Room temp.</td> <td>3</td> </tr> <tr> <td>3</td> <td>125+3/-0</td> <td>30</td> </tr> <tr> <td>4</td> <td>室温 Room temp.</td> <td>3</td> </tr> </tbody> </table> <p style="text-align: center;">交替循环 Immersion Cycle</p> <table border="1"> <thead> <tr> <th>阶段 Step</th> <th>温度(°C) Temp. (°C)</th> <th>时间(分钟) Time (min)</th> <th>浸水 Immersion Water</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>65+5/-0</td> <td>0±3</td> <td>纯水 Clean water</td> </tr> <tr> <td>2</td> <td>15</td> <td>15</td> <td>盐水 Salt Water</td> </tr> </tbody> </table> <p>预处理 Pre-treatment: 电容器必须先贮存在85±2°C条件下1小时，然后在室温下存放24±2小时，再进行初始测量。 Capacitor should be stored at 85±2°C for 1 hr., then placed at room condition for 24±2 hrs.</p> <p>试验后处理 Post-treatment: 电容必须贮存在室温条件下24±2小时。 Capacitor should be stored for 24±2 hrs. at room condition.</p>	阶段 Step	温度(°C) Temperature (°C)	时间(分钟) Time (min)	1	-25+0/-3	30	2	室温 Room temp.	3	3	125+3/-0	30	4	室温 Room temp.	3	阶段 Step	温度(°C) Temp. (°C)	时间(分钟) Time (min)	浸水 Immersion Water	1	65+5/-0	0±3	纯水 Clean water	2	15	15	盐水 Salt Water
	阶段 Step	温度(°C) Temperature (°C)		时间(分钟) Time (min)																										
	1	-25+0/-3		30																										
	2	室温 Room temp.		3																										
	3	125+3/-0		30																										
4	室温 Room temp.	3																												
阶段 Step	温度(°C) Temp. (°C)	时间(分钟) Time (min)	浸水 Immersion Water																											
1	65+5/-0	0±3	纯水 Clean water																											
2	15	15	盐水 Salt Water																											
容量变化率 ΔC/C	SL: ±5% or 1pF, whichever is large (取较大值). Y5P: ±10% Y5U, Y5V: ±15%																													
损耗 tanδ	如第4项 Per Item 4																													
绝缘电阻 I.R.	>3 000MΩ																													
耐电压 V.P.	如第6项 Per Item 6																													


安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor


9. 包装 Packaging

9.1. 编带包装规格 Taping specifications


- Fig 1: $F \leq 7.5\text{mm}$ $P = 12.7\text{mm}$, or $F \leq 10.0\text{mm}$ $P = 15.0\text{mm}$

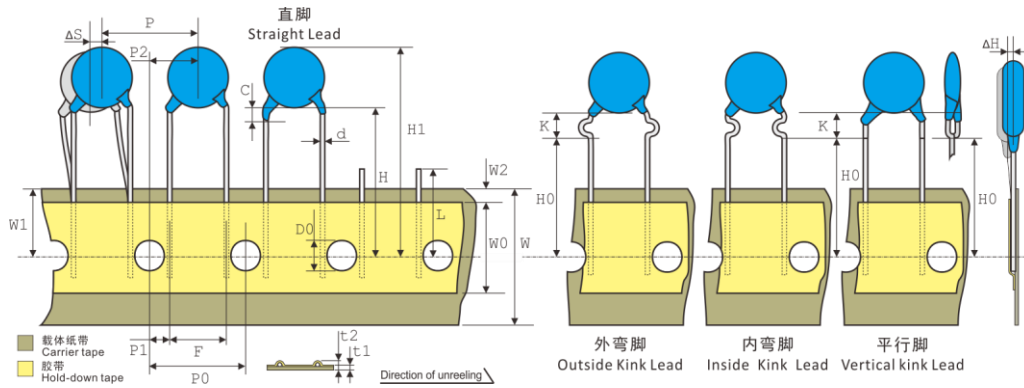

- Fig 2: $F \leq 10.0\text{mm}$ $P = 30.0\text{mm}$

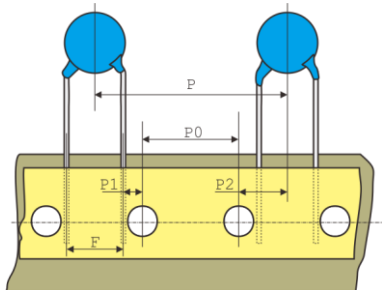

- Fig 3: $F \leq 10.0\text{mm}$ $P = 25.4\text{mm}$



Item	Specifications (mm)										Tolerance (mm)
	Fig 1					Fig 2		Fig 3			
F	5.00	6.40	7.50	7.50	10.00	7.50	10.00	7.50	10.00		±0.80
P	12.70	12.70	12.70	15.00	15.00	30.00	30.00	25.40	25.40		±1.00
P0	12.70	12.70	12.70	15.00	15.00	15.00	15.00	12.70	12.70		±0.30
P1	3.85	3.15	2.60	3.75	2.50	3.75	2.50	3.75	5.00		±0.70
P2	6.35	6.35	6.35	7.50	7.50	7.50	7.50	12.70	12.70		±1.30

Item	W	W0	W1	W2	H	H0	H1	d	D0	t1	t2	L	C	K	Δh	ΔS
Spec.	18.00	7.00	9.00	3.00	18.00	16.00	40.00	0.60	4.00	0.9.0	1.50	11.00	3.00	5.00	2.00	1.30
Tol.	+1.00 -0.50	min.	+0.75 -0.50	max.	+2.00 -0	±0.50	max.	±0.10	±0.30	max.	max.	max.	max.	max.	max.	max.

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor

编号	SPEC-002
版本	A
日期	2021-01-1
页码	12 / 17

9.2. 包装规格

Packing specifications



- 散件包装

Bulk packing

类别 Subclass	脚长 Lead Length	产品直径 Body diameter	最小包装数量 Minimum packaging quantity
Y1	≤16mm	All	500
	>16mm	≤8.5mm	1 000
		>8.5mm	500
Y2	≤16mm	All	500
	>16mm	≤8.5mm	1 000
		>8.5mm	500

- 编带包装

Taping packing

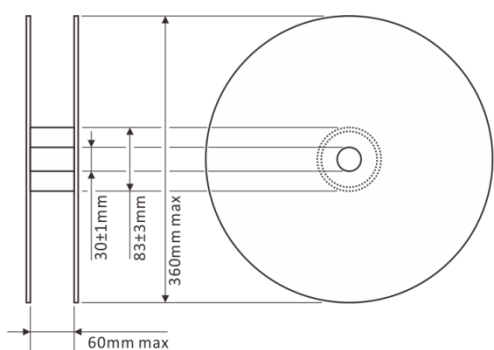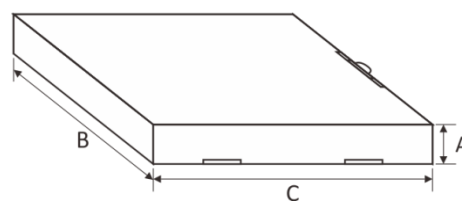包装方式 Packaging Format	卷盘包装(每卷) Reel Packing (per Reel)	折叠包装(每盒) Ammo Packing (per Box)									
尺寸(mm) 与 示意图 Dimensions (mm) and Drawing		 <table border="1" data-bbox="957 1321 1356 1444"> <thead> <tr> <th>A</th> <th>B</th> <th>C</th> </tr> </thead> <tbody> <tr> <td>43±2mm</td> <td>256±5mm</td> <td>333±5mm</td> </tr> <tr> <td>48±2mm</td> <td>288±5mm</td> <td>333±5mm</td> </tr> </tbody> </table>	A	B	C	43±2mm	256±5mm	333±5mm	48±2mm	288±5mm	333±5mm
A	B	C									
43±2mm	256±5mm	333±5mm									
48±2mm	288±5mm	333±5mm									
包装数量(pcs) Quantity (pcs)	500 1 000 1 500	500 1 000									

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor

编号 SPEC-002

版本 A

日期 2021-01-1

页码 13 / 17

10. 测量和使用注意事项

Measuring and Application Notice

10.1. 测量, Measurement

请在以下条件下测量。

Please measure under the following conditions.

10.1.1. 标准大气条件, Standard atmospheric conditions

除非另有规定,所有试验和测量应按在 IEC 60068-1 的 5.3 中规定的试验用标准大气条件下表进行。

Unless otherwise specified, all tests and measurements shall be made under standard atmospheric conditions for testing as given in 5.3 of IEC 60068-1.

温度, °C Temperature	相对湿度, % Relative humidity	气压, kPa Air pressure
15~35	25~75	86~106

在进行测量之前,电容器应在测量温度下存放足够时间,以使整个电容器都达到这一温度。为此目的,规定与试验后恢复时间同样的时间,通常是足够的。

Before the measurements are made, the capacitor shall be stored at the measuring temperature for a time sufficient to allow the entire capacitor to reach this temperature. The period as prescribed for recovery at the end of a test is normally sufficient for this purpose.

在标准大气条件下进行测量,其测量结果存在争议时应采用仲裁温度(见 1.3)重复测量。

Test and measurement shall be made under standard atmospheric conditions for testing, in the event of a dispute, the measurements shall be repeated using one of the referee temperatures (as given in 1.3).

当按某一顺序进行试验时,一个试验的最后测量可以作为下一试验的初始测量。

When tests are conducted in a sequence, the final measurements of one test may be taken as the initial measurements for the succeeding test.

在测量期间,不应使电容器受到气流、阳光直射或可能引起误差的其他影响。

During measurements the capacitor shall not be exposed to draughts, direct sunlight or other influences likely to cause error.

10.1.2. 恢复条件, Recovery conditions

除非另有规定,恢复应在试验用标准大气条件(见 1.1)下进行。

Unless otherwise specified recovery shall take place under the standard atmospheric conditions for testing (1.1).

如果恢复必须在严格控制的条件下进行,应采用 IEC 60068-1 中 5.4.1 的控制条件。

If recovery under closely controlled conditions is necessary, the controlled recovery conditions of 5.4.1 of IEC 60068-1 shall be used.

除非有关规范另有规定,恢复时间应为 1h~2h。

Unless otherwise specified in the relevant specification, a duration of 1 h to 2 h shall be used.

10.1.3. 仲裁条件, Referee conditions

在仲裁情况下,应选用 IEC 60068-1 中 5.2 中规定的仲裁试验用标准大气条件。

For referee purposes, one of the standard atmospheric conditions for referee tests taken from 5.2 of IEC 60068-1, as given in table 1 below, shall be selected:

温度, °C Temperature	相对湿度, % Relative humidity	气压, kPa Air pressure
25±1	48~52	86~106

安规陶瓷电容器规格书





Product Specifications for Safety Ceramic Capacitor

10.2. 额定值, Rating

10.2.1. 工作电压, Operating Voltage

在交流电路或纹波电路中使用直流额定电压电容器时, 请务必将外加电压的 V_{p-p} 值或包含直流偏置电压的 V_{o-p} 值维持在额定电压范围内。若向电路施加电压, 开始或停止时可能会因谐振或切换产生暂时的异常电压。请务必使用额定电压范围包含这些异常电压的电容器。

When DC-rated capacitors are to be used in AC or ripple current circuits, be sure to maintain the V_{p-p} value of the applied voltage or the V_{o-p} which contains DC bias within the rated voltage range. When the voltage is applied to the circuit, starting or stopping may generate irregular voltage for a transit period because of resonance or switching. Be sure to use a capacitor with a rated voltage range that includes these irregular voltages.

电压 Voltage	直流电压 DC Voltage	直流+交流电压 DC+AC Voltage	交流电压 AC Voltage	脉冲电压 Pulse Voltage
测量位置 Positional Measurement				

10.2.2. 工作温度与自生热, Operating Temperature and Self-generated Heat

适用于 Y5P、Y5U、Y5V 特性。

Apply to Y5P/Y5U/Y5V Char.

电容器的表面温度应保持在额定工作温度范围的上限以下。务必考虑到电容器的自生热。电容器在高频电流、脉冲电流等使用时可能会因介电损耗发出自生热。外加电压应使自生热等负荷在 25°C 周围温度条件下不超过 20°C 范围。测量时应使用 $\phi 0.1\text{mm}$ 小热容量 (K) 的热电偶, 而且电容器不应受到其它元件的散热或环境温度波动影响。过热可能会导致电容器特性及可靠性下降。(切勿在冷却风扇运转时进行测量。否则无法确保测量数据的精确性。)

Keep the surface temperature of a capacitor below the upper limit of its rated operating temperature range. Be sure to take into account the heat generated by the capacitor itself. When the capacitor is used in a high frequency current, pulse current or similar current, it may have self-generated heat due to dielectric loss. Applied voltage load should be such that self-generated heat is within 20°C under the condition where the capacitor is subjected at an atmosphere temperature of 25°C. When measuring, use a thermocouple of small thermal capacity-K of $\phi 0.1\text{mm}$ under conditions where the capacitor is not affected by radiant heat from other components or wind from surroundings. Excessive heat may lead to deterioration of the capacitor's characteristics and reliability. (Never attempt to perform measurement with the cooling fan running. Otherwise, accurate measurement cannot be ensured.)

10.2.3. 耐电压的测试条件, Test Condition for Withstanding Voltage

1) 测试设备, Test Equipment

交流耐压的测试设备应具有能够产生类似于 50/60Hz 正弦波的性能。如果施加变形的正弦波或超过规定电压值的过载电压后, 则可能会导致故障。

Test equipment for AC withstanding voltage should be used with the performance of the wave similar to 50/60Hz sine wave. If the distorted sine wave or overload exceeding the specified voltage value is applied, a defect may be caused.

2) 电压外加方法, Voltage Applied Method

使用耐电压时, 电容器的引线或端子应对耐电压测试设备的输出端连接牢固; 然后再将电压从近零增加到测试电压。

When the withstanding voltage is applied, capacitor's lead or terminal should be firmly connected

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor

编号	SPEC-002
版本	A
日期	2021-01-1
页码	15 / 17

to the output of the withstanding voltage test equipment, and then the voltage should be raised from near zero to the test voltage.

如果测试电压不从近零逐渐提高而是直接施加在电容器上，则施加时应包含过零点。测试结束时，测试电压应降到近零；然后再将电容器引线或端子从耐电压测试设备的输出端取下。


If the test voltage without the raise from near zero voltage would be applied directly to capacitor, test voltage should be applied with the zero cross. At the end of the test time, the test voltage should be reduced to near zero, and then capacitor's lead or terminal should be taken off the output of the withstanding voltage test equipment.

如果测试电压不从近零逐渐提高而是直接施加在电容器上，则可能会出现浪涌电压，从而导致故障。

If the test voltage without the raise from near zero voltage would be applied directly to capacitor, the surge voltage may arise, and therefore, a defect may be caused.

过零点是指电压正弦通过 0V 的位置。参见右图。

ZERO CROSS is the point where voltage sine wave passes 0V. See figure at right.



10.2.4. 失效安全性, Fail-Safe

电容器损坏时，失效可能会导致短路。为了避免在短路时引起触电、冒烟、火灾等危险情况，请在电路中使用熔丝等元件来设置自动防故障功能。

When capacitor would be broken, failure may result in a short circuit. Be sure to provide an appropriate fail-safe function like a fuse on your product if failure would result in an electric shock, fire or fuming.

10.2.5. 电容器容量变化, Capacitance change of capacitors

1) SL 特性, In case of SL char.

电容量可能会因环境温度或外加电压而发生轻微变化。若要将本产品用于严格的时间常数电路，请与我司联系。

Capacitance might change a little depending on a surrounding temperature or an applied voltage. Please contact us if you use for the strict constant time circuit.

2) Y5P、Y5U、Y5V 特性, In case of Y5P/Y5U/Y5V char.

电容器具有老化特性；因此，电容器若长时间使用，其静电容量会逐渐降低。而且，静电容量还可能会因环境温度或外加电压而发生巨大变化。所以不适合用于时间常数电路。

Capacitors have an aging characteristic, whereby the capacitor continually decreases its capacitance slightly if the capacitor is left on for a long time. Moreover, capacitance might change greatly depending on the surrounding temperature or an applied voltage. So, it is not likely to be suitable for use in a constant time circuit.

若需详情，请与我司联系。

Please contact us if you need detailed information.

10.2.6. 使用设备进行性能检查, Performance check by equipment

使用电容器之前，请先检查设备的性能和特性没有问题。

Before using a capacitor, check that there is no problem in the equipment's performance and the specifications.

一般而言，二类瓷（Y5P、Y5U、Y5V 特性）陶瓷电容器的静电容量具有电压相关特性和温度相关特性。所以，其电容值可能会随设备的工作条件而发生变化。因此，一定要确认仪器接收性能对电容器的静电容量值变化的影响，如漏电流和静噪特性。

安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor

编号	SPEC-002
版本	A
日期	2021-01-1
页码	16 / 17

Generally speaking, CLASS 2 (B/E/F char.) ceramic capacitors have voltage dependence characteristics and temperature dependence characteristics in capacitance. So, the capacitance value may change depending on the operating condition in the equipment. Therefore, be sure to confirm the apparatus performance of receiving influence in the capacitance value change of a capacitor, such as leakage current and noise suppression characteristic.

此外，必要时还要检查电容器在设备中的防电涌性能，因为通过电路的感应，浪涌电压可能会超过规定值。

Moreover, check the surge-proof ability of a capacitor in the equipment, if needed, because the surge voltage may exceed specific value by the inductance of the circuit.

10.3. 贮存与使用条件， Operating and storage environment

电容器绝缘包封层不是完美的密封形式，因此，请勿将电容器存放在腐蚀性气体中，尤其是存在氯气、硫气、酸、碱、盐等场所，同时应防潮。

The insulating coating of capacitors does not form a perfect seal; therefore, do not use or store capacitors in a corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. And avoid exposure to moisture.

在对本产品进行清洗、焊接或成型前，请先在指定设备上测试经清洗、焊接或成型的产品的性能，以确定上述过程不会影响产品质量。

Before cleaning, bonding, or molding this product, verify that these processes do not affect product quality by testing the performance of a cleaned, bonded or molded product in the intended equipment.

电容器应存放在温度及相对湿度分别不超出-10~40°C 及 15~85%范围的场所。请在 6 个月内使用电容器。

Store the capacitors where the temperature and relative humidity do not exceed 5 to 40 degrees centigrade and 20 to 70%. Use capacitors within 6 months after delivered.

10.4. 焊锡和安装， Soldering and Mounting

10.4.1. 振动与碰撞， Vibration and Impact

使用时请勿使电容器受到过度冲击或振动。

Do not expose a capacitor or its leads to excessive shock or vibration during use.

10.4.2. 焊锡， Soldering

当在 PCB/PWB 焊锡这个产品时，不要超过电容器的焊锡耐热性标准（260°C， 3s）。过度的热量会使电容器内部焊锡熔化，可能导致热冲击而使陶瓷介质出现暗裂。

When soldering this product to a PCB/PWB, do not exceed the solder heat resistance specifications (260°C, 3s) of the capacitor. Subjecting this product to excessive heating could melt the internal junction solder and may result in thermal shocks that can crack the ceramic element.

当使用烙铁进行手工焊锡时，应该遵照下列条件：

When soldering capacitor with a soldering iron, it should be performed in the following conditions.

焊锡温度：320°C 最大

Temperature of iron-tip: 320 degrees C. max.

烙铁头：不超过 40W

Soldering iron wattage: 40W max.

焊锡时间：不超过 3.0 秒

Soldering time: 3.0 sec. max.



安规陶瓷电容器规格书

Product Specifications for Safety Ceramic Capacitor

编号	SPEC-002
版本	A
日期	2021-01-1
页码	17 / 17

10.4.3. 压焊、树脂涂层与包封, Bonding, Resin Molding and Coating

在压焊、树脂涂层和封膜之前, 请先使用指定设备确认对产品没有影响, 然后再进行使用。

Before bonding, molding or coating this product, verify that these processes do not affect the quality of capacitor by testing the performance of the bonded, molded or coated product in the intended equipment.

在粘合、树脂涂层、封膜的干燥、硬化条件使用到有机溶剂(乙酸乙酯、甲基乙酮、甲苯等), 可能会破坏电容器的包封树脂, 而造成短路不良。

In case the amount of applications, dryness/hardening conditions of adhesives and molding resins containing organic solvents (ethyl acetate, methyl ethyl ketone, toluene, etc.) are unsuitable, the outer coating resin of a capacitor is damaged by the organic solvents and it may result, worst case, in a short circuit.

粘合、树脂涂层、封膜厚度的偏差可能会在冷却与加热过程中使电容器的包封树脂和/或陶瓷介质破裂。

The variation in thickness of adhesive, molding resin or coating may cause outer coating resin cracking and/or ceramic element cracking of a capacitor in a temperature cycling.

10.4.4. 清洗(超声波清洗), Cleaning (ultrasonic cleaning)

要进行超声波清洗, 应遵守下列条件。

To perform ultrasonic cleaning, observe the following conditions.

清洗槽容量: 每升输出功率 20 瓦特或以下。

Rinse bath capacity: Output of 20 watts per liter or less.

清洗时间: 最多 5 分钟。

Rinsing time: 5 min. maximum.

不得直接振动 PCB/PWB。

Do not vibrate the PCB/PWB directly.

过度的超声波清洗会导致导线的过载损坏。

Excessive ultrasonic cleaning may lead to fatigue destruction of the lead wires.