




Rev.	Description	Date
A0	New release	2023.01.13

1. PHYSICAL CHARACTERISTICS (mm)

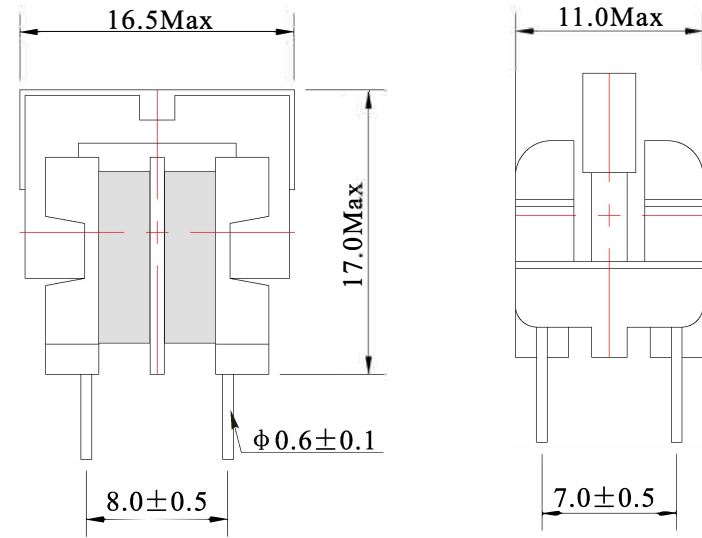

2. ELECTRICAL SCHEMATIC

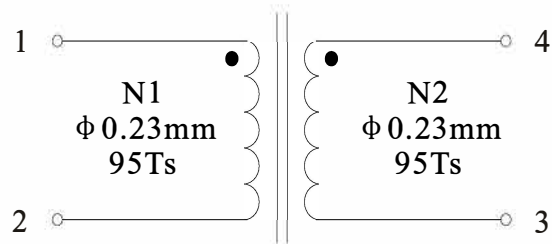

3. ELECTRICAL SPECIFICATIONS

- L: 22mH Min@1KHz,0.3V
- DCR: 1.38 Ω Max
- Rated current: 250mA Max
- Rated voltage: 250Vac
- Hi-Pot: 3750Vac N1 to N2
- Operating temperature: -40°C to +105°C

Test Instrument: L: HP4284A
RDC: HM2540

Note:

1. Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: >28%

NAME:	Common mode chokes		
CUSTOMER P/N:	L-KLS18-UU9.8-223Y-0.25A	DATE:	2023-01-13
P/N:	L-KLS18-UU9.8-223Y-0.25A	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	

