

# TERMINAL BLOCK Connector

## Wago LED connectors

KLS2-L77

### Specification:

[Poles]:01P

[Contact resistance]: $\leq 20\text{m}\Omega$


[Insulation resistance]: $\geq 800\text{M}\Omega$

[Rated voltage]:250V AC DC


[Rated current]:3.0A AC DC

[Withstand voltage]:1500V AC/minute


[Temperature range]: $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$

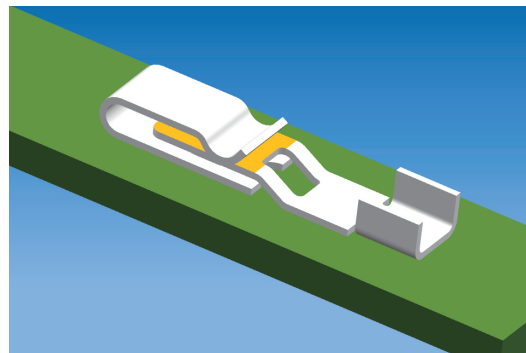

Assembly Layout




L059A




L059B

SMT type

L059A



L059B



## ORDER INFORMATION

Product NO.: KLS2-L77

Pos. NO. \_\_\_\_\_ Series No. \_\_\_\_\_