


REV	ECRN	DATE
1	NEW PRODUCTION	20170628

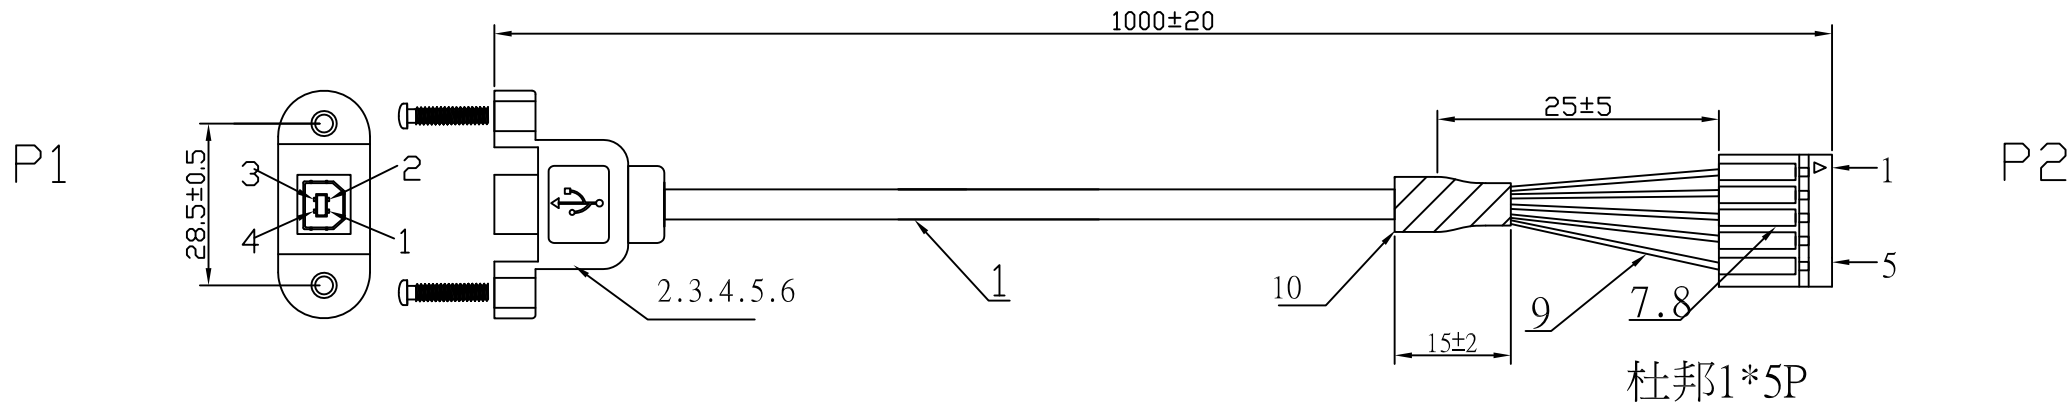

模具编号：P-42 P-43 P-64

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MIS WIRE TEST.
2. CONTACT RESISTANCE: 10 ohm.
3. INSULATOR RESISTANCE: 5M ohm.
4. HIGH VOLTAGE: DC 300V 0.01sec.
5. MUST BE ROHS COMPLIANT.

PIN WIRING

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SHELL	DRAIN WIRE	5

NO.	PART NO	ITEM	DESCRIPTION	QTY	UNIT
⑩	F.0451B0.0100R	TUBE	φ4.5*15mm HEAT TUBE COLOR BLACK	1	PCS
⑨	F.0451B0.0100R	TUBE	φ1.0*30mm HEAT TUBE COLOR BLACK	1	PCS
⑧	E.00254M.0500R	HOUSING	Dupont 2.54mm 1*5P HOUSING	1	PCS
⑦	D.00254F.1400R	TERMINAL	Dupont 2.54mm TERMINAL	5	PCS
⑥	J.000008.0500R	TIN WIRE	TIN WIRE OD:0.8MM	1.5	G
⑤	C.000000.0000R	MOLDING	PE	4.5	G
④	C.045P00.0102R	MOLDING	PVC 45P WHITE (WH404)	11.5	G
③	G.035523.3100R	SCREW	M3 NUT& M3 OD:3.0*Length 14mm SCREW	4	PCS
②	B.01004F.0N01R	CONNECTOR	USB B/F 4PIN GOLDDED PLATED SHELL NICKEL PLASTIC: WHITE	1	PCS
①	A.011X00.0402R	CABLE	UL2725 28AWG(7/0.12TC)*1P(WHITE, GREEN)+24AWG (11/0.16TC)*2C (RED, BLACK)+AL+B(64/0.10CCAM) OD=4.5MM JACK PVC 60P WHITE (WH404) L=1000MM	1	PCS

RoHS COMPLIANT		NINGBO KLS ELECTRONIC CO.,LTD	
DRAWN BY		比例: FREE	TITLE: USB B/F(带耳朵) TO 杜邦2.54 5P
CHECKED BY		单位: mm	USBBJ-1/WH
APPROVED BY		CUSTOMER:	
 开乐亿启 2017.08.17 李军		CUSTOMER'S ITEM:	
		DRAWING NO. ACCA-1731	DATE 2017.06.28