


P.C.B. LAYOUT



TYPE	CIRCUIT CHARACTERISTIC																
	CODE	POSITION ● ON															
		0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
DRR 3016	1	●		●		●		●		●		●		●		●	
	2		●	●			●	●			●	●			●	●	
	4				●	●	●	●					●	●	●	●	
	8								●	●	●	●	●	●	●	●	●

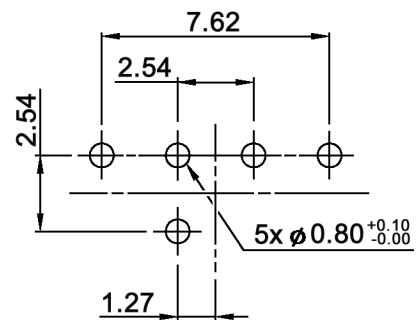

Tolerances: ±0.20mm max.	Date	Name
	12/07	dr
Specifications	02/09	dr
Dimensions	02/09	dr
Operating temperature	04/08	dr
Modifications	Date	Name

DRR 3016

knitter-switch

30 13 14


Page

1/2

Specifications:

Contact rating: non-switching: 100mA, 50V DC
switching: 30mA, 15V DC
Contact resistance: 100mOhm max.
Insulation resistance: 1 000MOhm min. at 250V DC
Dielectric strength: 250V AC for 1 minute
Operating temperature: -40°C to +85°C
Mechanical life: 20 000 cycles min.
Operating force: 250 gf.cm max.
Material: Base / cover: high-temp. thermoplastic nylon UL94V-0,
molded black
Movable contact: alloy copper, gold plated
Actuator: high-temp. thermoplastic nylon UL94V-0,
color: yellow
O-ring: silicone
Spring: stainless steel
Terminal: brass, gold plated

Soldering conditions: wave soldering: 260°C, 5sec. max.
through hole reflow: 260 +/-5°C, 4-6sec.

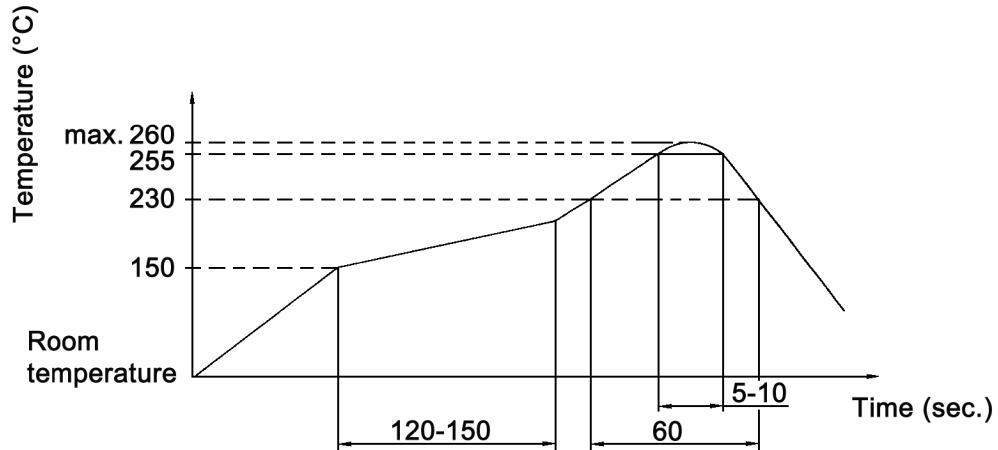

Tolerances: ±0.20mm max.			Date	Name	DRR 3016
			02/09	dr	
			knitter-switch		30 13 14
Modifications			Date	Name	Page 2/2