




Datasheet

LL44ZZ-DCPxxL52

Available Distribution



Dimensions

Part Number	Height	LxW
LL44ZZ-DCP30L52	9.35	280x62
LL44ZZ-DCP60L52	8.1	
LL44ZZ-DCP90L52	7.5	
LL44ZZ-DCP20110L52	9.07	
LL44ZZ-DCP70120L52	8.63	


*All dimensions are in millimeters.

LED




LUMILEDS
2835


Packaging Details (SPQ)



Recommend Applications



General Information




- Lens Material PC LUX2180T
- Operating Temperature -40°C~+110°C
- UL Flammability V-2 @1.5mm
- UL RTI Elec 130°C @1.5mm
- Light Transmission Rate 400nm~900nm > 90%
- ✓ If necessary, Clean lenses with mild soap, water and soft cloth.
- ⚠ Never use any commercial cleaning solvents on lenses, like alcohol.
- ⚠ Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.

Mechanical Specification

*All dimensions are in millimeters.

Lens Dimension

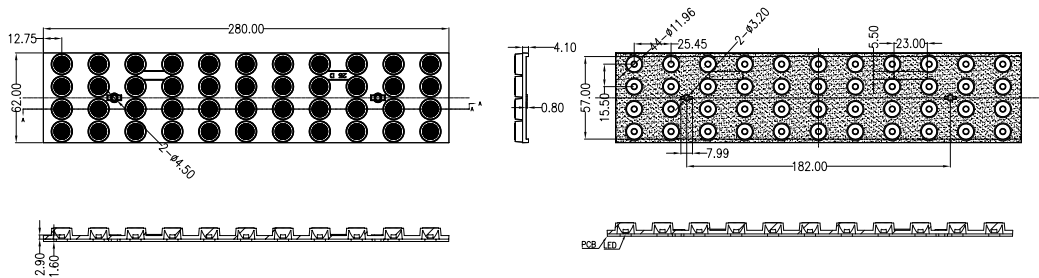


Assembly Instruction


Fixing Method



Luminarie
Accessories

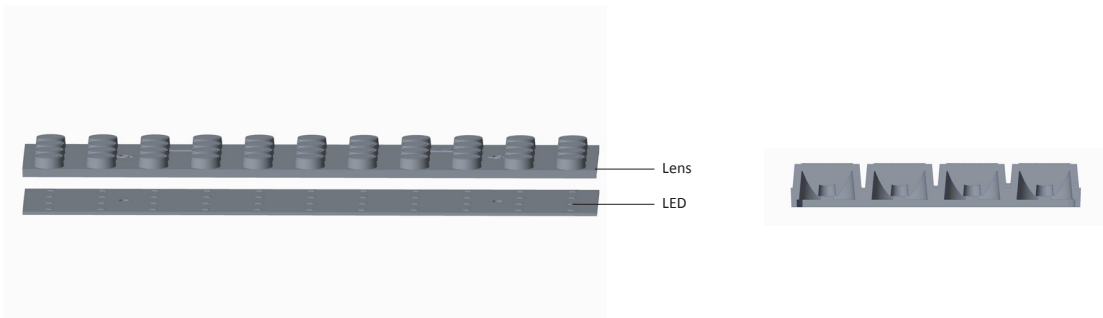

Photometric Distribution

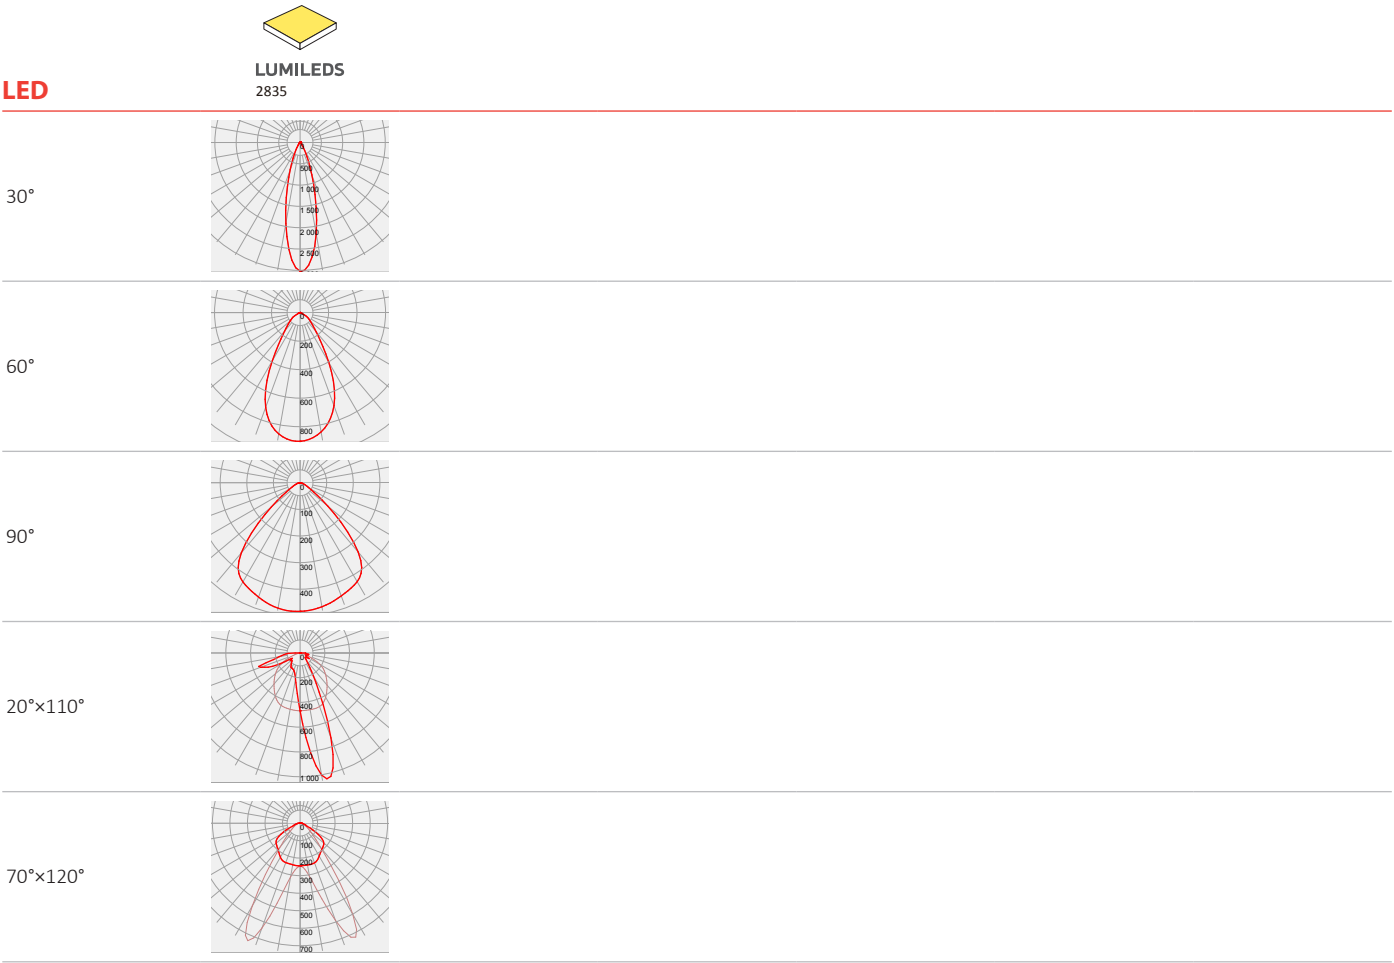

Details by LED

Part No	Accessories	LED Package Size	LED
LL44ZZ-DCP××L52	-	2835	 LUMILEDS 2835

LED	Part No	FWHM	cd / lm	IES
 LUMILEDS 2835	LL44ZZ-DCP30L52	27°	3.0	
	LL44ZZ-DCP60L52	56°	0.9	
	LL44ZZ-DCP90L52	89°	0.4	
	LL44ZZ-DCP20110L52	22°×108°	1.0	
	LL44ZZ-DCP70120L52	68°×118°	0.7	

Product Nomenclature

Ledlink Led Type Lens Angle

LL 44 ZZ- DCP 30 L52

Lens Dot Number Serial Number Type of Material

Ledlink Optics, Inc

Taiwan HQ

15F, No.655, Bannan Rd., Chung-Ho Dist.,
New Taipei City, Taiwan 235

Ledlink Optics (Dongguan) Co., Ltd

Dongguan Factory

No.5, TianKeng Industrial Dist., HengLi Town, DongGuan City,
GuangDong Province, China 523478

Ledlink Optics (Yangzhou) Co., Ltd

Yangzhou Factory

No.180, LinJiang Rd., YangZhou City, Jiangsu Province, China 225009

www.ledlink-optics.com

service@ledlink-optics.com

