


HZ1206E601R-10


**UNCONTROLLED
DOCUMENT**

PHYSICAL DIMENSIONS:

A	3.20 [.126]	+ 0.20 [.008]
B	1.60 [.063]	+ 0.20 [.008]
C	1.10 [.043]	+ 0.20 [.008]
D	0.51 [.020]	+ 0.25 [.010]

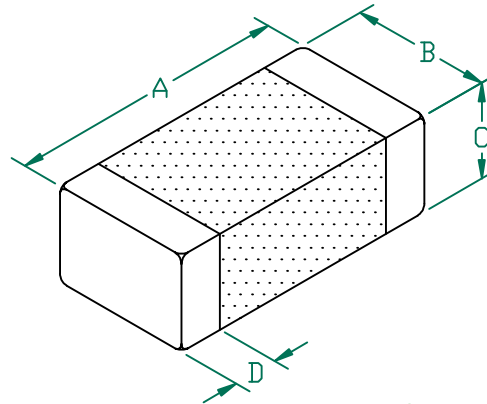

LAND PATTERNS FOR REFLOW SOLDERING

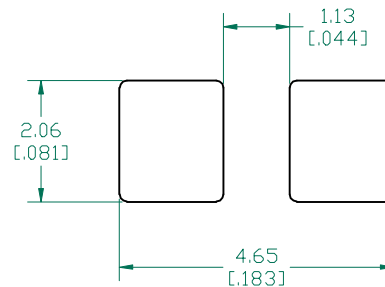



(For wave soldering, add 0.762 [.030] to this dimension)

ELECTRICAL CHARACTERISTICS:


Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	600	
Minimum	450	
Maximum	750	0.300 500 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 3000 PCS/REEL.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

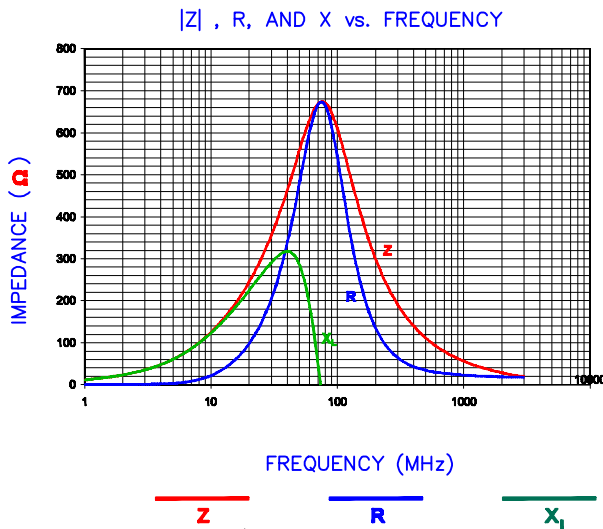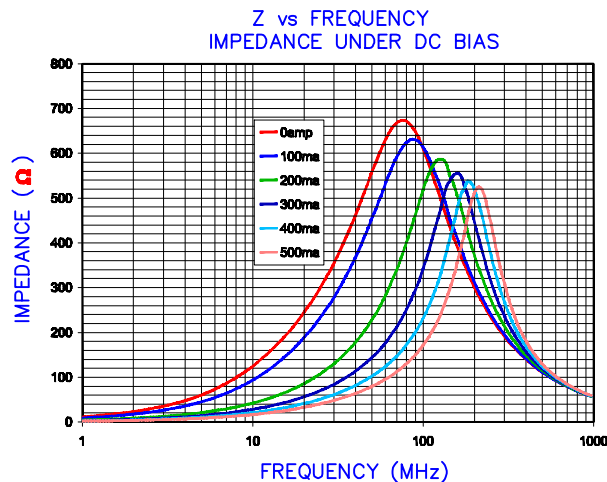

RECOMMENDED SOLDERING CONDITIONS

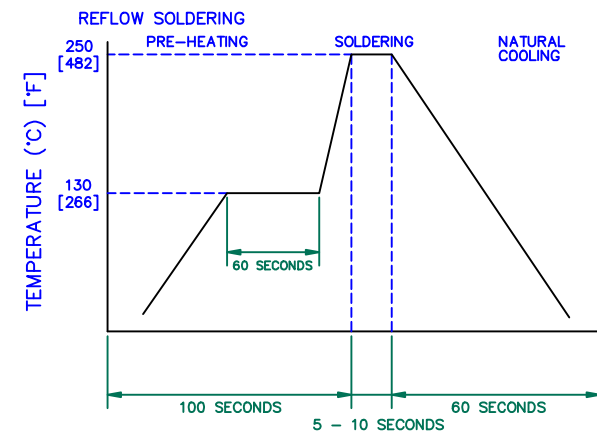

DIMENSIONS ARE IN mm [INCHES].

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.

**Laird
TECHNOLOGIES**

PROJECT/PART NUMBER:

HZ1206E601R-10

REV

B

PART TYPE:

CO-FIRE

DRAWN BY:

TMB

DATE:

04/03/04

SCALE:

NTS

SHEET:

2 of 2

RoHS
2002/95/EC

REV	DESCRIPTION	DATE	INT	CAD #	DATE	INT	CAD #
B	UPDATE COMPANY LOGO ADD ROHS	03/25/08	JRK		04/03/04	TMB	
A	ORIGINAL DRAFT	04/03/04	TMB				
REV	DESCRIPTION	DATE	INT	CAD #	DATE	INT	CAD #