

# Surface Mount RF Transformer

50Ω 10 to 1900 MHz

## TC4-19X+



CASE STYLE: AT1521  
 PRICE: \$2.09 ea. QTY (20)  
 \$1.09 ea. QTY (100)

**+RoHS Compliant**  
 The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

### Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25 W
DC Current	30 mA

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	3
SECONDARY	1
SECONDARY CT	2

### Features

- wideband, 10-1900 MHz
- balanced transmission line with secondary center tap
- plastic base with leads
- aqueous washable

### Applications


- PCS
- cellular

### Transformer Electrical Specifications


Ω RATIO (Secondary/Primary)	FREQ. (MHz)	INSERTION LOSS*			PHASE UNBALANCE (Deg.) Typ.		AMPLITUDE UNBALANCE (dB) Typ.	
		3 dB MHz	2 dB MHz	1 dB MHz	1 dB bandwidth	2 dB bandwidth	1 dB bandwidth	2 dB bandwidth
4	10-1900	10-1900	20-1000	30-700	4	6	0.3	0.5

\* Insertion Loss is referenced to mid-band loss, 1.0 dB typ.

### Outline Drawing AT1521

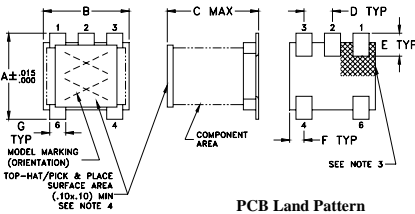

#### PCB Land Pattern





- Notes:  
 1. Case Material: Plastic  
 2. Termination Finish: Tin plate over Nickel plate.  
 3. Lead#1 Identifier shall be located in the cross-hatched area shown, on bottom view. Identifier may be either a molded or marked feature.  
 4. Top-Hat total thickness: .013 inches max.

### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.15	

### Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (deg.)
10.00	1.24	16.03	0.06	0.03
50.00	1.04	19.54	0.04	0.39
100.00	0.99	19.98	0.01	0.83
500.00	1.13	14.68	0.02	3.20
700.00	1.24	12.43	0.17	3.49
1000.00	1.55	9.92	0.49	3.74
1200.00	1.80	8.83	0.85	3.53
1500.00	2.34	7.69	1.47	3.59
1700.00	2.64	7.26	1.74	4.43
1900.00	2.99	7.01	1.95	4.99

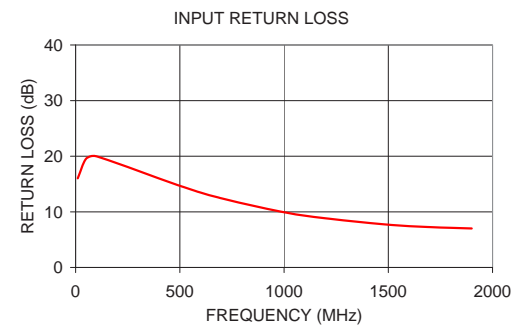

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)

