


# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

Зверніть увагу, що дані, відображені в цьому PDF-документі, згенеровані з нашого інтернет-каталогу. Дивіться повні дані в документації користувача. Діють наші загальні положення та умови користування, що стосуються завантажень.



Feed-through terminal block, nom. voltage: 1000 V, nominal current: 41 A, connection method: Push-in connection, Rated cross section: 6 mm<sup>2</sup>, cross section: 0.5 mm<sup>2</sup> - 10 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: blue

## Переваги

- The Push-in connection terminal blocks are characterized by the system features of the CLIPLINE complete system and by easy and tool-free wiring of conductors with ferrules or solid conductors
- In addition to the testing facility in the double function shaft, all terminal blocks provide an additional test connection
- The compact design and front connection enable wiring in a confined space
- Tested for railway applications

## Комерційні дані

Артикул	3211819
Пакувальна одиниця	50 Шт.
Мінімальний обсяг замовлення	1 Шт.
Код виробу	BE2211
Сторінка каталогу	Сторінка111C-1-2019
GTIN	4046356494663
Маса штуки (з упаковкою)	14,92 g
Маса штуки (без упаковки)	14,8 g
Митний тарифний номер	85369010
Країна походження	CN

# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Технічні характеристики

### Product properties

Product type	Feed-through terminal block
Number of positions	1
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	2
Number of rows	1
Potentials	1

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Electrical properties

Rated surge voltage	8 kV
Maximum power dissipation for nominal condition	1.31 W

### Connection data

Number of connections per level	2
Nominal cross section	6 mm <sup>2</sup>
Stripping length	10 mm ... 12 mm
Internal cylindrical gage	A5
Conductor cross section solid	0.5 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Cross section AWG	20 ... 8
Conductor cross section flexible	0.5 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	20 ... 8
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> When using TWIN ferrules, we recommend a minimum ferrule length of 13 mm.
Nominal current	41 A
Maximum load current	52 A (with 10 mm <sup>2</sup> conductor cross section, rigid)
Nominal voltage	1000 V
Nominal cross section	6 mm <sup>2</sup>

### Connection cross sections directly pluggable

Conductor cross section solid	1 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Flexible conductor cross section flexible (ferrule, w/o plastic sleeve)	1 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	1 mm <sup>2</sup> ... 6 mm <sup>2</sup>

# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Ex data

### Rated data (ATEX/IECEX)

ATEX certificate	SEV 13 ATEX 0159 U
IEC Ex certificate	IECEX SEV 13.0005 U
Identification	□ II 2 GD Ex eb IIC Gb
Operating temperature range	-60 °C ... 110 °C
Ex-certified accessories	3212044 D-PT 6 3024481 ATP-ST 6 1204520 SZF 2-0,8X4,0 3022276 CLIPFIX 35-5 3022218 CLIPFIX 35
Bridge data	35 A / 6 mm <sup>2</sup>
Ex temperature increase	40 K (36.5 A / 6 mm <sup>2</sup> )
Rated voltage	550 V
for bridging with bridge	550 V
- At bridging between non-adjacent terminal blocks	275 V
- At bridging between non-adjacent terminal blocks via PE terminal block	275 V
- At cut-to-length bridging	220 V
- At cut-to-length bridging with cover	275 V
- At cut-to-length bridging with partition plate	550 V
Rated insulation voltage	500 V

### Ex level General

Rated current	36.5 A
Maximum load current	46 A
Contact resistance	0.48 mΩ

### Ex connection data General

Nominal cross section	6 mm <sup>2</sup>
Rated cross section AWG	10
Connection capacity rigid	0.5 mm <sup>2</sup> ... 10 mm <sup>2</sup>
Connection capacity AWG	20 ... 8
Connection capacity flexible	0.5 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Connection capacity AWG	20 ... 10

## Dimensions

Width	8.2 mm
End cover width	2.2 mm
Height	42.2 mm
Height NS 35/15	51 mm
Height NS 35/7,5	43.5 mm
Length	57.7 mm

# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Material specifications

Color	blue
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Electrical tests

### Surge voltage test

Test voltage setpoint	9.8 kV
Result	Test passed

### Temperature-rise test

Requirement temperature-rise test	Increase in temperature $\leq 45$ K
Result	Test passed
Short-time withstand current 6 mm <sup>2</sup>	0.72 kA
Result	Test passed

### Power-frequency withstand voltage

Test voltage setpoint	2.2 kV
Result	Test passed

## Mechanical properties

### Mechanical data

Open side panel	Yes
-----------------	-----

## Mechanical tests

### Mechanical strength

Result	Test passed
--------	-------------

### Attachment on the carrier

DIN rail/fixing support	NS 35
Test force setpoint	5 N

# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

Result	Test passed
Test for conductor damage and slackening	
Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.5 mm <sup>2</sup> / 0.3 kg
	6 mm <sup>2</sup> / 1.4 kg
	10 mm <sup>2</sup> / 2 kg
Result	Test passed

## Environmental and real-life conditions

### Aging

Temperature cycles	192
	192
Result	Test passed
	Test passed

### Needle-flame test

Time of exposure	30 s
Result	Test passed

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

### Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C

# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

## Mounting

Mounting type	NS 35/7,5
	NS 35/15

# Feed-through terminal block - PT 6 BU


3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>



Креслення

Circuit diagram

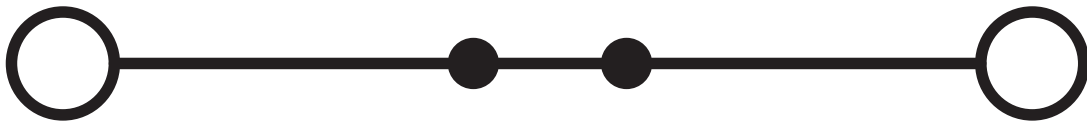

# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Відповідність стандартам

<b>DNV</b> Ідентифікатор відповідності: TAE000010T				
	Номинальна напруга $U_N$	Номинальний струм $I_N$	Поперечний переріз AWG	Поперечний переріз $\text{мм}^2$
			-	-

<b>CSA</b> Ідентифікатор відповідності: 13631				
	Номинальна напруга $U_N$	Номинальний струм $I_N$	Поперечний переріз AWG	Поперечний переріз $\text{мм}^2$
Use group B	600 V	40 A	20 - 8	-
Use group C	600 V	40 A	20 - 8	-
Use group D	600 V	5 A	20 - 8	-

<b>CB Scheme</b> Ідентифікатор відповідності: DE1-64280				
--	--	--	--	--

<b>EAC</b> Ідентифікатор відповідності: RU C-DE.BL08.B.00644				
---	--	--	--	--

<b>cULus Recognized</b> Ідентифікатор відповідності: E60425				
	Номинальна напруга $U_N$	Номинальний струм $I_N$	Поперечний переріз AWG	Поперечний переріз $\text{мм}^2$
Use group B	600 V	40 A	20 - 8	-
Use group C	600 V	40 A	20 - 8	-
Use group F	1000 V	40 A	20 - 8	-

<b>LR</b> Ідентифікатор відповідності: 12/20038 (E3)				
---	--	--	--	--

<b>ClassNK</b> Ідентифікатор відповідності: 21ME0004				
---	--	--	--	--



# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>



**RS**

Ідентифікатор відповідності: 17.00013.272



**BV**

Ідентифікатор відповідності: 37796/B1 BV



**VDE Zeichengenehmigung**

Ідентифікатор відповідності: 40035239

	Номинальна напруга $U_N$	Номинальний струм $I_N$	Поперечний переріз AWG	Поперечний переріз $\text{мм}^2$
Only flexible conductors	1000 V	41 A	-	0.5 - 6
Only rigid conductors	1000 V	41 A	-	0.5 - 10



**PRS**

Ідентифікатор відповідності: TE/2107/880590/21

**ABS**

Ідентифікатор відповідності: 21-2192245-PDA



**cUL Recognized**

Ідентифікатор відповідності: E192998

	Номинальна напруга $U_N$	Номинальний струм $I_N$	Поперечний переріз AWG	Поперечний переріз $\text{мм}^2$
	550 V	40 A	20 - 8	-



**EAC Ex**

Ідентифікатор відповідності: RU C-DE.AB72.B.02351



**IECEX**

Ідентифікатор відповідності: IECEX SEV13.0005U



**UL Recognized**

Ідентифікатор відповідності: E192998

	Номинальна напруга $U_N$	Номинальний струм $I_N$	Поперечний переріз AWG	Поперечний переріз $\text{мм}^2$
	550 V	40 A	20 - 8	-

# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>



**ATEX**

Ідентифікатор відповідності: SEV13ATEX0159U



**CCC**

Ідентифікатор відповідності: 2020322313000631



**NEPSI**

Ідентифікатор відповідності: GYJ20.1198U

**cULus Recognized**

# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Класифікації

### ECLASS

ECLASS-9.0	27141120
ECLASS-10.0.1	27141120
ECLASS-11.0	27141120

### ETIM

ETIM 8.0	EC000897
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Акcesуари

**i** Примітка. Використання деяких із наведених далі компонентів може обмежити функціональність виробу.

### Plug-in bridge

Plug-in bridge - FBS 2-8 - 3030284

<https://www.phoenixcontact.com/ua/produkcija/3030284>



Plug-in bridge, pitch: 8.2 mm, color: red

**i** Max. current carrying capacity: 41 A

### Plug-in bridge

Plug-in bridge - FBS 3-8 - 3030297

<https://www.phoenixcontact.com/ua/produkcija/3030297>



Plug-in bridge, pitch: 8.2 mm, color: red

**i** Max. current carrying capacity: 41 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBS 4-8 - 3030307

<https://www.phoenixcontact.com/ua/produkcija/3030307>

Plug-in bridge, pitch: 8.2 mm, color: red



 Max. current carrying capacity: 41 A

---


## Plug-in bridge

Plug-in bridge - FBS 5-8 - 3030310

<https://www.phoenixcontact.com/ua/produkcija/3030310>

Plug-in bridge, pitch: 8.2 mm, color: red



 Max. current carrying capacity: 41 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBS 6-8 - 3032470

<https://www.phoenixcontact.com/ua/produkcija/3032470>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 41 A

---


## Plug-in bridge

Plug-in bridge - FBS 10-8 - 3030323

<https://www.phoenixcontact.com/ua/produkcija/3030323>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 41 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBS 2-8 CT - 3033830

<https://www.phoenixcontact.com/ua/produkcija/3033830>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 41 A

---


## Plug-in bridge

Plug-in bridge - FBS 3-8 CT - 3033831

<https://www.phoenixcontact.com/ua/produkcija/3033831>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 41 A

---



# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBS 4-8 CT - 3033832

<https://www.phoenixcontact.com/ua/produkcija/3033832>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 41 A

---


## Plug-in bridge

Plug-in bridge - FBS 10-8 CT - 3033833

<https://www.phoenixcontact.com/ua/produkcija/3033833>



Plug-in bridge, pitch: 8.2 mm, color: orange

 Max. current carrying capacity: 41 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBS 2-8 BU - 3032567

<https://www.phoenixcontact.com/ua/produkcija/3032567>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A

---


## Plug-in bridge

Plug-in bridge - FBS 3-8 BU - 3032570

<https://www.phoenixcontact.com/ua/produkcija/3032570>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBS 4-8 BU - 3032583

<https://www.phoenixcontact.com/ua/produkcija/3032583>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A

---


## Plug-in bridge

Plug-in bridge - FBS 5-8 BU - 3032596

<https://www.phoenixcontact.com/ua/produkcija/3032596>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBS 6-8 BU - 3032677

<https://www.phoenixcontact.com/ua/produkcija/3032677>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A

---


## Plug-in bridge

Plug-in bridge - FBS 10-8 BU - 3032606

<https://www.phoenixcontact.com/ua/produkcija/3032606>



Plug-in bridge, pitch: 8.2 mm, color: blue

 Max. current carrying capacity: 41 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBS 2-8 GY - 3032621

<https://www.phoenixcontact.com/ua/produkcija/3032621>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 41 A

---


## Plug-in bridge

Plug-in bridge - FBS 3-8 GY - 3032622

<https://www.phoenixcontact.com/ua/produkcija/3032622>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 41 A

---

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBS 4-8 GY - 3032635

<https://www.phoenixcontact.com/ua/produkcija/3032635>

Plug-in bridge, pitch: 8.2 mm, color: gray



 Max. current carrying capacity: 41 A

---


## Plug-in bridge

Plug-in bridge - FBS 5-8 GY - 3032648

<https://www.phoenixcontact.com/ua/produkcija/3032648>

Plug-in bridge, pitch: 8.2 mm, color: gray



 Max. current carrying capacity: 41 A

---

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBS 6-8 GY - 3032664

<https://www.phoenixcontact.com/ua/produkcija/3032664>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 41 A

---


## Plug-in bridge

Plug-in bridge - FBS 10-8 GY - 3032651

<https://www.phoenixcontact.com/ua/produkcija/3032651>



Plug-in bridge, pitch: 8.2 mm, color: gray

 Max. current carrying capacity: 41 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Short-circuit connector

Short-circuit connector - FBSRH 2-8 - 3033802

<https://www.phoenixcontact.com/ua/produkcija/3033802>



Short-circuit connector, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

---


## Short-circuit connector

Short-circuit connector - FBSRH 3-8 - 3033803

<https://www.phoenixcontact.com/ua/produkcija/3033803>



Short-circuit connector, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

---



# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Short-circuit connector

Short-circuit connector - FBSRH 4-8 - 3033804

<https://www.phoenixcontact.com/ua/produkcija/3033804>



Short-circuit connector, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

---


## Plug-in bridge

Plug-in bridge - FBSR 2-8 - 3033808

<https://www.phoenixcontact.com/ua/produkcija/3033808>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBSR 3-8 - 3001597

<https://www.phoenixcontact.com/ua/produkcija/3001597>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

---


## Plug-in bridge

Plug-in bridge - FBSR 4-8 - 3000585

<https://www.phoenixcontact.com/ua/produkcija/3000585>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Plug-in bridge

Plug-in bridge - FBSR 5-8 - 3033809

<https://www.phoenixcontact.com/ua/produkcija/3033809>

Plug-in bridge, pitch: 8.2 mm, color: red



 Max. current carrying capacity: 32 A

---


## Plug-in bridge

Plug-in bridge - FBSR 10-8 - 3001599

<https://www.phoenixcontact.com/ua/produkcija/3001599>

Plug-in bridge, pitch: 8.2 mm, color: red



 Max. current carrying capacity: 32 A

# Feed-through terminal block - PT 6 BU

3211819


<https://www.phoenixcontact.com/ua/produkcija/3211819>



## Plug-in bridge

Plug-in bridge - FBSR 16-8 - 3033816

<https://www.phoenixcontact.com/ua/produkcija/3033816>



Plug-in bridge, pitch: 8.2 mm, color: red

 Max. current carrying capacity: 32 A

---

## Switching jumper

Switching jumper - SB-MER 2-8 - 3000587

<https://www.phoenixcontact.com/ua/produkcija/3000587>



Switching jumper, pitch: 8.2 mm, color: gray/orange

 Max. current carrying capacity: 24 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Switching jumper

Switching jumper - SB-MER 3-8 - 3000588

<https://www.phoenixcontact.com/ua/produkcija/3000588>



Switching jumper, pitch: 8.2 mm, color: gray/orange

 Max. current carrying capacity: 24 A

---


## Switching jumper

Switching jumper - SB-MER 4-8 - 3000589

<https://www.phoenixcontact.com/ua/produkcija/3000589>



Switching jumper, pitch: 8.2 mm, color: gray/orange

 Max. current carrying capacity: 24 A

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>




## Reducing bridge

Reducing bridge - RB ST 6-(2,5/4) - 3030860

<https://www.phoenixcontact.com/ua/produkcija/3030860>



Reducing bridge, pitch: 9 mm, color: red

 Max. current carrying capacity: 35 A

---


## Reducing bridge

Reducing bridge - RB 16-6 - 3047072

<https://www.phoenixcontact.com/ua/produkcija/3047072>



Reducing bridge, pitch: 12.2 mm, color: red

 Max. current carrying capacity: 37 A

---

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## End cover

End cover - D-PT 6 - 3212044

<https://www.phoenixcontact.com/ua/produkcija/3212044>

End cover, length: 57.7 mm, width: 2.2 mm, height: 36 mm, color: gray



---

## Partition plate

Partition plate - ATP-ST 6 - 3024481

<https://www.phoenixcontact.com/ua/produkcija/3024481>

Partition plate, length: 73.5 mm, width: 2 mm, height: 47.2 mm, color: gray



# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Screwdriver

Screwdriver - SZF 2-0,8X4,0 - 1204520

<https://www.phoenixcontact.com/ua/produkcija/1204520>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.8 x 4.0 x 100 mm, 2-component grip, with non-slip grip

---

## Mounting material

Mounting material - PT-IL - 3208090

<https://www.phoenixcontact.com/ua/produkcija/3208090>

Operating decal for the push-in Technology





# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Warning label

Warning label - WS PT 6 - 1029029

<https://www.phoenixcontact.com/ua/produkcija/1029029>



Warning label, yellow/black, labeled: Lightning flash, mounting type: plug in, for terminal block width: 8.2 mm

---

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 PERF 2000MM - 0801733

<https://www.phoenixcontact.com/ua/produkcija/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 UNPERF 2000MM - 0801681

<https://www.phoenixcontact.com/ua/produkcija/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 WH PERF 2000MM - 1204119

<https://www.phoenixcontact.com/ua/produkcija/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - 1204122

<https://www.phoenixcontact.com/ua/produkcija/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 AL UNPERF 2000MM - 0801704

<https://www.phoenixcontact.com/ua/produkcija/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## DIN rail perforated

DIN rail perforated - NS 35/ 7,5 ZN PERF 2000MM - 1206421

<https://www.phoenixcontact.com/ua/produkcija/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 ZN UNPERF 2000MM - 1206434

<https://www.phoenixcontact.com/ua/produkcija/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>



## DIN rail, unperforated

DIN rail, unperforated - NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - 0801762

<https://www.phoenixcontact.com/ua/produkcija/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

---

## End cap

End cap - NS 35/ 7,5 CAP - 1206560

<https://www.phoenixcontact.com/ua/produkcija/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## DIN rail perforated

DIN rail perforated - NS 35/15 PERF 2000MM - 1201730

<https://www.phoenixcontact.com/ua/produkcija/1201730>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 UNPERF 2000MM - 1201714

<https://www.phoenixcontact.com/ua/produkcija/1201714>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## DIN rail perforated

DIN rail perforated - NS 35/15 WH PERF 2000MM - 0806602

<https://www.phoenixcontact.com/ua/produkcija/0806602>



DIN rail perforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white, Pack of 25 (50 m)

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 WH UNPERF 2000MM-VPE 10 - 1204135

<https://www.phoenixcontact.com/ua/produkcija/1204135>



DIN rail, unperforated, similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 AL UNPERF 2000MM - 1201756

<https://www.phoenixcontact.com/ua/produkcija/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

## DIN rail perforated

DIN rail perforated - NS 35/15 ZN PERF 2000MM - 1206599

<https://www.phoenixcontact.com/ua/produkcija/1206599>



DIN rail perforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)



# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 ZN UNPERF 2000MM - 1206586

<https://www.phoenixcontact.com/ua/produkcija/1206586>



DIN rail, unperforated, similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15 CU UNPERF 2000MM-VPE 10 - 1201895

<https://www.phoenixcontact.com/ua/produkcija/1201895>



DIN rail, unperforated, similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## End cap

End cap - NS 35/15 CAP - 1206573

<https://www.phoenixcontact.com/ua/produkcija/1206573>

DIN rail end piece, for DIN rail NS 35/15



---

## DIN rail, unperforated

DIN rail, unperforated - NS 35/15-2,3 UNPERF 2000MM-VPE 10 - 1201798

<https://www.phoenixcontact.com/ua/produkcija/1201798>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver, Pack of 10 (20 m)

# Feed-through terminal block - PT 6 BU


3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Zack marker strip

Zack marker strip - ZB 8:UNBEDRUCKT - 1052002

<https://www.phoenixcontact.com/ua/produkcija/1052002>




Zack marker strip, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

---

## Zack marker strip

Zack marker strip - ZB 8 CUS - 0825011

<https://www.phoenixcontact.com/ua/produkcija/0825011>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Marker for terminal blocks

Marker for terminal blocks - UC-TM 8 - 0818072

<https://www.phoenixcontact.com/ua/produkcija/0818072>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

---

## Marker for terminal blocks

Marker for terminal blocks - UC-TM 8 CUS - 0824597

<https://www.phoenixcontact.com/ua/produkcija/0824597>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 56

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Marker for terminal blocks

Marker for terminal blocks - UCT-TM 8 - 0828740

<https://www.phoenixcontact.com/ua/produkcija/0828740>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

---

## Marker for terminal blocks

Marker for terminal blocks - UCT-TM 8 CUS - 0829616

<https://www.phoenixcontact.com/ua/produkcija/0829616>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 10.5 mm, Number of individual labels: 42

# Feed-through terminal block - PT 6 BU


3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Zack marker strip

Zack marker strip - ZB 8,LGS:FORTL.ZAHLEN - 1052015

<https://www.phoenixcontact.com/ua/produkcija/1052015>




Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

---

## Zack marker strip

Zack marker strip - ZB 8,QR:FORTL.ZAHLEN - 1052028

<https://www.phoenixcontact.com/ua/produkcija/1052028>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10. 5 x 8.15 mm, Number of individual labels: 10

# Feed-through terminal block - PT 6 BU


3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Marker for terminal blocks

Marker for terminal blocks - ZB 8,LGS:L1-N,PE - 1052413

<https://www.phoenixcontact.com/ua/produkcija/1052413>



Marker for terminal blocks, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 10.5 x 8.15 mm, Number of individual labels: 10

---

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 8:UNBEDRUCKT - 0808781

<https://www.phoenixcontact.com/ua/produkcija/0808781>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 8 CUS - 0825030

<https://www.phoenixcontact.com/ua/produkcija/0825030>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10

## Zack Marker strip, flat

Zack Marker strip, flat - ZBF 8,LGS:FORTL.ZAHLEN - 0808804

<https://www.phoenixcontact.com/ua/produkcija/0808804>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 101 ... 110, mounting type: snapped, for terminal block width: 8 mm, lettering field size: 5.15 x 8.15 mm, Number of individual labels: 10



# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Marker for terminal blocks

Marker for terminal blocks - UC-TMF 8 - 0818137

<https://www.phoenixcontact.com/ua/produkcija/0818137>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

---

## Marker for terminal blocks

Marker for terminal blocks - UC-TMF 8 CUS - 0824654

<https://www.phoenixcontact.com/ua/produkcija/0824654>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.6 x 5.1 mm, Number of individual labels: 56

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Marker for terminal blocks

Marker for terminal blocks - UCT-TMF 8 - 0828748

<https://www.phoenixcontact.com/ua/produkcija/0828748>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

---

## Marker for terminal blocks

Marker for terminal blocks - UCT-TMF 8 CUS - 0829672

<https://www.phoenixcontact.com/ua/produkcija/0829672>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 8.2 mm, lettering field size: 7.4 x 4.7 mm, Number of individual labels: 42

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Test plugs

Test plugs - MPS-MT - 0201744

<https://www.phoenixcontact.com/ua/produkcija/0201744>



Test plugs, with solder connection up to 1 mm<sup>2</sup> conductor cross section, color: gray

---

## Insulating sleeve

Insulating sleeve - MPS-IH WH - 0201663

<https://www.phoenixcontact.com/ua/produkcija/0201663>



Insulating sleeve, color: white

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Insulating sleeve

Insulating sleeve - MPS-IH RD - 0201676

<https://www.phoenixcontact.com/ua/produkcija/0201676>

Insulating sleeve, color: red




## Insulating sleeve

Insulating sleeve - MPS-IH BU - 0201689

<https://www.phoenixcontact.com/ua/produkcija/0201689>

Insulating sleeve, color: blue



# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Insulating sleeve

Insulating sleeve - MPS-IH YE - 0201692

<https://www.phoenixcontact.com/ua/produkcija/0201692>

Insulating sleeve, color: yellow



---

## Insulating sleeve

Insulating sleeve - MPS-IH GN - 0201702

<https://www.phoenixcontact.com/ua/produkcija/0201702>

Insulating sleeve, color: green



# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>



## Insulating sleeve

Insulating sleeve - MPS-IH GY - 0201728

<https://www.phoenixcontact.com/ua/produkcija/0201728>

Insulating sleeve, color: gray



---

## Insulating sleeve

Insulating sleeve - MPS-IH BK - 0201731

<https://www.phoenixcontact.com/ua/produkcija/0201731>

Insulating sleeve, color: black



# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Test adapter

Test adapter - PAI-4-FIX BU - 3032729

<https://www.phoenixcontact.com/ua/produkcija/3032729>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: blue

---

## Test adapter

Test adapter - PAI-4-FIX OG - 3034455

<https://www.phoenixcontact.com/ua/produkcija/3034455>



4 mm test adapter, for terminal blocks with 8.2 mm pitch

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Test adapter

Test adapter - PAI-4-FIX YE - 3032745

<https://www.phoenixcontact.com/ua/produkcija/3032745>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: yellow

---

## Test adapter

Test adapter - PAI-4-FIX RD - 3032732

<https://www.phoenixcontact.com/ua/produkcija/3032732>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: red



# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Test adapter

Test adapter - PAI-4-FIX GN - 3032758

<https://www.phoenixcontact.com/ua/produkcija/3032758>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: green

---

## Test adapter

Test adapter - PAI-4-FIX BK - 3032774

<https://www.phoenixcontact.com/ua/produkcija/3032774>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: black

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Test adapter

Test adapter - PAI-4-FIX GY - 3032790

<https://www.phoenixcontact.com/ua/produkcija/3032790>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: gray

---

## Test adapter

Test adapter - PAI-4-FIX VT - 3032761

<https://www.phoenixcontact.com/ua/produkcija/3032761>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 4.2 mm .. 8.2 mm pitch, color: violet

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Test adapter

Test adapter - PAI-4-FIX BN - 3032787

<https://www.phoenixcontact.com/ua/produkcija/3032787>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, color: brown

---

## Test adapter

Test adapter - PAI-4-FIX WH - 3032797

<https://www.phoenixcontact.com/ua/produkcija/3032797>



4 mm test adapter, for terminal blocks with 8.2 mm pitch

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Test adapter

Test adapter - PAIS-4-FIX GY - 3032791

<https://www.phoenixcontact.com/ua/produkcija/3032791>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: gray

---

## Test adapter

Test adapter - PAIS-4-FIX BK - 3032792

<https://www.phoenixcontact.com/ua/produkcija/3032792>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: black

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Test adapter

Test adapter - PAIS-4-FIX RD - 3032793

<https://www.phoenixcontact.com/ua/produkcija/3032793>



Test adapter, Do not plug in while the power is connected, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: red

---

## Test adapter

Test adapter - PAIS-4-FIX BU - 3032798

<https://www.phoenixcontact.com/ua/produkcija/3032798>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: blue

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Test adapter

Test adapter - PAIS-4-FIX YE - 3032799

<https://www.phoenixcontact.com/ua/produkcija/3032799>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: yellow

---

## Test adapter

Test adapter - PAIS-4-FIX GN - 3032801

<https://www.phoenixcontact.com/ua/produkcija/3032801>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: green

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Test adapter

Test adapter - PAIS-4-FIX VT - 3032802

<https://www.phoenixcontact.com/ua/produkcija/3032802>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 5.2 mm, 6.2 mm, and 8.2 mm pitch, color: violet

---

## Test plugs

Test plugs - PS-8 - 3031005

<https://www.phoenixcontact.com/ua/produkcija/3031005>



Test plugs, Modular test plug, color: red

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Spacer plate

Spacer plate - DP PS-8 - 3036741

<https://www.phoenixcontact.com/ua/produkcija/3036741>



Spacer plate, length: 22.4 mm, width: 8.2 mm, height: 29 mm, number of positions: 1, color: red

---

## Test plugs

Test plugs - PS-8/2,3MM RD - 3048564

<https://www.phoenixcontact.com/ua/produkcija/3048564>



Test plugs, color: red



# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Software

Software - PROJECT COMPLETE - 1050453

<https://www.phoenixcontact.com/ua/produkcija/1050453>



Intuitive planning and marking software for configuring terminal strips and for professional marking of marking materials for terminal blocks, conductors, cables, devices, and systems. The software is available for download

---

## End clamp

End clamp - E/UK - 1201442

<https://www.phoenixcontact.com/ua/produkcija/1201442>



End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## End clamp

End clamp - E/UK 1 - 1201413

<https://www.phoenixcontact.com/ua/produkcija/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

---

## Marker for terminal blocks

Marker for terminal blocks - TMT (EX9,5)R - 0828295

<https://www.phoenixcontact.com/ua/produkcija/0828295>



Marker for terminal blocks, Roll, white, unlabeled, can be labeled with: THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: snapped, snap into tall marker groove, lettering field size: 9.5 x 50000 mm, Number of individual labels: 1

# Feed-through terminal block - PT 6 BU

3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## Marker for terminal blocks

Marker for terminal blocks - US-TM 100 - 0829255

<https://www.phoenixcontact.com/ua/produkcija/0829255>



Marker for terminal blocks, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, lettering field size: 104 x 9.8 mm, Number of individual labels: 13

---

## End clamp

End clamp - CLIPFIX 35 - 3022218

<https://www.phoenixcontact.com/ua/produkcija/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

# Feed-through terminal block - PT 6 BU



3211819

<https://www.phoenixcontact.com/ua/produkcija/3211819>

## End clamp

End clamp - CLIPFIX 35-5 - 3022276

<https://www.phoenixcontact.com/ua/produkcija/3022276>




Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

---

## End clamp

End clamp - E/NS 35 N - 0800886

<https://www.phoenixcontact.com/ua/produkcija/0800886>



End clamp, width: 9.5 mm, color: gray

---

Phoenix Contact 2022 © - Усі права захищені  
<https://www.phoenixcontact.com>

ТОВ „Фенікс Контакт”  
03115 Україна, м.Київ вул. Краснова, 27

+ 380 44 594 55 22  
[ua-office@phoenixcontact.com](mailto:ua-office@phoenixcontact.com)